



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER		WIRE SIZE AWG	DIMENSIONS in.				HOUSING COLOR
PREFIX	PK		A $\pm .03$ $(\pm .8)$	B DIA. $\pm .01$ ($\pm .3$)	C $\pm .02$ $(\pm .3)$	D DIA.	
PV18-P47	-CY -MY	22-18 (1.5-1.0)	.97 (24,6)	.07 (1,8)	.49 (12,4)	.15 (3,8)	RED
PV14-P47	-C -M	16-14 (1.5-2.5)	.97 (24,6)	.07 (1,8)	.49 (12,4)	.17 (4,3)	BLUE
PV10-P55*	-LY -DY	12-10 (4.0-6.0)	1.10 (27,9)	.10 (2,5)	.55 (14,0)	.25 (6,35)	YELLOW

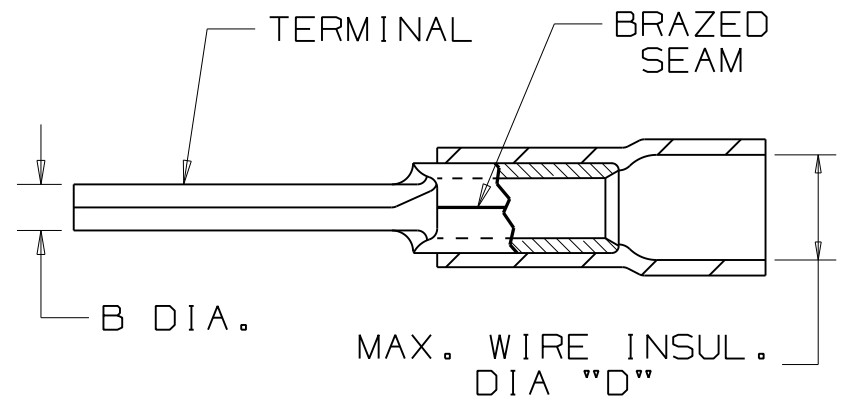

NOTES:

- RECOMMENDED FOR:
A. SOLID OR STRANDED COPPER WIRE
- MATERIAL:
A. STAMPING - COPPER, TIN PLATED
B. HOUSING - VINYL, COLOR CODED
- PACKAGE QTY: STD. PKG. -LY=50, -C, -CY=100
BULK PKG. -DY=500, -M, -MY=1000
- DIMENSIONS IN BRACKETS ARE IN mm or mm²
- Tools:
PANDUIT APPROVED: CT-100, CT-160,
CT-550CH, CT-500CH
(EXCEPT PV10-P55)CT-1550, CT-1551
- WIRE STRIP LENGTH 5/16 ^{+1/32}₋₀ (7,9 ^{+B}₋₀)

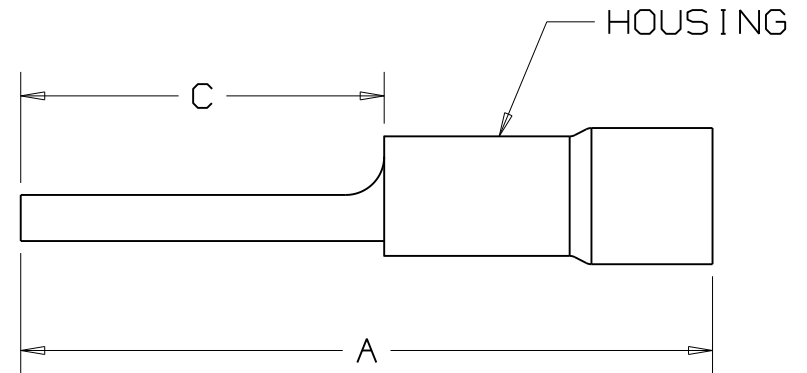

* Not UL Listed



LISTED
587H
E52164

PANDUIT CORP.

TINLEY PARK, ILLINOIS

VINYL INSULATED PIN TERMINAL

REV	DATE	BY	CHK	DESCRIPTION
11	6/11	SRB		Added asterisk for PV10-P55 *Not UL Listed

DRAWN BY DAW	CHK'D RLS	SCALE NONE	DRAWING NO. A41335
-----------------	--------------	---------------	-----------------------