


Model 2524 & 2524N WE-310 (PJ-051) Phone Plug Patch Cord Phone Plug Each End

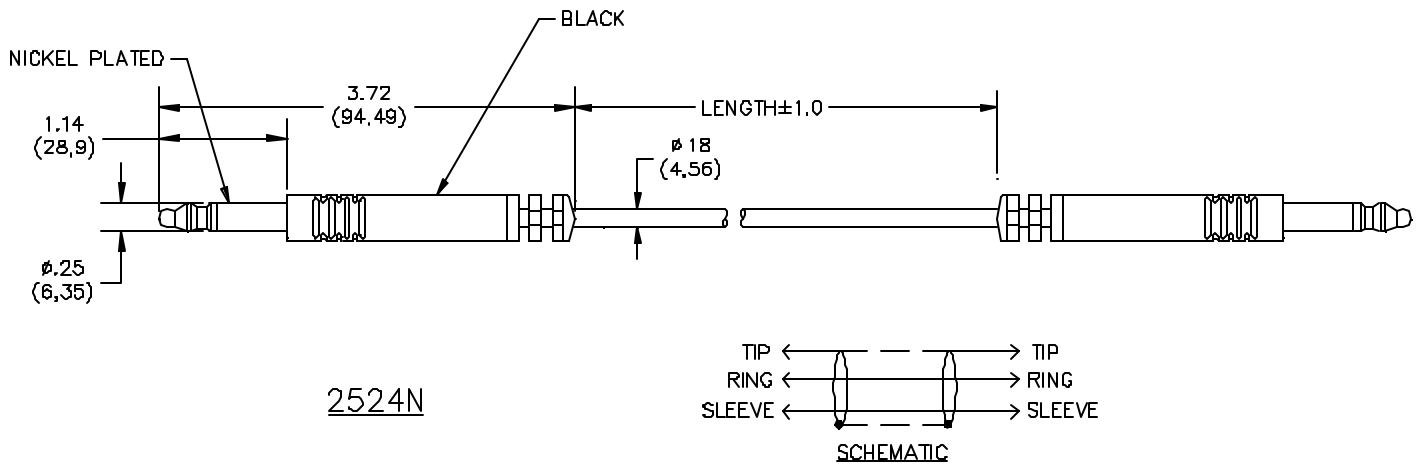

FEATURES:

- Shielded cable to reduce noise
- WE-310 Plugs molded to the cable for optimum durability
- Provides a quick connector between jacks
- Available in five lengths
- Nickel plated to insure good conductivity.

MATERIALS:

Plugs – Nickel plated brass

Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation

RATINGS:

Operating Voltage: 300 VRMS

Maximum Current; 3.36 Amperes @ 25°C

Operating Temperature: -20°C to +80°C

Nominal Capacitance Shield to Conductor

Nominal Capacitance Between Conductors

ORDERING INFORMATION: Model 2524N-J-XX

XX = Length in inches, Standard Lengths 18" (457 mm), 24" (616 mm), 36" (914 mm), 48" (1219 mm), 60" (20 mm)


All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.



Registered trademarks are the property of their respective companies.

Made in USA

Model 2524 & 2524N WE-310 (PJ-051) Phone Plug Patch Cord Phone Plug Each End

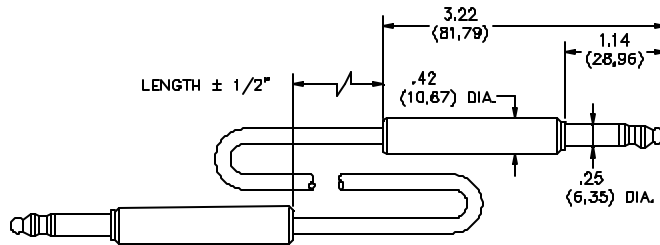

2524



FEATURES:

- Shielded cable to reduce noise (J cable type only)
- Provides a quick connector between jacks
- Available in five lengths

MATERIALS:

Plugs – Brass

Cable – A – 2 Conductor twisted pair, PVC jacket and insulation

Cable – J – Conductor shielded microphone cable, Nominal Capacitance Shield to Conductor – 20pf, Nominal Capacitance Between Conductors – 36pf

Marking – “Pomona Electronics 2524-X-XX”

RATINGS:

Operating Voltage: 500 VRMS

Maximum Current: 3.36 Amperes @ 25°C

Operating Temperature: -20°C to +80°C

ORDERING INFORMATION: Model 2524-X-XX

X = Cable Type

XX = Length in inches, Standard Lengths 18” (457 mm), 24” (616 mm), 36” (914 mm), 48” (1219 mm), 60” (20 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA