

Features

Unregulated Converters

- Micro Size SIP 6 Package
- Industry Standard Pinout
- Power Sharing on Dual Output Version
- 3kVDC Isolation
- Optional Continuous Short Circuit Protected
- Efficiency to 85 %

Description

The RBM Micro Size DC/DC-Converter complements Recom's industrial range of converters. This range is widely used for pcb distributed power systems and combines small package size, high efficiency, 3kVDC isolation and low output ripple.

The extended operating temperature range covering -40°C to $+85^{\circ}\text{C}$ is a standard feature. The full rated power can be taken from a single pin of this dual output converter, provided this does not exceed 1 Watt.

Selection Guide

| Part Number SIP 6 Micro Size | Input Voltage (VDC) | Output Voltage (VDC) | Output Current (mA) | Efficiency (%) | Max Capacitive Load ⁽¹⁾ |
|---------------------------------|---------------------|----------------------|---------------------|----------------|------------------------------------|
| RBM-xx05S | 5, 12 | 5 | 200 | 70-78 | 1000 μF |
| RBM-xx12S | 5, 12 | 12 | 83 | 78-80 | 470 μF |
| RBM-xx15S | 5, 12 | 15 | 66 | 80-84 | 470 μF |
| RBM-xx05D | 5, 12 | ± 5 | ± 100 | 74-78 | $\pm 470\mu\text{F}$ |
| RBM-xx12D | 5, 12 | ± 12 | ± 41 | 80-82 | $\pm 220\mu\text{F}$ |
| RBM-xx15D | 5, 12 | ± 15 | ± 33 | 80-84 | $\pm 220\mu\text{F}$ |

xx = Input Voltage. Other input and output voltage combinations available on request.

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RBM-0505S/P, RBM-0505D/P

Specifications (measured at $T_A = 25^{\circ}\text{C}$, nominal input voltage, full load and after warm-up)

| | | |
|---|---|--|
| Input Voltage Range | | $\pm 10\%$ |
| Output Voltage Accuracy | | $\pm 5\%$ |
| Line Voltage Regulation | | 1.2%/1% of V_{in} typ. |
| Load Voltage Regulation | 5V output type | 15% max |
| (10% to 100% full load) | 12, 15V output types | 10% max |
| Output Ripple and Noise (20MHz limited) | | 100mVp-p max. |
| Operating Frequency | | 50kHz min. / 100kHz typ. / 105kHz max. |
| Efficiency at Full Load | | 70% min. / 80% typ. |
| Minimum Load = 0% | Specifications valid for 10% minimum load only. | |
| Isolation Voltage | (tested for 1 second) | 3000VDC |
| | (rated for 1 minute**) | 1500VAC / 60Hz |
| Isolation Capacitance | | 20pF min. / 65pF max. |
| Isolation Resistance | | 15 G Ω min. |
| Short Circuit Protection | | 1 Second |
| P-Suffix | | Continuous |
| Operating Temperature Range (free air convection) | | -40°C to $+85^{\circ}\text{C}$ (see Graph) |
| Storage Temperature Range | | -55°C to $+125^{\circ}\text{C}$ |
| Relative Humidity | | 95% RH |
| Package Weight | | 1.3g |
| Packing Quantity | | 30 pcs per Tube |
| MTBF ($+25^{\circ}\text{C}$) | } Detailed Information see Application Notes chapter "MTBF" | using MIL-HDBK 217F |
| ($+85^{\circ}\text{C}$) | | using MIL-HDBK 217F |
| | | 1005 x 10^3 hours |
| | | 195 x 10^3 hours |

Certifications

| | | |
|-------------------|--|---|
| CB Test Report | Report: US/15348/UL | IEC 60950-1:2005 2nd Ed. |
| UL General Safety | Report: E358085 | UL 60950-1 2nd Ed. |
| EN General Safety | Report: SPCLVD1109103 | EN60950-1:2001 + A11:2004 |
| EN Medical Safety | Report: MDD1205098-4 + RM1205098-4IEC/EN 60601-1 3rd Edition | Medical Report + ISO14971 Risk Assessment |


ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM


1 Watt SIP 6 Micro Size, Single & Dual Output



EN-60950-1 Certified
UL-60950-1 Certified
EN-60601-1 Certified

RBM

Derating-Graph (Ambient Temperature)

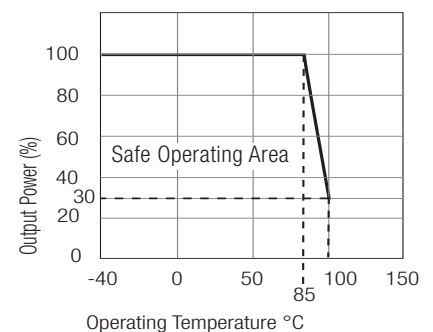

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.


Refer to Application Notes

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)


Notes
Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Typical Characteristics


RBM-xx05S

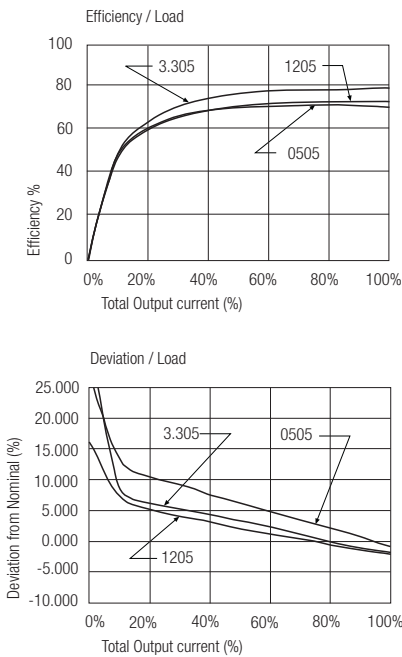


RBM-xx12S

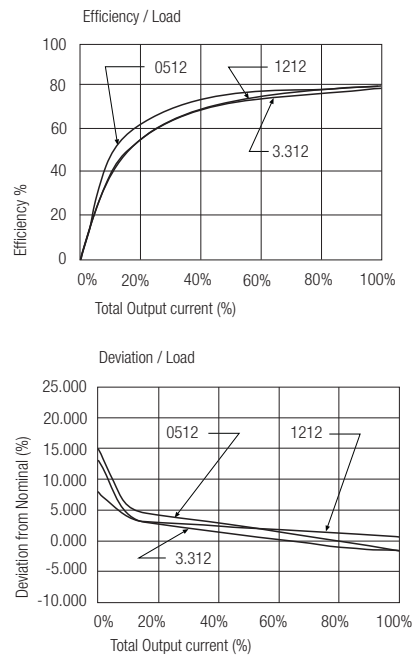

RBM-xx05D

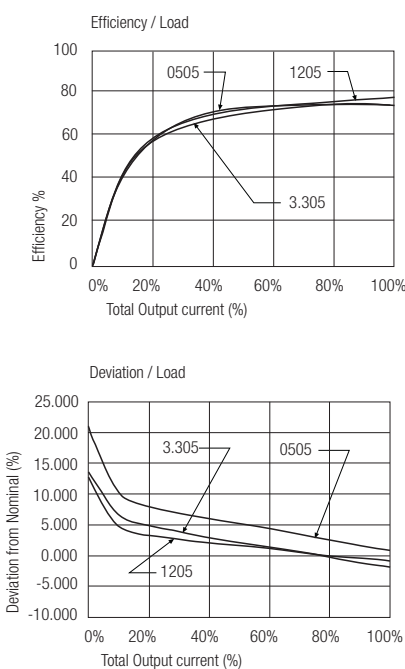


RBM-xx12D

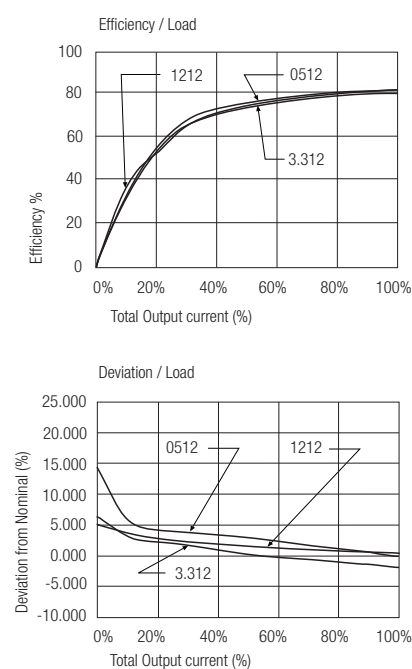


Typical Characteristics

RBM-xx15S

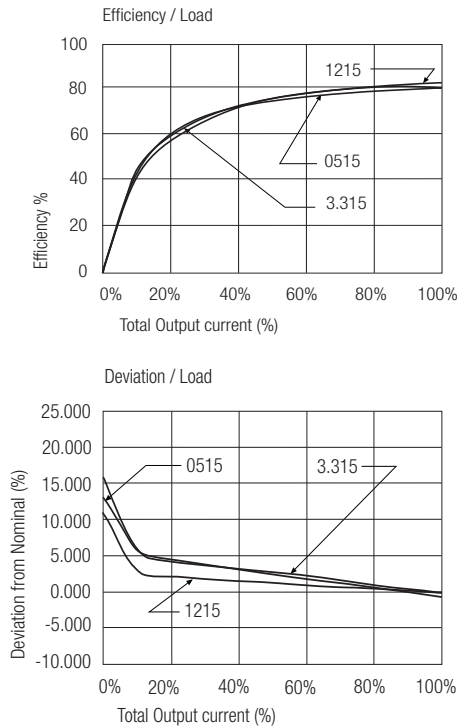


RBM-xx15D

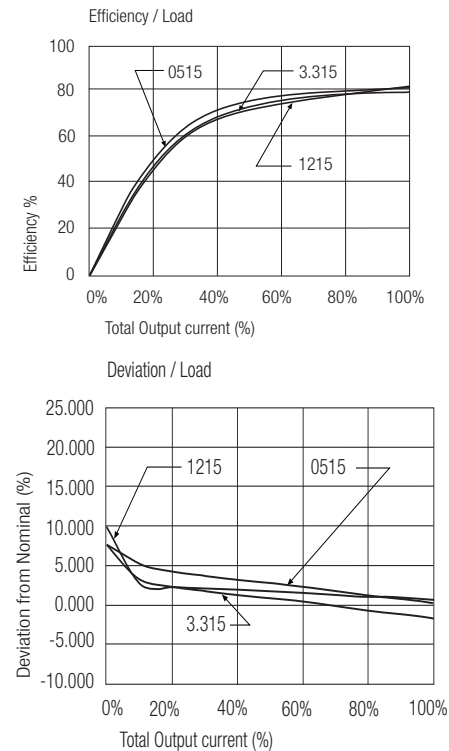


Package Style and Pinning (mm)

SIP6 Micro Size Package

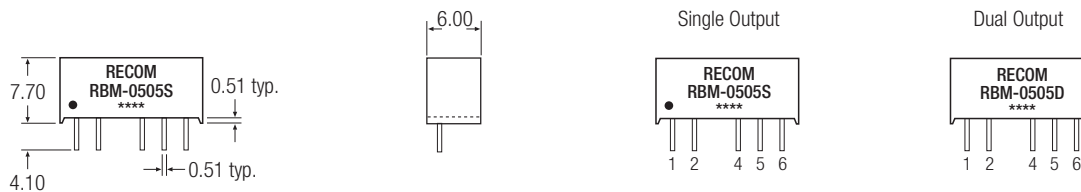

Recommended Footprint Details

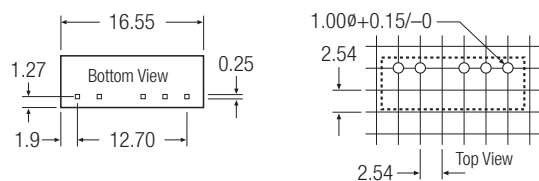

Pin Connections

| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 4 | NC | -Vout |
| 5 | -Vout | Com |
| 6 | +Vout | +Vout |

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.