



N-CHANNEL MOSFET

Qualified per MIL-PRF-19500/557

Qualified Levels:
JAN, JANTX, JANTXV
and JANS*


DESCRIPTION

This family of switching transistors is military qualified up to the JANTXV level for high-reliability applications. The 2N6798 part number is also qualified to the JANS level. These devices are also available in a low profile U-18 LCC surface mount package. Microsemi also offers numerous other transistor products to meet higher and lower power ratings with various switching speed requirements in both through-hole and surface-mount packages.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- JEDEC registered 2N6796, 2N6798, 2N6800 and 2N6802 number series.
- JAN, JANTX, and JANTXV qualifications are available per MIL-PRF-19500/557.
*JANS qualification is available on 2N6798 only.
(See [part nomenclature](#) for all available options.)
- RoHS compliant versions available (commercial grade only).




**TO-205AF (TO-39)
Package**

APPLICATIONS / BENEFITS

- Lightweight top-hat design with flexible terminals offers a variety of mounting flexibility.
- Military and other high-reliability applications.

Also available in:

U-18 LCC package

(surface mount)
 2N6796U, 2N6798U,
2N6800U & 2N6802U

MAXIMUM RATINGS @ T_A = +25 °C unless otherwise stated

Parameters / Test Conditions	Symbol	Value	Unit
Operating & Storage Junction Temperature Range	T _J & T _{stg}	-55 to +150	°C
Thermal Resistance Junction-to-Case	R _{θJC}	5.0	°C/W
Total Power Dissipation	P _T	@ T _A = +25 °C	0.8
		@ T _C = +25 °C ⁽¹⁾	25
Drain-Source Voltage, dc	V _{DS}	2N6796	100
		2N6798	200
		2N6800	400
		2N6802	500
Gate-Source Voltage, dc	V _{GS}	± 20	V
Drain Current, dc @ T _C = +25 °C ⁽²⁾	I _{D1}	2N6796	8.0
		2N6798	5.5
		2N6800	3.0
		2N6802	2.5
Drain Current, dc @ T _C = +100 °C ⁽²⁾	I _{D2}	2N6796	5.0
		2N6798	3.5
		2N6800	2.0
		2N6802	1.5
Off-State Current (Peak Total Value) ⁽³⁾	I _{DM}	2N6796	32
		2N6798	22
		2N6800	14
		2N6802	11
Source Current	I _S	2N6796	8.0
		2N6798	5.5
		2N6800	3.0
		2N6802	2.5

See notes on next page.

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

- Notes:**
1. Derate linearly 0.2 W/°C for $T_C > +25$ °C.
 2. The following formula derives the maximum theoretical I_D limit. I_D is also limited by package and internal wires and may be limited due to pin diameter.


$$I_D = \sqrt{\frac{T_J(\max) - T_C}{R_{\theta JC} \times R_{DS(on)} @ T_J(\max)}}$$

3. $I_{DM} = 4 \times I_{D1}$ as calculated in note 2.

MECHANICAL and PACKAGING

- CASE: Hermetically sealed, kovar base, nickel cap.
- TERMINALS: Tin/lead solder dip nickel plate or RoHS compliant pure tin plate (commercial grade only).
- MARKING: Part number, date code, manufacturer's ID.
- WEIGHT: Approximately 1.064 grams.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

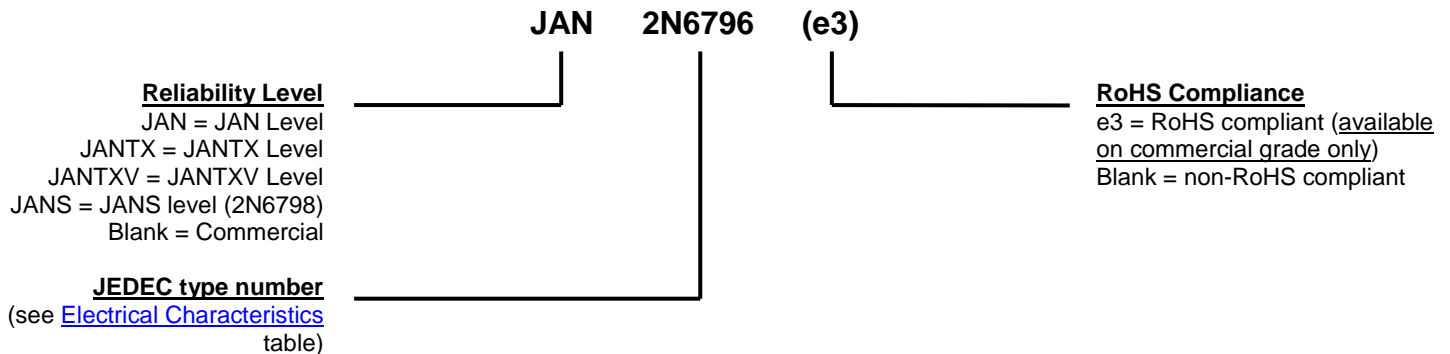

SYMBOLS & DEFINITIONS

Symbol	Definition
di/dt	Rate of change of diode current while in reverse-recovery mode, recorded as maximum value.
I_F	Forward current
R_G	Gate drive impedance
V_{DD}	Drain supply voltage
V_{DS}	Drain source voltage, dc
V_{GS}	Gate source voltage, dc

ELECTRICAL CHARACTERISTICS @ $T_A = +25\text{ }^\circ\text{C}$, unless otherwise noted

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Drain-Source Breakdown Voltage $V_{GS} = 0\text{ V}, I_D = 1.0\text{ mA}$	2N6796 2N6798 2N6800 2N6802 $V_{(BR)DSS}$	100 200 400 500		V
Gate-Source Voltage (Threshold) $V_{DS} \geq V_{GS}, I_D = 0.25\text{ mA}$ $V_{DS} \geq V_{GS}, I_D = 0.25\text{ mA}, T_J = +125\text{ }^\circ\text{C}$ $V_{DS} \geq V_{GS}, I_D = 0.25\text{ mA}, T_J = -55\text{ }^\circ\text{C}$	$V_{GS(th)1}$ $V_{GS(th)2}$ $V_{GS(th)3}$	2.0 1.0	4.0 5.0	V
Gate Current $V_{GS} = \pm 20\text{ V}, V_{DS} = 0\text{ V}$ $V_{GS} = \pm 20\text{ V}, V_{DS} = 0\text{ V}, T_J = +125\text{ }^\circ\text{C}$	I_{GSS1} I_{GSS2}		± 100 ± 200	nA
Drain Current $V_{GS} = 0\text{ V}, V_{DS} = 80\text{ V}$ $V_{GS} = 0\text{ V}, V_{DS} = 160\text{ V}$ $V_{GS} = 0\text{ V}, V_{DS} = 320\text{ V}$ $V_{GS} = 0\text{ V}, V_{DS} = 400\text{ V}$	2N6796 2N6798 2N6800 2N6802 I_{DSS1}		25	μA
Drain Current $V_{GS} = 0\text{ V}, V_{DS} = 80\text{ V}, T_J = +125\text{ }^\circ\text{C}$ $V_{GS} = 0\text{ V}, V_{DS} = 160\text{ V}, T_J = +125\text{ }^\circ\text{C}$ $V_{GS} = 0\text{ V}, V_{DS} = 320\text{ V}, T_J = +125\text{ }^\circ\text{C}$ $V_{GS} = 0\text{ V}, V_{DS} = 400\text{ V}, T_J = +125\text{ }^\circ\text{C}$	2N6796 2N6798 2N6800 2N6802 I_{DSS2}		0.25	mA
Static Drain-Source On-State Resistance $V_{GS} = 10\text{ V}, I_D = 5.0\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 3.5\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 2.0\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 1.5\text{ A pulsed}$	2N6796 2N6798 2N6800 2N6802 $r_{DS(on)1}$		0.18 0.40 1.00 1.50	Ω
Static Drain-Source On-State Resistance $V_{GS} = 10\text{ V}, I_D = 8.0\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 5.5\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 3.0\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 2.5\text{ A pulsed}$	2N6796 2N6798 2N6800 2N6802 $r_{DS(on)2}$		0.195 0.420 1.100 1.600	Ω
Static Drain-Source On-State Resistance $T_J = +125\text{ }^\circ\text{C}$ $V_{GS} = 10\text{ V}, I_D = 5.0\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 3.5\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 2.0\text{ A pulsed}$ $V_{GS} = 10\text{ V}, I_D = 1.5\text{ A pulsed}$	2N6796 2N6798 2N6800 2N6802 $r_{DS(on)3}$		0.35 0.75 2.40 3.50	Ω
Diode Forward Voltage $V_{GS} = 0\text{ V}, I_D = 8.0\text{ A pulsed}$ $V_{GS} = 0\text{ V}, I_D = 5.5\text{ A pulsed}$ $V_{GS} = 0\text{ V}, I_D = 3.0\text{ A pulsed}$ $V_{GS} = 0\text{ V}, I_D = 2.5\text{ A pulsed}$	2N6796 2N6798 2N6800 2N6802 V_{SD}		1.5 1.4 1.4 1.4	V

ELECTRICAL CHARACTERISTICS @ $T_A = +25\text{ }^\circ\text{C}$, unless otherwise noted (continued)
DYNAMIC CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Gate Charge:				
On-State Gate Charge				
$V_{GS} = 10\text{ V}, I_D = 8.0\text{ A}, V_{DS} = 50\text{ V}$ 2N6796	$Q_{g(on)}$		28.51	nC
$V_{GS} = 10\text{ V}, I_D = 5.5\text{ A}, V_{DS} = 50\text{ V}$ 2N6798		42.07		
$V_{GS} = 10\text{ V}, I_D = 3.0\text{ A}, V_{DS} = 50\text{ V}$ 2N6800		34.75		
$V_{GS} = 10\text{ V}, I_D = 2.5\text{ A}, V_{DS} = 50\text{ V}$ 2N6802		33.00		
Gate to Source Charge				
$V_{GS} = 10\text{ V}, I_D = 8.0\text{ A}, V_{DS} = 50\text{ V}$ 2N6796	Q_{gs}		6.34	nC
$V_{GS} = 10\text{ V}, I_D = 5.5\text{ A}, V_{DS} = 50\text{ V}$ 2N6798		5.29		
$V_{GS} = 10\text{ V}, I_D = 3.0\text{ A}, V_{DS} = 50\text{ V}$ 2N6800		5.75		
$V_{GS} = 10\text{ V}, I_D = 2.5\text{ A}, V_{DS} = 50\text{ V}$ 2N6802		4.46		
Gate to Drain Charge				
$V_{GS} = 10\text{ V}, I_D = 8.0\text{ A}, V_{DS} = 50\text{ V}$ 2N6796	Q_{gd}		16.59	nC
$V_{GS} = 10\text{ V}, I_D = 5.5\text{ A}, V_{DS} = 50\text{ V}$ 2N6798		28.11		
$V_{GS} = 10\text{ V}, I_D = 3.0\text{ A}, V_{DS} = 50\text{ V}$ 2N6800		16.59		
$V_{GS} = 10\text{ V}, I_D = 2.5\text{ A}, V_{DS} = 50\text{ V}$ 2N6802		28.11		

SWITCHING CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Turn-on delay time				
$I_D = 8.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 30\text{ V}$ 2N6796	$t_{d(on)}$		30	ns
$I_D = 5.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 77\text{ V}$ 2N6798				
$I_D = 3.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 176\text{ V}$ 2N6800				
$I_D = 2.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 225\text{ V}$ 2N6802				
Rinse time				
$I_D = 8.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 30\text{ V}$ 2N6796	t_r		75	ns
$I_D = 5.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 77\text{ V}$ 2N6798		50		
$I_D = 3.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 176\text{ V}$ 2N6800		35		
$I_D = 2.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 225\text{ V}$ 2N6802		30		
Turn-off delay time				
$I_D = 8.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 30\text{ V}$ 2N6796	$t_{d(off)}$		40	ns
$I_D = 5.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 77\text{ V}$ 2N6798		50		
$I_D = 3.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 176\text{ V}$ 2N6800		55		
$I_D = 2.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 225\text{ V}$ 2N6802		55		
Fall time				
$I_D = 8.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 30\text{ V}$ 2N6796	t_f		45	ns
$I_D = 5.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 77\text{ V}$ 2N6798		40		
$I_D = 3.0\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 176\text{ V}$ 2N6800		35		
$I_D = 2.5\text{ A}, V_{GS} = +10\text{ V}, R_G = 7.5\text{ }\Omega, V_{DD} = 225\text{ V}$ 2N6802		30		
Diode Reverse Recovery Time				
$di/dt \leq 100\text{ A}/\mu\text{s}, V_{DD} \leq 50\text{ V}, I_F = 8.0\text{ A}$ 2N6796	t_{rr}		300	ns
$di/dt \leq 100\text{ A}/\mu\text{s}, V_{DD} \leq 50\text{ V}, I_F = 5.5\text{ A}$ 2N6798		500		
$di/dt \leq 100\text{ A}/\mu\text{s}, V_{DD} \leq 50\text{ V}, I_F = 3.0\text{ A}$ 2N6800		700		
$di/dt \leq 100\text{ A}/\mu\text{s}, V_{DD} \leq 50\text{ V}, I_F = 2.5\text{ A}$ 2N6802		900		

GRAPHS







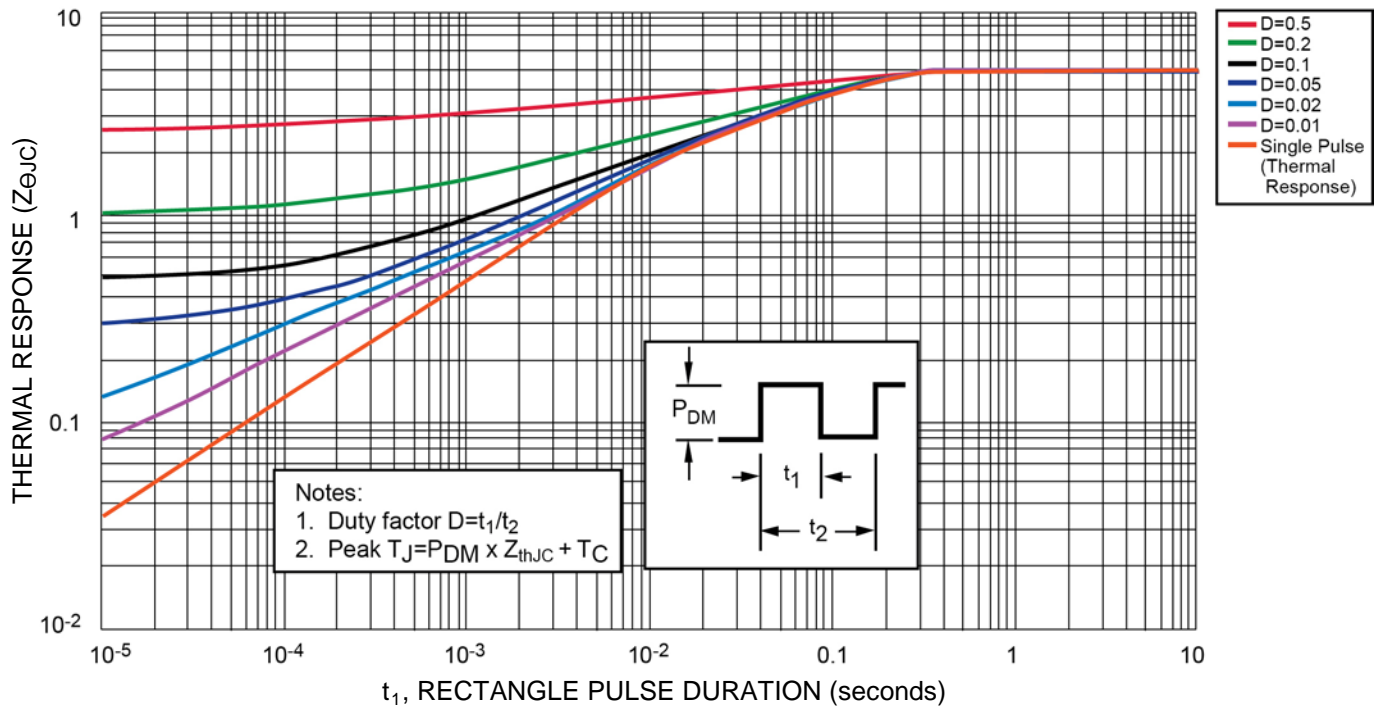




FIGURE 1 – Normalized Transient Thermal Impedance

GRAPHS (continued)
FIGURE 2 – Maximum Drain Current versus Case Temperature Graphs


GRAPHS (continued)

FIGURE 3 – Maximum Safe Operating Area

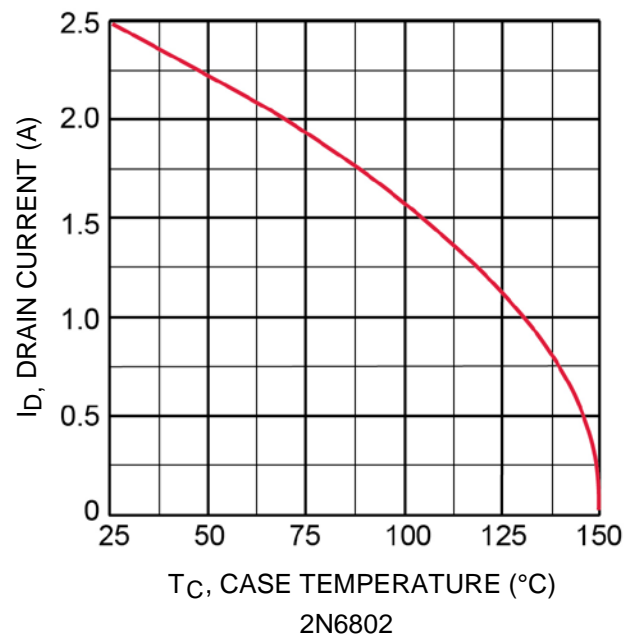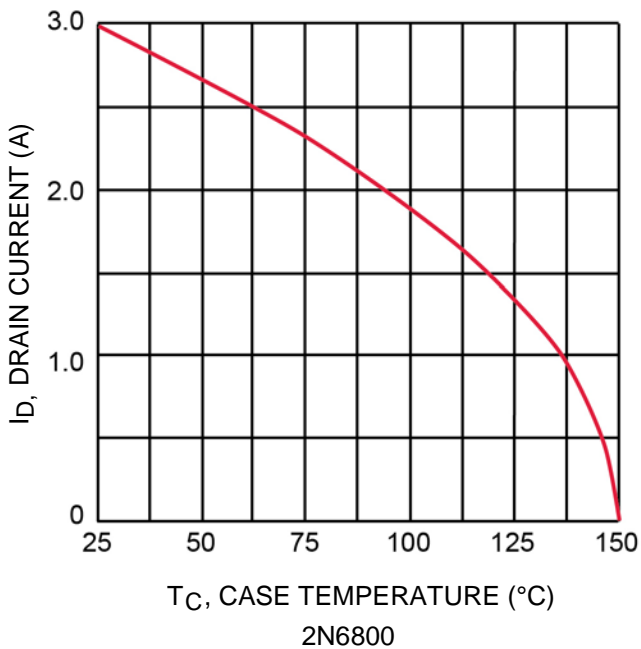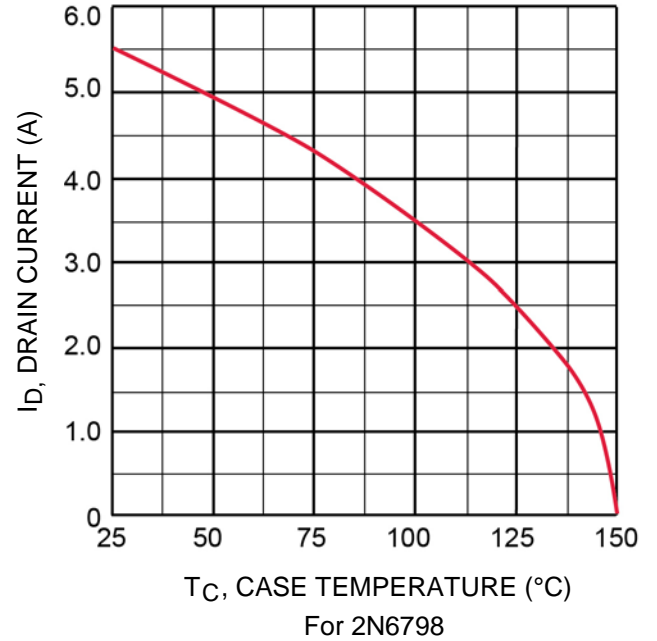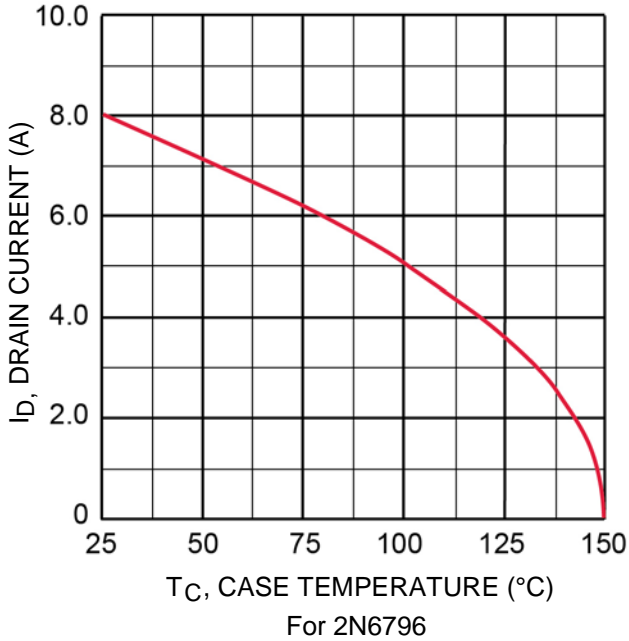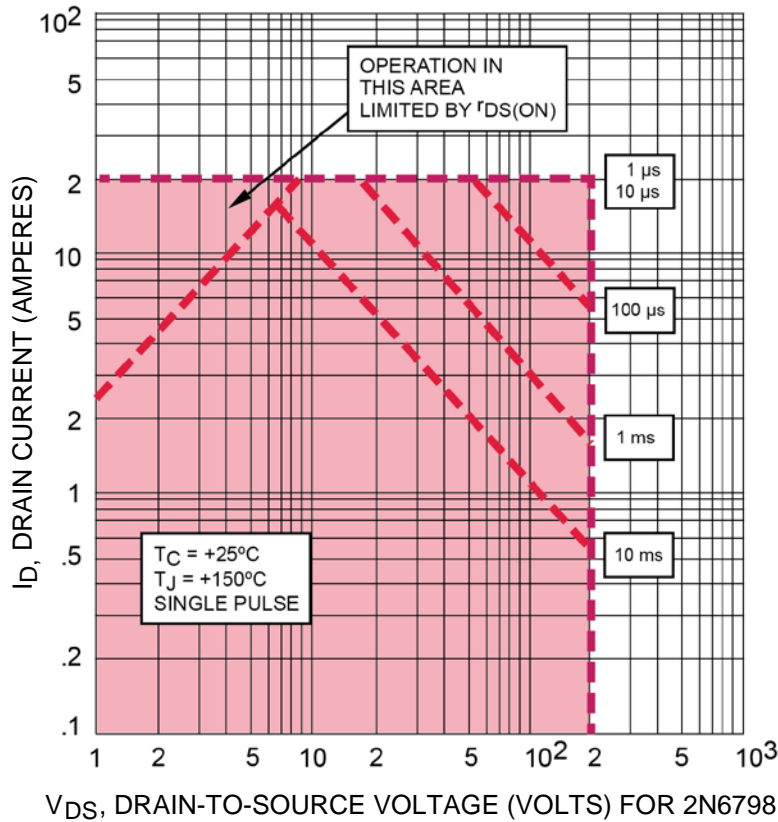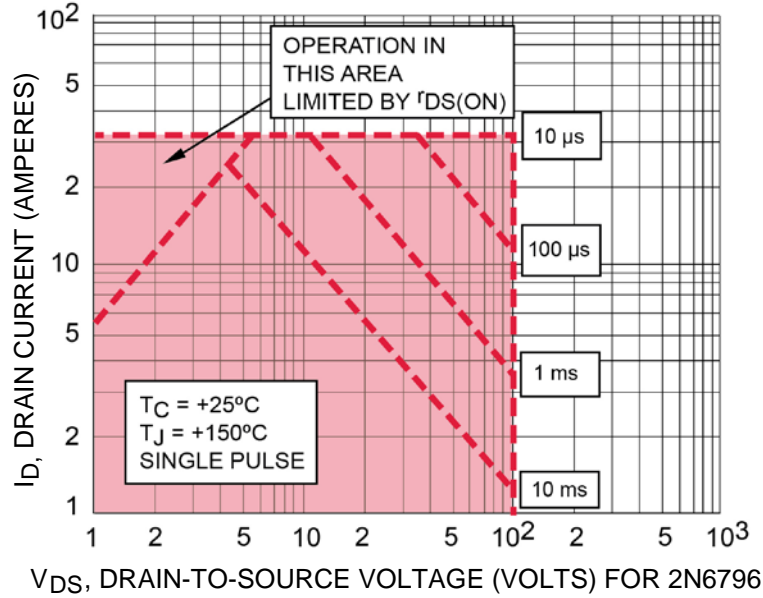

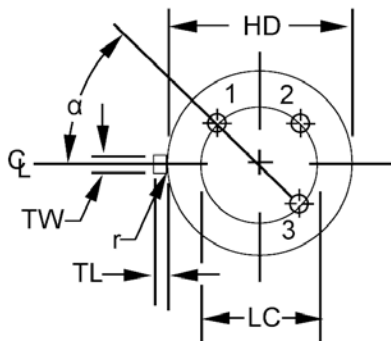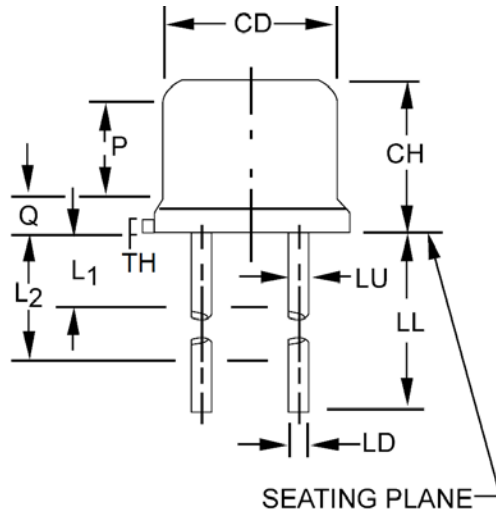PACKAGE DIMENSIONS


Symbol	Dimensions				Note
	Inch		Millimeters		
	Min	Max	Min	Max	
CD	0.305	0.355	7.75	9.02	
CH	0.160	.180	4.07	4.57	
HD	0.335	0.370	8.51	9.39	
LC	0.200 TP		5.08 TP		6
LD	0.016	0.021	0.41	0.53	7, 8
LL	0.500	0.750	12.70	19.05	7, 8
LU	0.016	0.019	0.41	0.48	7, 8
L1		0.050		1.27	7, 8
L2	0.250		6.35		7, 8
P	.070		1.78		5
Q		0.050		1.27	4
TL	0.029	0.045	0.74	1.14	3
TW	0.028	0.034	0.72	0.86	2
TH	.009	.041	0.23	1.04	
r		0.010		0.25	9
α	45° TP		45° TP		6

NOTES:

- Dimensions are in inches. Millimeters are given for general information only.
- Beyond radius (r) maximum, j shall be held for a minimum length of .011 (0.028 mm).
- Dimension TL measured from maximum HD.
- Outline in this zone is not controlled.
- Dimension CD shall not vary more than .010 (0.25 mm) in zone P. This zone is controlled for automatic handling.
- Leads at gauge plane .054 +.001, -.000 (1.37 +0.03, -0.00 mm) below seating plane shall be within .007 (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
- LU applies between L1 and L2. LD applies between L2 and L minimum. Diameter is uncontrolled in L1 and beyond LL minimum.
- All three leads.
- Radius (r) applies to both inside corners of tab.
- Drain is electrically connected to the case.
- In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.