

# CENB1080

Universal Input 80 Watt Series



ITE Switch-Mode Power Supply

3 Year Warranty

- 100-240VAC Universal Input
- Meets EISA2007, CEC Efficiency Level V, EU (EC) No 278/2009 Phase II
- Desktop Style
- 12V to 48V Single Output Models, up to 80W
- Modified and Custom Designs Available
- Regulated Output with Low Ripple
- Impact-Resistant Polycarbonate Enclosure
- No Load Power Consumption <0.5W
- Certified to UL/EN/IEC60950-1, 2<sup>nd</sup> Edition



## Specifications

All Specifications are typical at nominal input, full load at 25°C unless otherwise stated.

AC Input	100-240Vac, +/-10%, 47-63 Hz, 1Ø	MTBF	>100,000 hours calculated
Input Current	100Vac: 1.5A	Hold-up Time	18 ms min. @ 115Vac, 60 ms min. @ 230 Vac
Inrush Current	60A peak @ 264Vac, cold start	Overload Protection	Hiccup Mode
Input Fuse	3.15A, 250V Internal Primary Current Fuse provided	Short Circuit Protection	Hiccup Mode
Efficiency	Meets International Efficiency Level V	Topology	Switching – Fixed Frequency Flyback
Output Voltage	See chart	Safety and EMC Approvals	EN/IEC/CSA/UL60950-1, 2 <sup>nd</sup> Edition EMC: See chart
Output Power	See chart	Dielectric Withstand	Input-Output: 4,242Vdc Input-GND: 1,500 Vac, Output-GND: 500Vdc
Ripple and Noise	1% pk-pk max., 20MHz BW	Operating Temperature	0° to 40°C, no derating
Line/Load Regulation	Line: +/- 1 to 2%, Load: +/-5% at end of cable	Storage Temperature	-30 to +85°C
Transient Response	500µs max., 50% load step, typical	Relative Humidity	5% to 95%, non-condensing
Minimum Load	Not required	Altitude	0 to 10,000 ft
Case Material	Black 94V0 Polycarbonate	Output Connections	Cable: See outline drawing Connector: Ault #3, 2.5mm barrel or #51, 6-pin Molex (12V model)
Case Dimensions	131 x 72 x 43mm. See outline drawing	Weight	500g

## EMI/EMC Compliance

Conducted Emissions	FCC Part 15, Class B, EN55022 Class B, EN55024
Radiated Emissions	FCC Part 15, Class B, EN55022 Class B, EN55024
Voltage Fluctuations	EN61000-3-3, Line Flicker
Static Discharge Immunity	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3, 3V/m.
EFT/Burst Immunity	EN61000-4-4, 2kV/5kHz.
Line Surge Immunity	EN61000-4-5, 1kV differential, 2kV common-mode
Conducted RF Immunity	EN61000-4-6, 3Vrms
Power Frequency Magnetic Field Immunity	EN61000-4-8, 3A/m
Voltage Dip Immunity	EN61000-4-11 crit. A, 100Vac 60Hz, 40%/5 cycles with 70% full load.
Line Frequency Harmonics	EN61000-3-2, Class A

# CENB1080

Universal Input 80 Watt Series

ITE Switch-Mode Power Supply


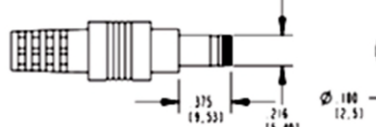
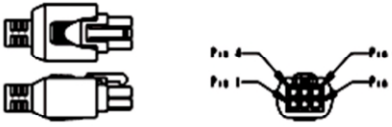
3 Year Warranty

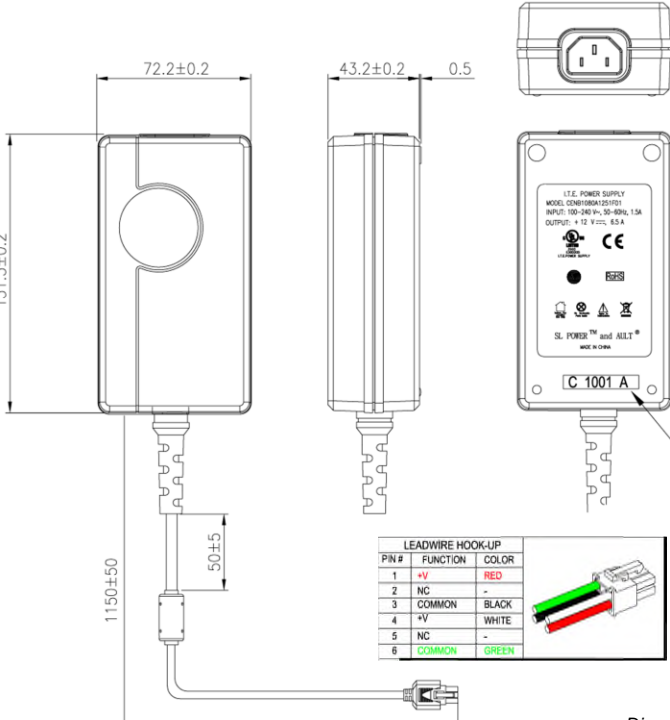
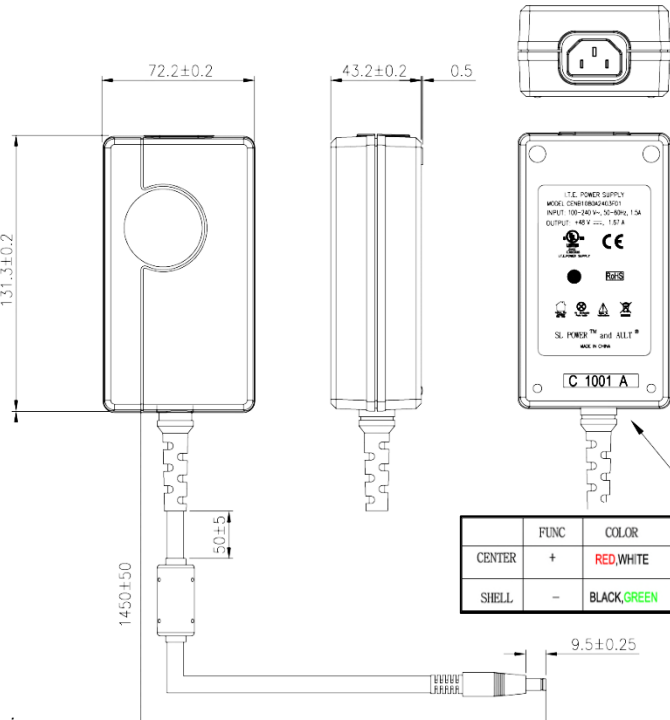
Model Number	Volts (V)	Output Current (max)	Max Watts	Ripple (Vp-p max)
CENB1080A1251F01	12 V	6.5 A	78.0 W	120mV
CENB1080A1503F01	15 V	5.2 A	78.0 W	150mV
CENB1080A1803F01	18 V	4.33 A	78.0 W	180mV
CENB1080A2403F01	24 V	3.25 A	78.0 W	240mV
CENB1080A4803F01	48 V	1.65 A	79.2 W	480mV

## Model Number Key

**CENB 1 080 A VV 03 F 01**

<b>Model</b>	"01" = Standard. "02" and higher indicates a modified model.
<b>Input Connector:</b>	"F" = IEC320 C14 grounded, Other options available, see next page.
<b>Output Connector:</b>	"03" = Ault #3, 2.5mm barrel connector or #51, 6-pin Molex. Other options available,
<b>Output Voltage:</b>	"12" = 12Vdc, "15" = 15Vdc, "18" = 18Vdc, "24" = 24V dc, "48" = 48Vdc
<b>Model</b>	"A" = Original Configuration
<b>Output Power:</b>	"080" = 80 Watts
<b># of Outputs</b>	"1" = Single Output
<b>Product Family:</b>	"C" = Commercial/ITE/Industrial, "E" = External, "NB" = Model Series Designator

Input Receptacle	Output Connector	Output Connector (12V Model)
 <p>IEC320 C14 - Class I Grounded (F)</p>	<p>3</p>  <p>"#3" Connector is 2.5mm barrel type, center (+)</p>	<p>51</p>  <p>"#51" Connector is Molex 39-01-2060 or equivalent.</p>

12V Model Outline Drawing	15V-48V Model Outline Drawing																					
																						
<p>Dimensions are in mm</p>																						
<table border="1"> <thead> <tr> <th>LEADWIRE HOOK-UP</th> <th>FUNC</th> <th>COLOR</th> </tr> </thead> <tbody> <tr> <td>PIN # 1</td> <td>+V</td> <td>RED</td> </tr> <tr> <td>PIN # 2</td> <td>NC</td> <td>-</td> </tr> <tr> <td>PIN # 3</td> <td>COMMON</td> <td>BLACK</td> </tr> <tr> <td>PIN # 4</td> <td>+V</td> <td>WHITE</td> </tr> <tr> <td>PIN # 5</td> <td>NC</td> <td>-</td> </tr> <tr> <td>PIN # 6</td> <td>COMMON</td> <td>GREEN</td> </tr> </tbody> </table>		LEADWIRE HOOK-UP	FUNC	COLOR	PIN # 1	+V	RED	PIN # 2	NC	-	PIN # 3	COMMON	BLACK	PIN # 4	+V	WHITE	PIN # 5	NC	-	PIN # 6	COMMON	GREEN
LEADWIRE HOOK-UP	FUNC	COLOR																				
PIN # 1	+V	RED																				
PIN # 2	NC	-																				
PIN # 3	COMMON	BLACK																				
PIN # 4	+V	WHITE																				
PIN # 5	NC	-																				
PIN # 6	COMMON	GREEN																				

Data Sheet © 2015 SL Power Electronics Corp. The information and specifications contained herein are believed to be correct at the time of publication. Rev. 8-10-2015  
 However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.