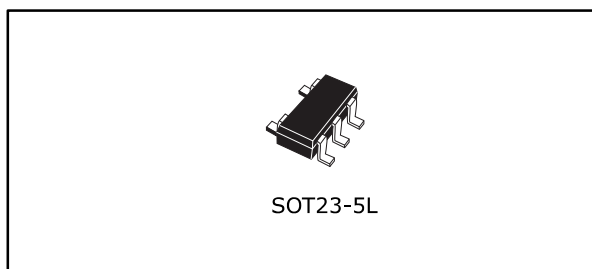

150 mA, ultra low quiescent current linear voltage regulator

Datasheet - production data

**Features**

- Input voltage from 1.5 to 5.5 V
- Very low quiescent current:
 - 1.0 μA (typ.) at no load
 - 1.4 μA (typ.) at 150 mA load
 - 1 nA (typ.) in OFF mode
 - 200 nA max. in OFF mode at 125 °C
- Output voltage tolerance: $\pm 2\%$ at 25 °C
- 150 mA guaranteed output current
- Wide range of output voltages: 0.8 V to 3.3 V in 100 mV steps
- Logic-controlled electronic shutdown
- Compatible with ceramic capacitor ($C_{\text{OUT}} = 1 \mu\text{F}$)
- Internal current and thermal limit
- Temperature range: from -40 °C to 125 °C

Application

- Mobile phones
- Digital still cameras (DSC)
- Battery-powered equipment
- Portable media players

Description


The STLQ015 provides 150 mA of maximum current with an input voltage range from 1.5 V to 5.5 V and a typical dropout voltage of 112 mV. The key feature of this device is its quiescent current, which is just 1.4 μA at maximum output current. The device is stable with a ceramic capacitor on the output. It offers very low quiescent current and extends battery-life of applications requiring very long standby time. The enable logic control function puts the STLQ015 in shutdown mode, reducing total current consumption to 1 nA. The device also includes short-circuit constant-current limiting and thermal protection. Typical applications are: portable and battery-powered systems, electronic sensors and microcontroller power supply.

Contents

| | | |
|----------|--|-----------|
| 1 | Block diagram..... | 3 |
| 2 | Pin configuration and description..... | 4 |
| 3 | Typical application | 5 |
| 4 | Maximum ratings | 6 |
| 5 | Electrical characteristics | 7 |
| 6 | Typical performance characteristics | 9 |
| 7 | Package information | 12 |
| | 7.1 SOT23-5L package information | 12 |
| | 7.2 SOT23-5L packing information..... | 14 |
| 8 | Ordering information..... | 15 |
| 9 | Revision history | 16 |

1 Block diagram

Figure 1: Device block diagram

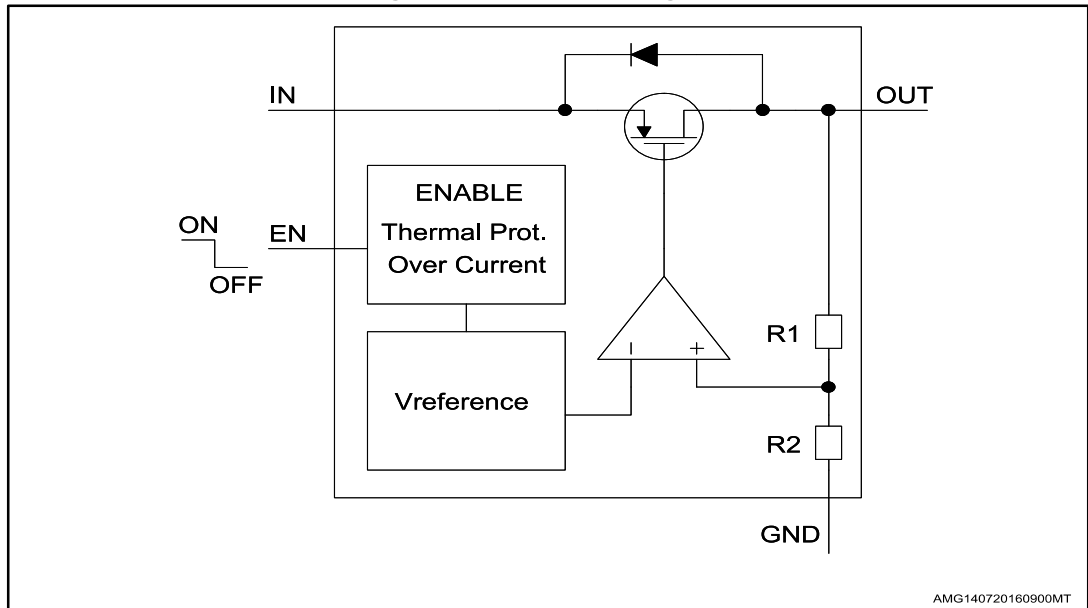

2 Pin configuration and description

Figure 2: Pin configuration (top view)


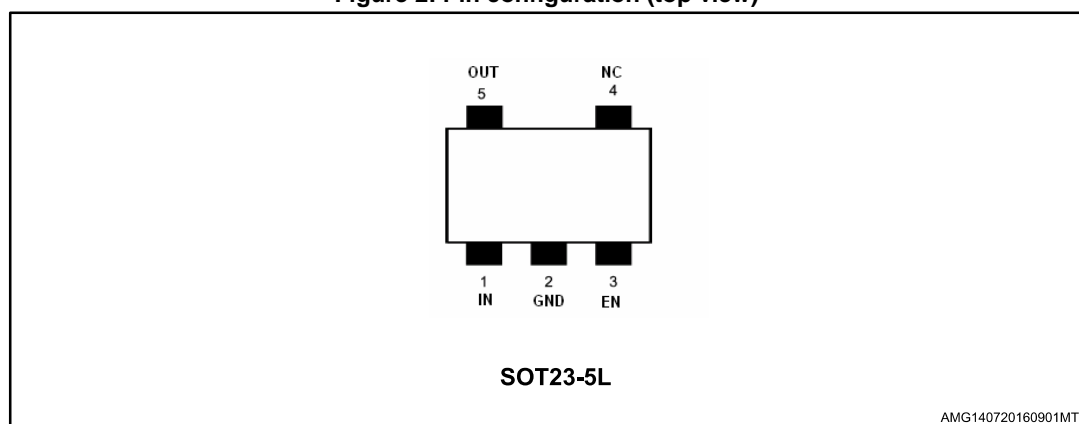


Table 1: Pin description

| Pin | Symbol | Functions |
|-----|--------|--|
| 3 | EN | Enable input Set V_{EN} = high to turn on the device Set V_{EN} = low to turn off the device |
| 2 | GND | Ground |
| 1 | IN | Input voltage |
| 5 | OUT | Output voltage |
| 4 | NC | Not connected |

3 Typical application

Figure 3: Typical application circuit

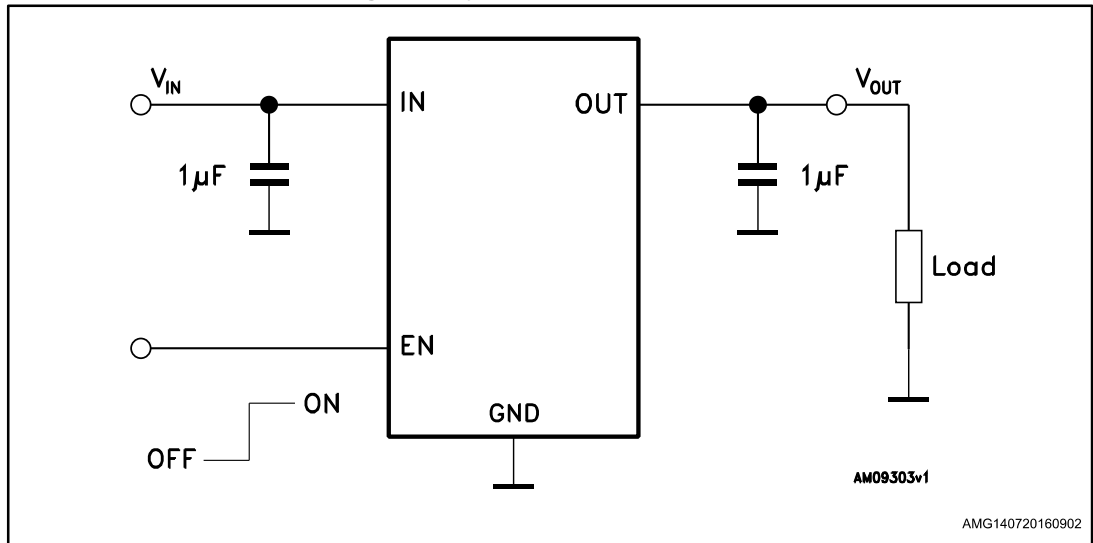

4 Maximum ratings

Table 2: Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|------------------|---------------------------|------------------------------|------|
| V _{IN} | DC input voltage | -0.3 to 7 | V |
| V _{OUT} | DC output voltage | -0.3 to V _{IN} +0.3 | V |
| V _{EN} | Enable input voltage | -0.3 to V _{IN} +0.3 | V |
| I _{OUT} | Output current | Internally limited | mA |
| ESD | Human body model | ±3 | kV |
| | Machine model | ±300 | V |
| P _D | Power dissipation | Internally limited | mW |
| T _{STG} | Storage temperature range | -65 to 150 | °C |
| T _{OP} | Max. junction temperature | 150 | °C |



Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.

Table 3: Thermal data

| Symbol | Parameter | Value | Unit |
|-------------------|-------------------------------------|-------|------|
| R _{thJA} | Thermal resistance junction-ambient | 255 | °C/W |
| R _{thJC} | Thermal resistance junction-case | 81 | °C/W |

5 Electrical characteristics

$T_J = 25\text{ °C}$, $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$, $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$, $I_{OUT} = 1\text{ mA}$, $V_{EN} = V_{IN}$, unless otherwise specified.

Table 4: Electrical characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|--|---|------|-------------|------|---------------------|
| V_{IN} | Operating input voltage | $I_{OUT} = 0$ | 1.5 | | 5.5 | V |
| | | $-40\text{ °C} < T_J < 125\text{ °C}$, $I_{OUT} = 150\text{ mA}$ | 1.55 | | 5.5 | |
| V_{OUT} | V_{OUT} accuracy | $I_{OUT} = 1\text{ mA}$ | -2 | | 2 | % |
| | | $I_{OUT} = 1\text{ mA}$, $V_{OUT} < 1\text{ V}$ | -20 | | +20 | mV |
| | | $I_{OUT} = 1\text{ mA}$, $-40\text{ °C} < T_J < 125\text{ °C}$ | -3 | | 3 | % |
| $\Delta V_{OUT-LINE}$ | Static line regulation | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 5.5\text{ V}$, $I_{OUT} = 1\text{ mA}$ | | ± 0.01 | | %/V |
| $\Delta V_{OUT-LOAD}$ | Static load regulation | $I_{OUT} = 1\text{ mA to } 150\text{ mA}$ | | ± 0.002 | | %/mA |
| V_{DROP} | Dropout voltage ⁽¹⁾ | $I_{OUT} = 150\text{ mA}$ | | 112 | | mV |
| | | $I_{OUT} = 150\text{ mA}$, $-40\text{ °C} < T_J < 125\text{ °C}$ | | | 300 | |
| e_n | Output noise voltage | 10 kHz to 100 kHz, $I_{OUT} = 10\text{ mA}$, $V_{OUT} = 0.8\text{ V}$ | | 75 | | μV_{RMS} |
| SVR | Supply voltage rejection $V_{OUT} = 0.8\text{ V}$ | $V_{IN} = V_{OUTNOM} + 1\text{ V} \pm V_{RIPPLE}$ $V_{RIPPLE} = 0.1\text{ V}$, frequency = 1 kHz $I_{OUT} = 10\text{ mA}$ | | 40 | | dB |
| | | $V_{IN} = V_{OUTNOM} + 1\text{ V} \pm V_{RIPPLE}$ $V_{RIPPLE} = 0.1\text{ V}$, frequency = 10 kHz $I_{OUT} = 1\text{ mA}$ | | 30 | | |
| | | $V_{IN} = V_{OUTNOM} + 1\text{ V} \pm V_{RIPPLE}$ $V_{RIPPLE} = 0.1\text{ V}$, frequency = 100 kHz $I_{OUT} = 1\text{ mA}$ | | 15 | | |
| I_q | Quiescent current | $I_{OUT} = 0$ | | 1.0 | 1.7 | μA |
| | | $I_{OUT} = 0\text{ to } 150\text{ mA}$, $-40\text{ °C} < T_J < 125\text{ °C}$ | | 1.4 | 2.4 | |
| I_{OFF} | Shutdown current ⁽²⁾ | V_{IN} input current in OFF mode: $V_{EN} = \text{GND}$, $-40\text{ °C} < T_J < 125\text{ °C}$ | | 1 | 200 | nA |
| I_{SC} | Short-circuit current | $R_L = 0$ | 250 | 350 | | mA |
| V_{EN} | Enable input logic low | $V_{IN} = 1.5\text{ V to } 5.5\text{ V}$ | | | 0.4 | V |
| | Enable input logic high | $V_{IN} = 1.5\text{ V to } 5.5\text{ V}$ | 0.7 | | | V |

Electrical characteristics

STLQ015

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|------------|-----------------------------|---|-------|------|------|--------------------|
| I_{EN} | Enable pin input current | $V_{EN} = 5.5 \text{ V}$ | | 1 | 200 | nA |
| T_{ON} | Turn-on time ⁽³⁾ | $V_{OUT} = 0.8 \text{ V}$, $I_{OUT} = 150 \text{ mA}$ | | 160 | | μs |
| T_{SHDN} | Thermal shutdown | | | 170 | | $^{\circ}\text{C}$ |
| | Hysteresis | | | 15 | | |
| C_{OUT} | Output capacitor | Capacitance (see typical performance characteristics for stability) | 0.47 | | 10 | μF |
| | ESR | | 0.056 | | 6 | Ω |





Notes:

⁽¹⁾Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value. This specification does not apply to output voltages below 1.5 V.

⁽²⁾During shutdown and at no load, P-channel leakage current flowing through the internal resistor divider causes the V_{OUT} rise.

⁽³⁾Turn-on time is the time measured between the enable input just exceeding V_{EN} high value and the output voltage just reaching 95% of its nominal value.

6 Typical performance characteristics

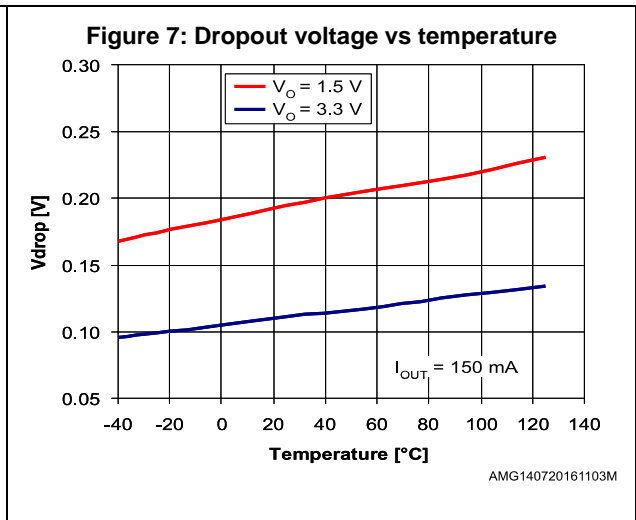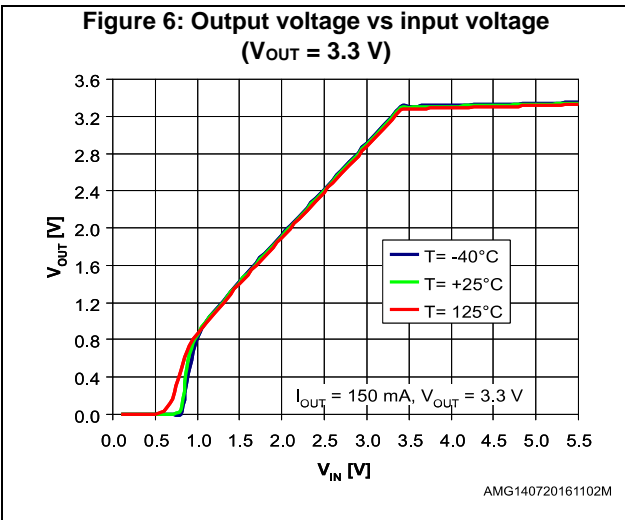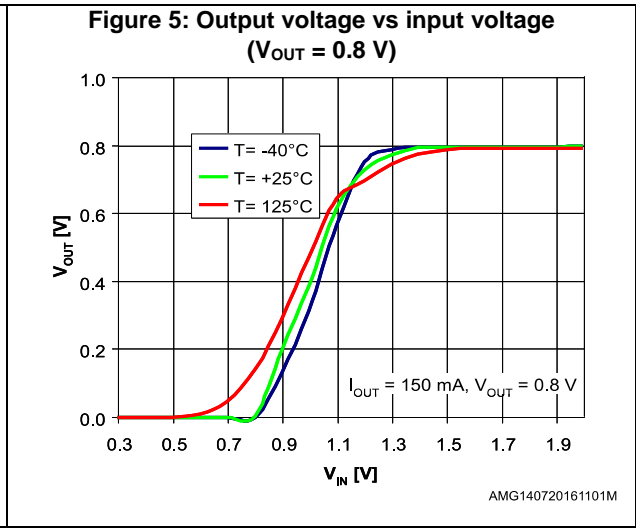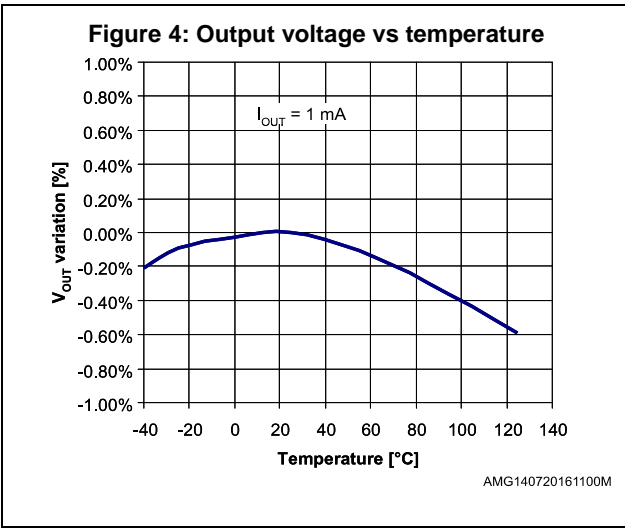








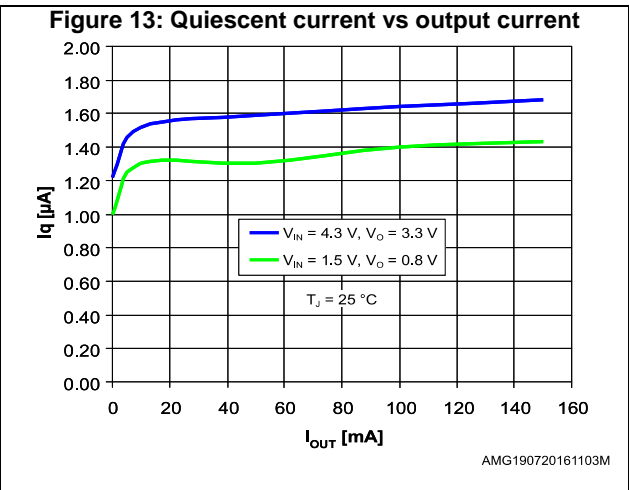


Figure 14: Output noise voltage vs frequency

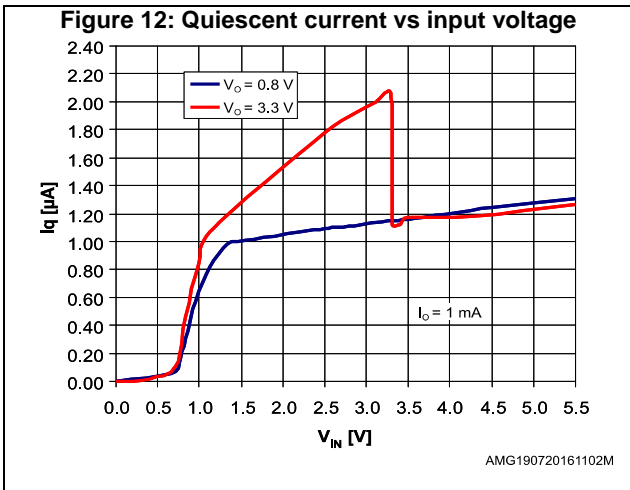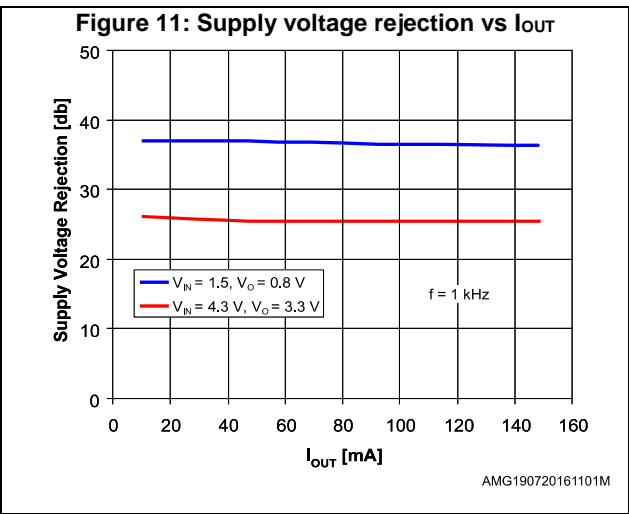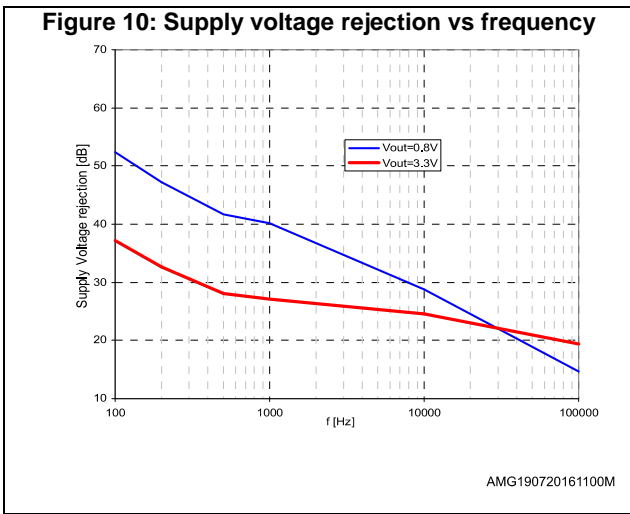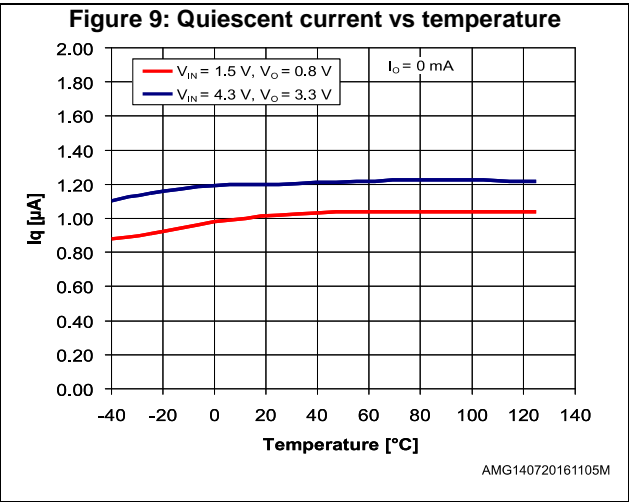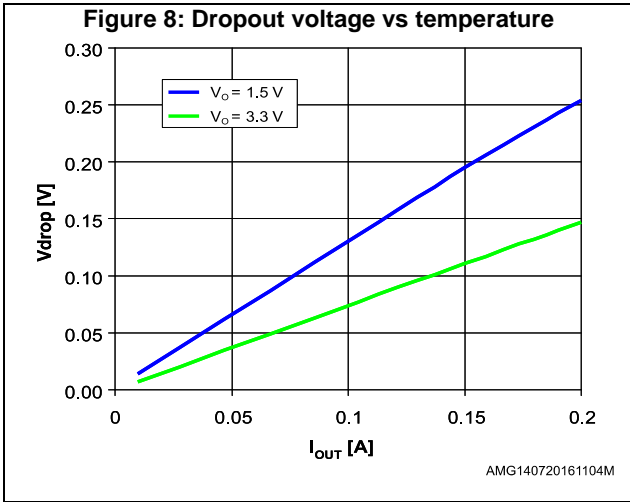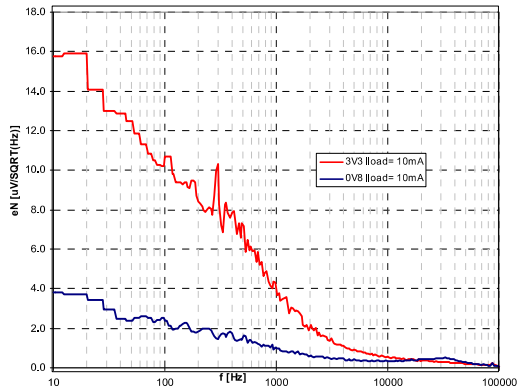


AMG190720161104M

Figure 15: C_{OUT} stability region

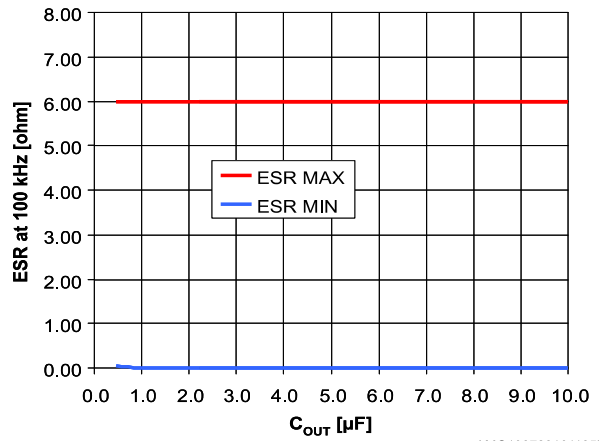

AMG190720161105M


Figure 16: Start-up transient

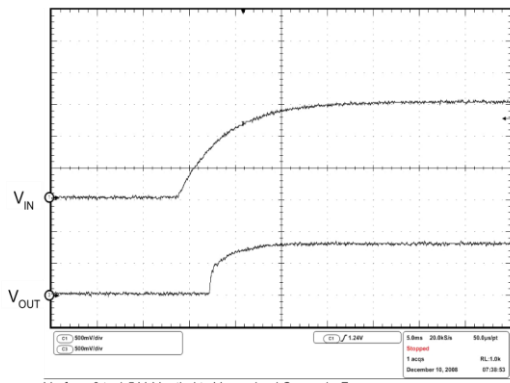

V_{IN} from 0 to 1.5 V, V_{EN} tied to V_{IN}, no load C_{OUT} = 1 μF

AMG190720161106M

Figure 17: Enable transient

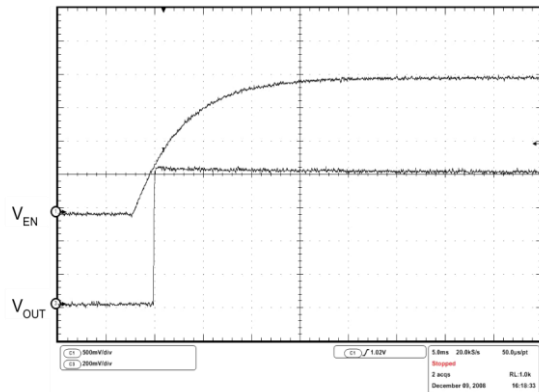

V_{IN} = 1.5 V; V_{EN} from 0 to 2 V, no load, T = 25 °C

AMG190720161107M

7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

7.1 SOT23-5L package information

Figure 18: SOT23-5L package outline


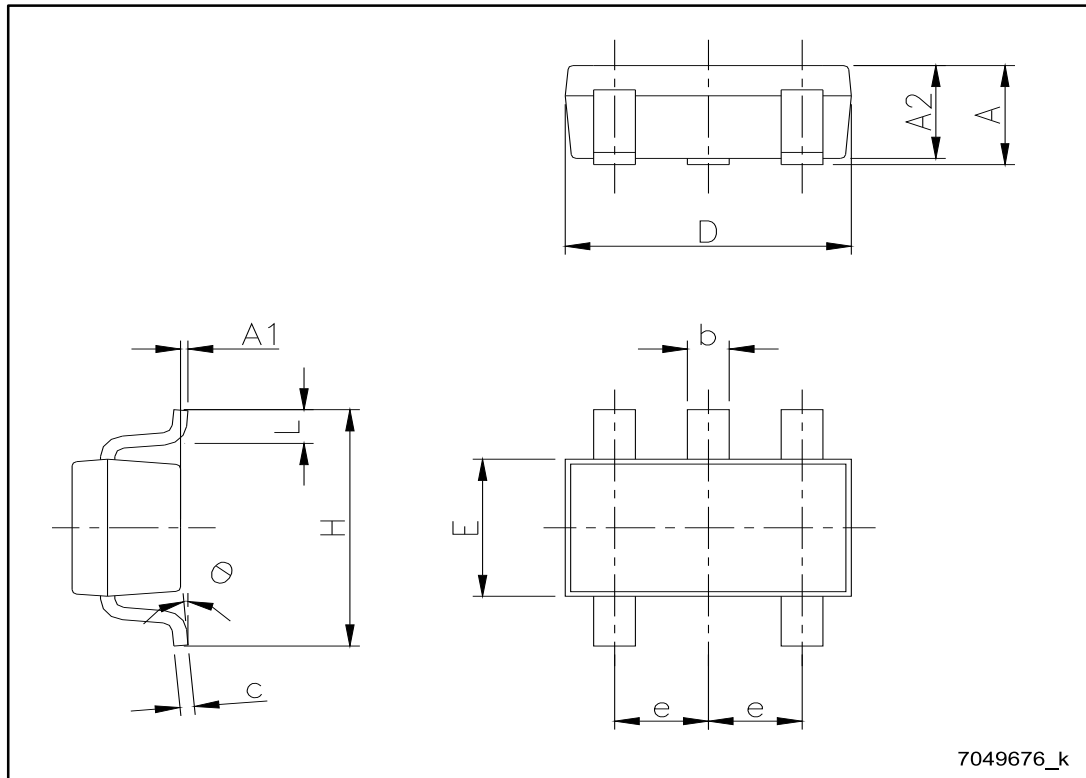


Table 5: SOT23-5L package mechanical data

| Dim. | mm | | |
|----------|------|------|------|
| | Min. | Typ. | Max. |
| A | 0.90 | | 1.45 |
| A1 | 0 | | 0.15 |
| A2 | 0.90 | | 1.30 |
| b | 0.30 | | 0.50 |
| c | 0.09 | | 0.20 |
| D | | 2.95 | |
| E | | 1.60 | |
| e | | 0.95 | |
| H | | 2.80 | |
| L | 0.30 | | 0.60 |
| θ | 0° | | 8° |

Figure 19: SOT23-5L recommended footprint

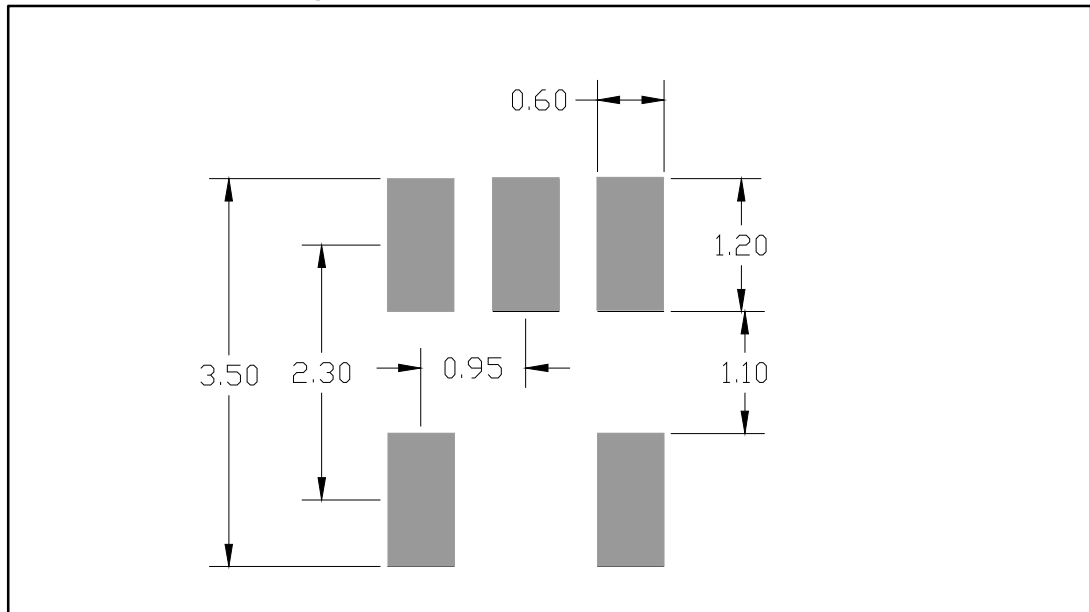

Dimensions are in mm

7.2 SOT23-5L packing information

Figure 20: SOT23-5L tape and reel outline

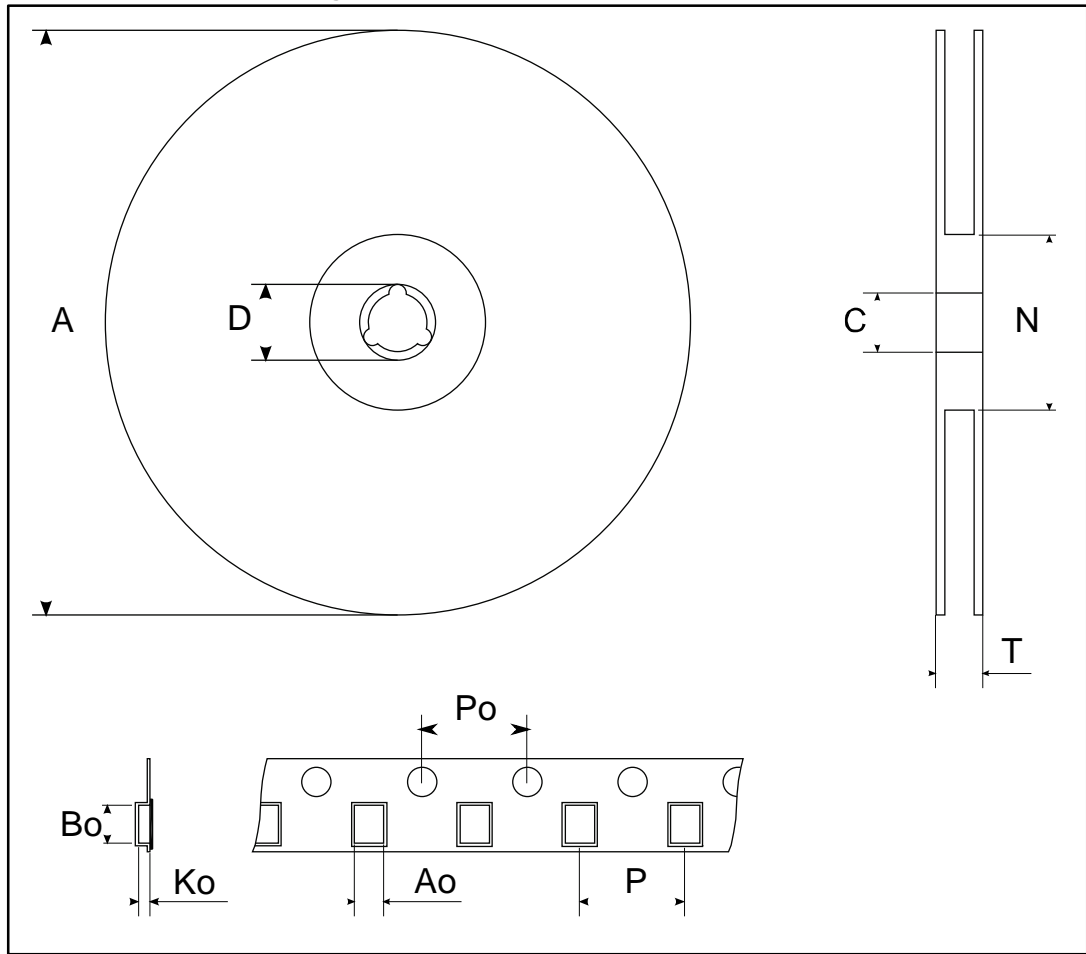


Table 6: SOT23-5L tape and reel mechanical data

| Dim. | mm | | |
|------|------|------|------|
| | Min. | Typ. | Max. |
| A | | | 180 |
| C | 12.8 | 13.0 | 13.2 |
| D | 20.2 | | |
| N | 60 | | |
| T | | | 14.4 |
| Ao | 3.13 | 3.23 | 3.33 |
| Bo | 3.07 | 3.17 | 3.27 |
| Ko | 1.27 | 1.37 | 1.47 |
| Po | 3.9 | 4.0 | 4.1 |
| P | 3.9 | 4.0 | 4.1 |

8 Ordering information

Table 7: Order code

| Order code | Output voltage | Package | Marking |
|-------------|----------------|----------|---------|
| STLQ015M12R | 1.2 V | SOT23-5L | 1512 |
| STLQ015M15R | 1.5 V | | 1515 |
| STLQ015M18R | 1.8 V | | 1518 |
| STLQ015M21R | 2.1 V | | 1521 |
| STLQ015M25R | 2.5 V | | 1525 |
| STLQ015M28R | 2.8 V | | 1528 |
| STLQ015M30R | 3.0 V | | 1530 |
| STLQ015M31R | 3.1 V | | 1531 |
| STLQ015M33R | 3.3 V | | 1533 |

9 Revision history

Table 8: Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 23-Mar-2010 | 1 | Initial release. |
| 20-Jan-2011 | 2 | Modified: Table 5 on page 13 and Figure 18. Added: Figure 19. |
| 11-Sep-2012 | 3 | Added: new order codes STLQ015XG12R, STLQ015XG15R and STLQ015XG18R to the device summary table. |
| 17-Feb-2014 | 4 | Changed the part number STLQ015xx to STLQ015. Changed the title in cover page. Updated Description and Table : in cover page. Changed typ. value of I _Q parameter in Table 4: Electrical characteristics. Minor text changes. |
| 03-Jul-2015 | 5 | Added package SOT23-5L. Updated <i>Table 1.: Pin description</i> , <i>Table 3.: Thermal data</i> and <i>Figure 2.: Pin configuration (top view)</i> Updated 8: <i>Order code</i> . Updated <i>Section 7: Package information</i> . Minor text changes. |
| 02-Sep-2016 | 6 | Updated Section 8: "Ordering information" . Minor text changes. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved