


Metal thin film chip resistors (Ultra-precision)

■ RG series (This series now includes the former RGH series.) AEC-Q200 Compliant

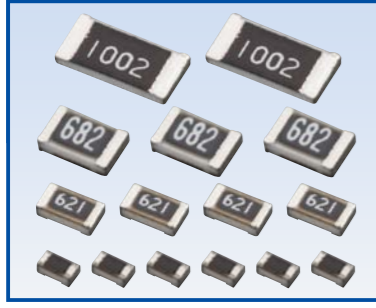

Features

- Ultimate chip resistors: the result of all of our thin film technology expertise including inorganic passivation
- Resistance drift: less than +/-0.1% after 10000 hour accelerated reliability test
- +/-0.02% of resistance tolerance and +/-5ppm/°C of temperature coefficient of resistance
- Excellent tolerance to power surges


Applications

- Any applications that require precision resistors such as automotive electronics, industrial test and measurement equipment, and consumer electronics

Specifications

*Standard stock item: E-24 series with TOR P, Q, and R grades, as well as tolerance D and B grades. Other E-24 grades and E-96 series are made to order

Dimensions



| Dimension (inch) | RG1005 (0402) OLD:RGH1005-2B included | RG1608 (0603) OLD:RGH1608-2C included | RG2012 (0805) OLD:RGH2012-2E included | RG3216 (1206) |
|------------------|--|--|--|---------------|
| L | 1.00±0.05 | 1.60±0.20 | 2.00±0.20 | 3.20±0.20 |
| W | 0.50±0.05 | 0.80±0.20 | 1.25±0.20 | 1.60±0.20 |
| A | 0.20±0.10 | 0.30±0.20 | 0.40±0.20 | 0.50±0.25 |
| B | 0.25±0.05 | 0.30±0.20 | 0.40±0.20 | 0.50±0.20 |
| T | 0.35±0.05 | 0.40±0.10 | 0.40±0.10 | 0.40±0.10 |

NOTE Obsolete: RGH1005-2B (0402) RGH1608-2C (0603) RGH2012-2E (0805)
Alternative P/N: RG1005 (0402) RG1608 (0603) RG2012 (0805)

Electrical characteristics

| Series name | RG1005 | | | | RG1608 | | | | | | |
|--|---|--|-----------------------|-----------------------|-----------------------|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Rated power*1 | High power application Regular power application High precision | 1/8W (OLD: RGH1005-2B) 1/16W 1/32W | | | | 1/6W (OLD: RGH1608-2C) 1/10W 1/16W | | | | | |
| E series offered | E-24, E-96 | | | | | | | | | | |
| Resistance range (Ω) | 10~46.4 | 47~97.6 | 100~2.94k | 3k~100k | 10~46.4 | 47~97.6 | 100~4.99k | 5.1k~270k | 274k~332k | 340k~360k | |
| Resistance tolerance (%) | ±0.02% (P) ±0.05% (W) ±0.1% (B) ±0.25% (C) ±0.5% (D) | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ |
| Temperature coefficient of resistance (ppm/°C) | ±5 (V) ±10 (N) ±25 (P) ±50 (Q) ±100 (R) | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ |
| Maximum voltage | 75V | | | | 100V | | | | | | |
| Operating temperature | -55°C~155°C | | | | -55°C~155°C | | | | | | |
| Packaging | 5,000pcs 10,000pcs | CodeT5 CodeT10 | | | | CodeT5 | | | | | |

| Series name | RG2012 | | | | RG3216 | | | | | |
|--|---|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Rated power*1 | High power application Regular power application High precision | 1/4W (OLD: RGH2012-2E) 1/8W 1/10W | | | | 1/4W 1/8W | | | | |
| E series offered | E-24, E-96 | | | | | | | | | |
| Resistance range (Ω) | 10~46.4 | 47~97.6 | 100~10k | 10.2k~475k | 487k~1M | 10~46.4 | 47~97.6 | 100~33.2k | 34k~1M | |
| Resistance tolerance (%) | ±0.02% (P) ±0.05% (W) ±0.1% (B) ±0.25% (C) ±0.5% (D) | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ | ○ ○ ○ ○ ○ |
| Temperature coefficient of resistance (ppm/°C) | ±5 (V) ±10 (N) ±25 (P) ±50 (Q) | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ | ○ ○ ○ ○ |
| Maximum voltage | 150V | | | | 200V | | | | | |
| Operating temperature | -55°C~155°C | | | | -55°C~155°C | | | | | |
| Packaging | 5,000pcs | | | | CodeT5 | | | | | |


*1 Depending on customer's reliability requirements, power rating between high power and regular power can be selected.
· Contact us for RG3225 with 1/2W rated power.

Reliability characteristics


| Item | Test Method | Specification: drift limits for each power rating | | | | | | (Typical) |
|---------------------------|---|---|--------|-----------------|--------|--------------|--------|-----------|
| | | Low ≤47Ω | ≥47Ω | Regular ≤47Ω | ≥47Ω | High ≤47Ω | ≥47Ω | |
| Short time Overload | Applied voltage : 2.5 times. Test duration: 5 seconds. (When maximum operating voltage: 2 times or less) | ±0.10% | ±0.05% | ±0.10% | ±0.05% | - | ±0.10% | ±(0.01%) |
| Load Life | Test temperature : 85°C (When high voltage : 70°C). Applied voltage : rated voltage. Repeat 1000 hours as follow : 90 mins on/30mins off. | ±0.25% | ±0.10% | ±0.50% | ±0.25% | - | ±0.50% | ±(0.01%) |
| Moisture load life | Test condition: 85°C, 85% RH. Applied power : 1/10 rated power. Repeat 1000 hours as follow : 90 mins on/30mins off. | ±0.25% | ±0.10% | ±0.50% | ±0.25% | - | ±0.50% | ±(0.05%) |
| Temperature Cycle | Repeat 1000 cycle as follow : -55°C (30 min.)/Room Temp.(2 min.) / +125°C (30min.)/Room Temp.(2min.) | ±0.25% | ±0.10% | ±0.25% | ±0.10% | - | ±0.10% | ±(0.01%) |
| High temperature Exposure | +155°C for 1000 hours with no load | ±0.25% | ±0.10% | ±0.25% | ±0.10% | - | ±0.10% | ±(0.01%) |

10000 hour reliability test data


Life test

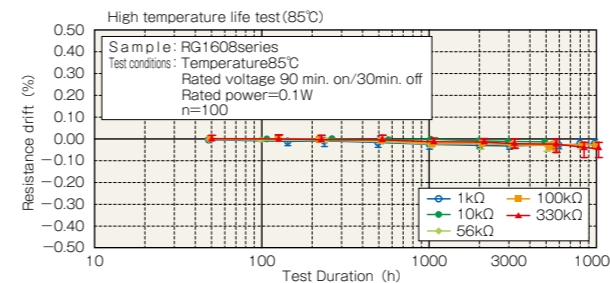


High temperature high humidity bias test

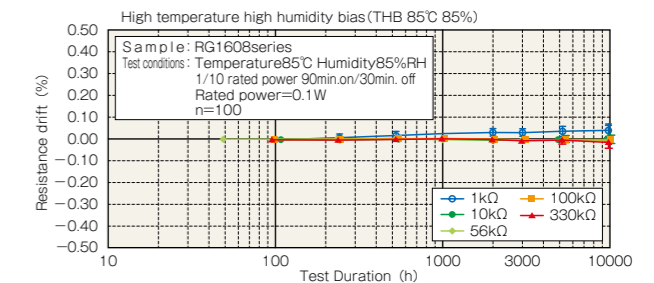


Temperature cycle test

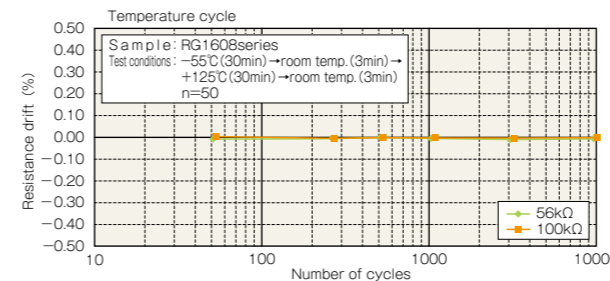


High temperature exposure test

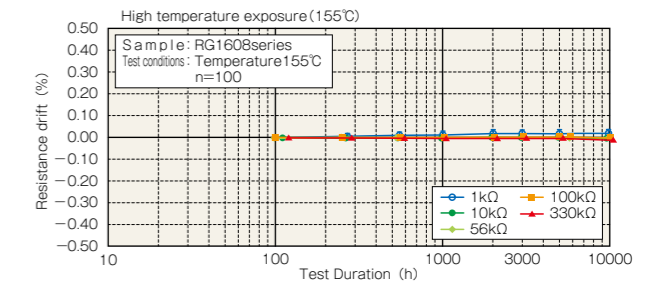

Power derating characteristics

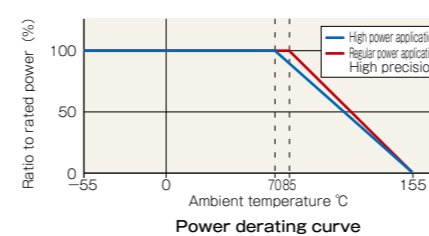

Maximum pulse power limit

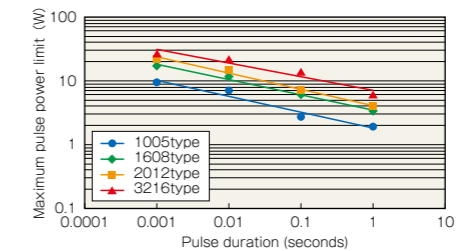

Part numbering system

