

# Multilayer Band Pass Filters

For 2.4GHz W-LAN/Bluetooth

## DEA Series

Type:            **DEA162450BT-1241A1 (1.6×0.8×0.6mm)**  
                    **DEA162450BT-1260B2 (1.6×0.8×0.6mm)**  
                    **DEA162450BT-1262B1 (1.6×0.8×0.6mm)**  
                    **DEA162450BT-1271A3 (1.6×0.8×0.6mm)**  
                    **DEA162450BT-1247C1 (1.6×0.8×0.6mm max.)**  
                    **DEA162450BT-1247B1 (1.6×0.8×0.6mm max.)**  
                    **DEA162450BT-2092A1-H (1.6×0.8×0.6mm max.)**  
                    **DEA162450BT-2096A1-H (1.6×0.8×0.6mm max.)**  
                    **DEA162450BT-1210A1 (1.6×0.8×0.65mm max.)**

Issue date:     December 2010


- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1241A1

## SHAPES AND DIMENSIONS

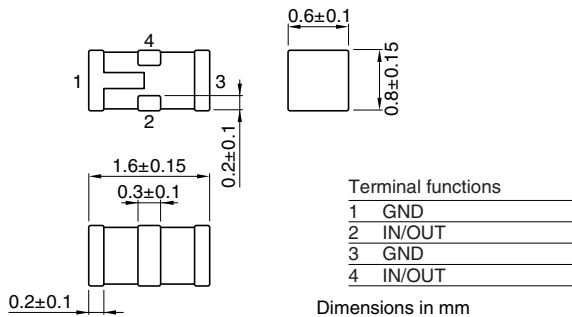

## RECOMMENDED PC BOARD PATTERNS

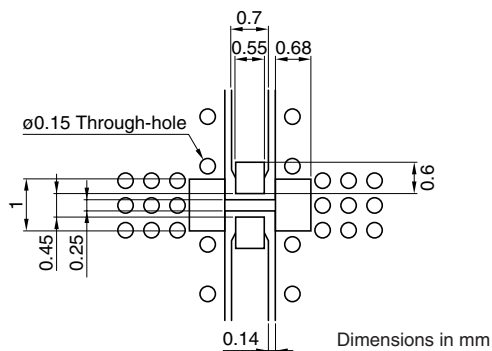

Line width be designed to mach 50Ω characteristic impedance depending on PCB material and thickness

## ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Insertion loss	[2400 to 2500MHz]	(dB)	—	—	2
Return loss	[2400 to 2500MHz]	(dB)	10	—	—
Attenuation	[824 to 915MHz]	(dB)	25	—	—
	[1710 to 1910MHz]	(dB)	25	—	—
	[4800 to 5000MHz]	(dB)	20	—	—
Temperature range	[7200 to 7500MHz]	(dB)	25	—	—
	Operating	(°C)	-40	—	+85
	Storage	(°C)	-40	—	+85


• Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS

#### INSERTION LOSS

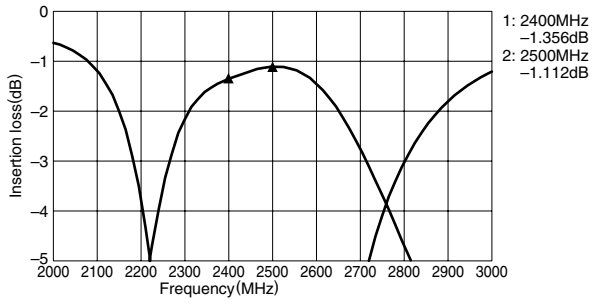

#### ATTENUATION

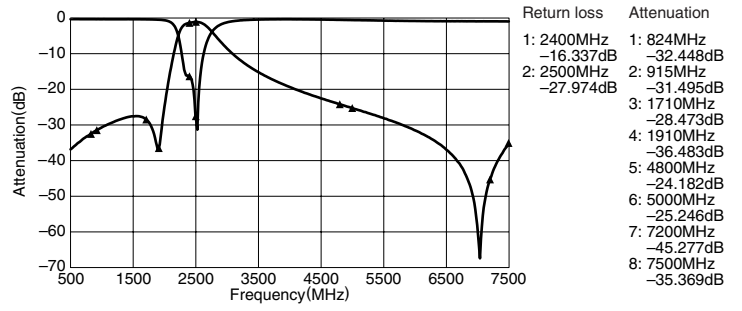


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1260B2

## SHAPES AND DIMENSIONS

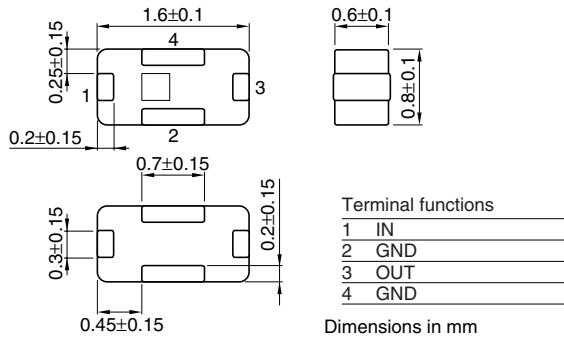

## RECOMMENDED PC BOARD PATTERNS

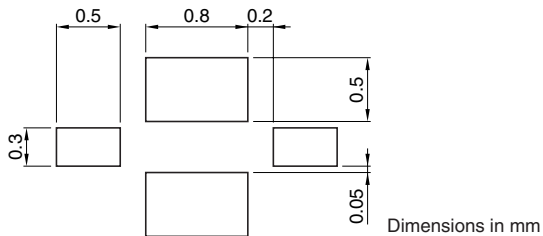

## ELECTRICAL CHARACTERISTICS

Item		Typical value
Frequency range(Pass band)	2400 to 2500MHz	—
Characteristic impedance(Pass band)	50Ω (Nominal)	—
Insertion loss(Pass band)	2.2dB max.	1.7dB
VSWR(Pass band)	2.1 max.	1.4
Attenuation	[960MHz]	25dB min. 34dB
	[1600MHz]	15dB min. 27dB
	[3200MHz]	22dB min. 41dB
	[4800 to 5000MHz]	25dB min. 31dB
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C


· Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### INSERTION LOSS

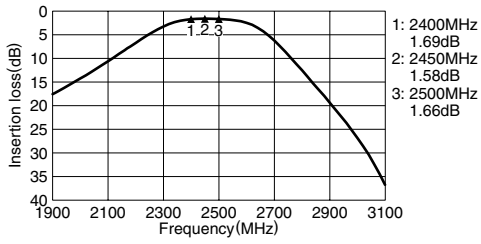


#### ATTENUATION

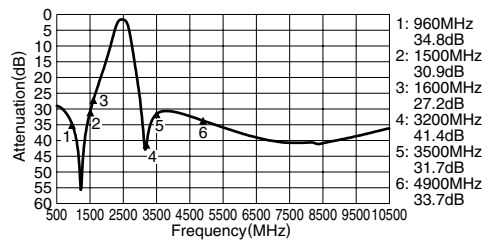

#### RETURN LOSS

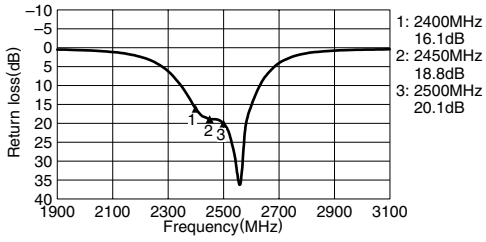

#### VSWR

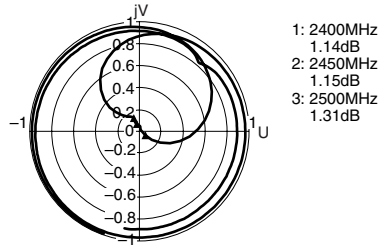


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1262B1

## SHAPES AND DIMENSIONS

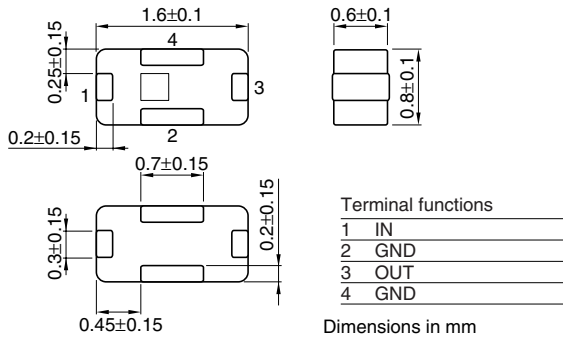

## RECOMMENDED PC BOARD PATTERNS

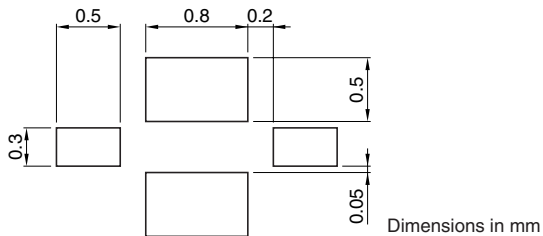

## ELECTRICAL CHARACTERISTICS

Item		Minimum value	Typical value	Maximum value
Frequency range(Pass band)	(MHz)	2400	—	2500
Characteristic impedance(Pass band)	(Ω)	—	50[Nominal]	—
Insertion loss(Pass band)	[+25°C] (dB)	—	1.5	2.4
Ripple(Pass band)	(dB)	—	0.3	1.5
VSWR(Pass band)		—	1.2	2.1
Attenuation	[880 to 960MHz]	(dB)	24.5	30
	[1710 to 1990MHz]	(dB)	20	27
	[2170MHz]	(dB)	8.5	11
	[4800 to 5000MHz]	(dB)	15.5	21
	[7200 to 7500MHz]	(dB)	20	28
Temperature range	Operating	(°C)	-40	+85
	Storage	(°C)	-40	+85


· Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### INSERTION LOSS

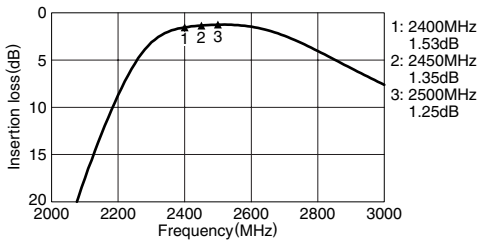


#### ATTENUATION

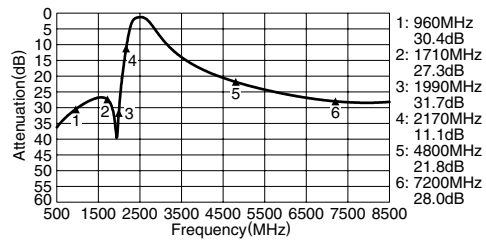

#### RETURN LOSS

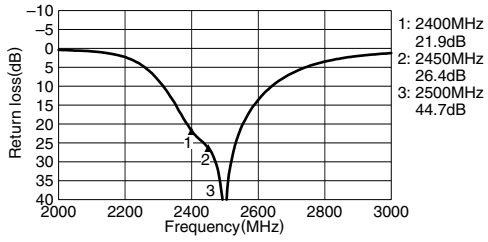

#### VSWR

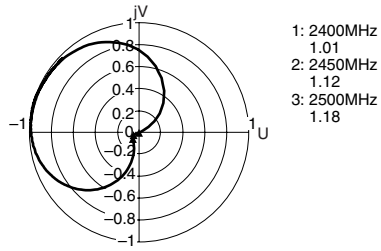


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1271A3

## SHAPES AND DIMENSIONS

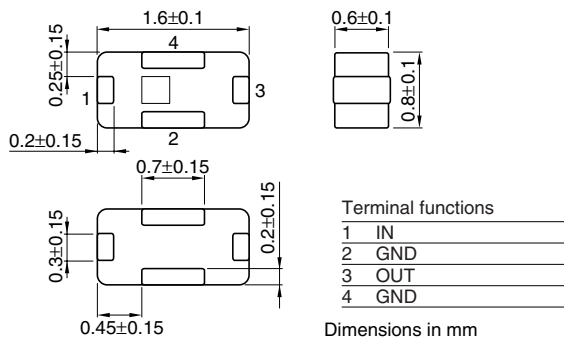

## RECOMMENDED PC BOARD PATTERNS

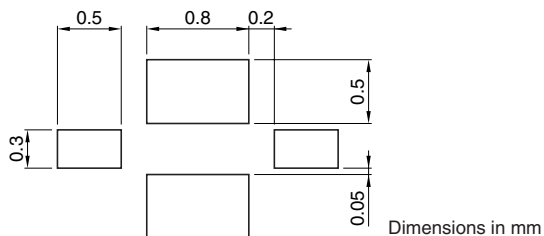

## ELECTRICAL CHARACTERISTICS

Item		Minimum value	Typical value	Maximum value
Frequency range(Pass band)	(MHz)	2400	—	2500
Characteristic impedance(Pass band)	(Ω)	—	50[Nominal]	—
Insertion loss(Pass band)	[+25°C] (dB)	—	2.3	3.0
Return loss(Pass band)	(dB)	10	16	—
Attenuation	[695 to 800MHz] (dB)	25	45	—
	[1910MHz] (dB)	22	28	—
	[3200MHz] (dB)	35	46	—
	[4800 to 5000MHz] (dB)	20	27	—
	[7200 to 7500MHz] (dB)	20	27	—
Temperature range	Operating (°C)	-40	—	+85
	Storage (°C)	-40	—	+85

• Ta:+25°C


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.




### FREQUENCY CHARACTERISTICS


#### INSERTION LOSS

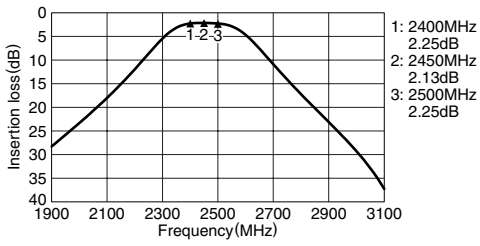


#### ATTENUATION

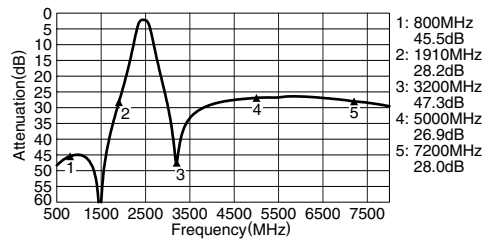

#### RETURN LOSS

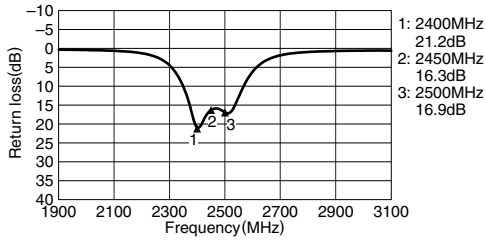

#### VSWR

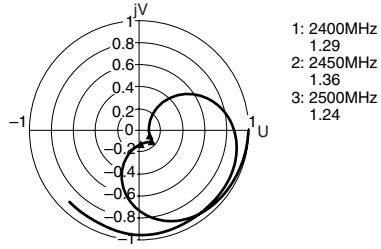


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1247C1

## SHAPES AND DIMENSIONS

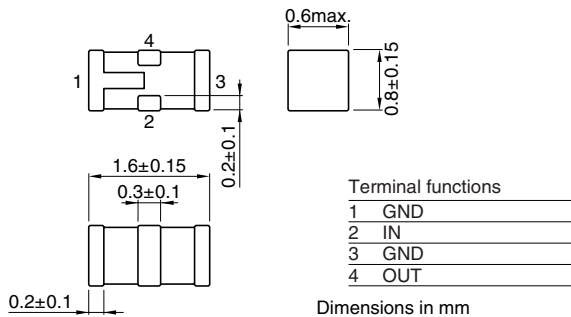

## RECOMMENDED PC BOARD PATTERNS

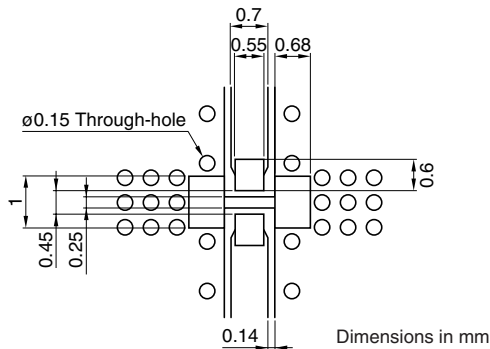

Line width be designed to mach 50Ω characteristic impedance depending on PCB material and thickness

## ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Insertion loss	[2400 to 2500MHz]	(dB)	—	—	2.5
Return loss	[2400 to 2500MHz]	(dB)	8	—	—
Attenuation	[824 to 915MHz]	(dB)	25	—	—
	[1710 to 1910MHz]	(dB)	20	—	—
	[4800 to 5000MHz]	(dB)	25	—	—
	[7200 to 7500MHz]	(dB)	15	—	—
Temperature range	Operating	(°C)	-40	—	+85
	Storage	(°C)	-40	—	+85


• Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS

#### INSERTION LOSS

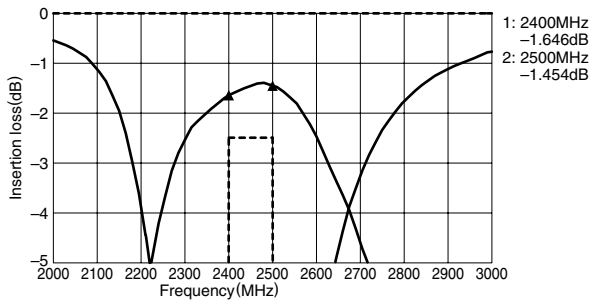

#### ATTENUATION

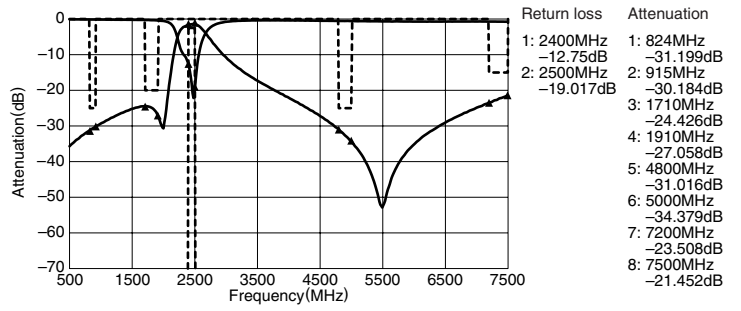


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1247B1

## SHAPES AND DIMENSIONS

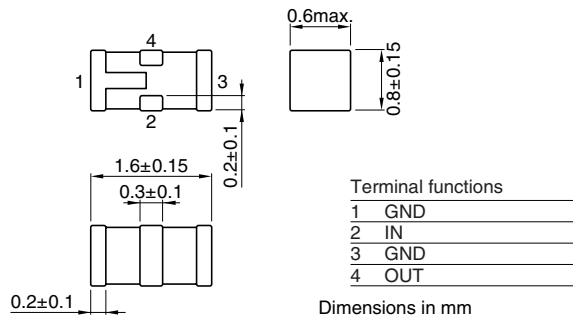

## RECOMMENDED PC BOARD PATTERNS

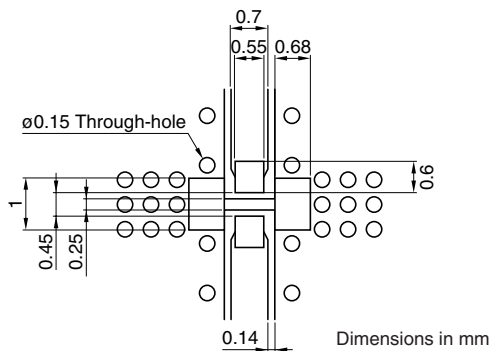

Line width be designed to mach 50Ω characteristic impedance depending on PCB material and thickness

## ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Insertion loss	[2400 to 2500MHz]	(dB)	—	—	2.0
Return loss	[2400 to 2500MHz]	(dB)	10	—	—
Attenuation	[824 to 915MHz]	(dB)	25	—	—
	[1710 to 1910MHz]	(dB)	20	—	—
	[4800 to 5000MHz]	(dB)	20	—	—
	[7200 to 7500MHz]	(dB)	30	—	—
Temperature range	Operating	(°C)	-40	—	+85
	Storage	(°C)	-40	—	+85


• Ta: +25°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS

#### INSERTION LOSS

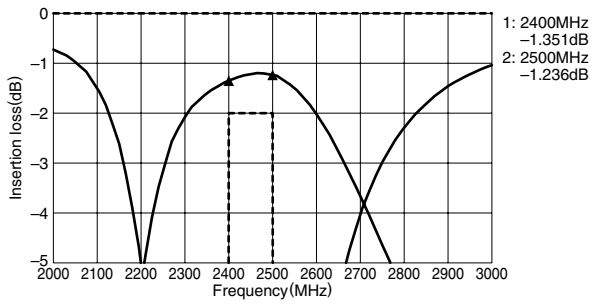

#### ATTENUATION

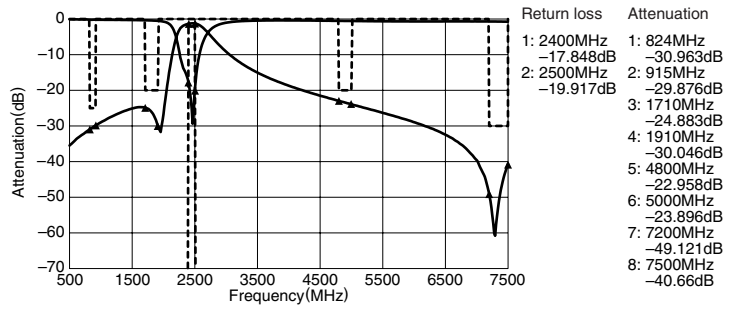


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-2092A1-H

## SHAPES AND DIMENSIONS

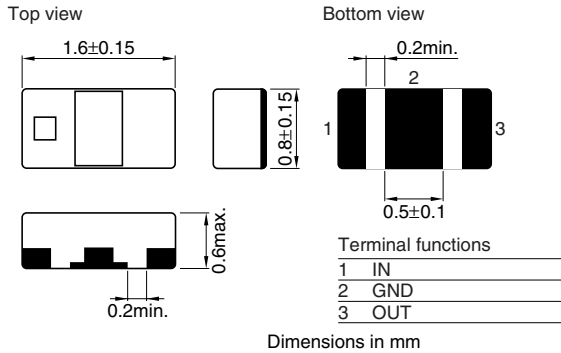

## RECOMMENDED PC BOARD PATTERNS

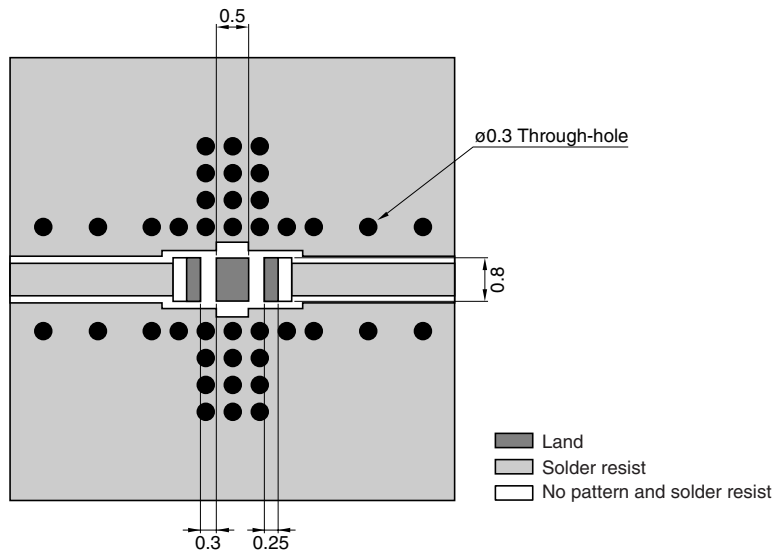

Line width be designed to mach  $50\Omega$  characteristic impedance depending on PCB material and thickness

Dimensions in mm

## ELECTRICAL CHARACTERISTICS


Item		
Frequency range(Pass band)		2400 to 2500MHz
Insertion loss	[+25°C]	3.2dB max.
	[-40 to +85°C]	3.5dB max.
Return loss	[2400 to 2500MHz]	10dB min.
	[880 to 915MHz]	40dB min.
	[1710 to 1850MHz]	40dB min.
	[1850 to 1910MHz]	40dB min.
	[1920 to 1990MHz]	40dB min.
	[2110 to 2170MHz]	35dB min.
Attenuation	[4800 to 5000MHz]	30dB min.
	[7200 to 7500MHz]	30dB min.
	Operating	-40 to +85°C
Temperature range	Storage	-40 to +85°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### INSERTION LOSS

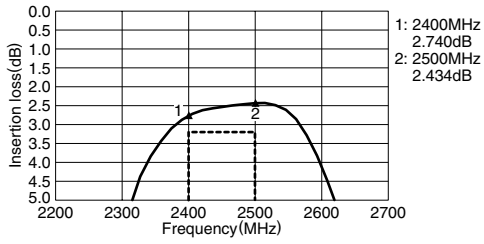


#### ATTENUATION

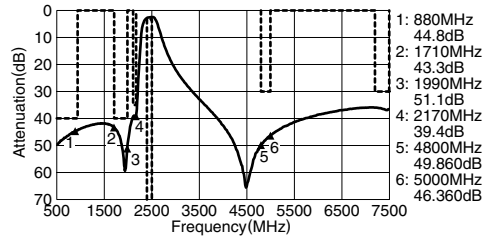

#### RETURN LOSS

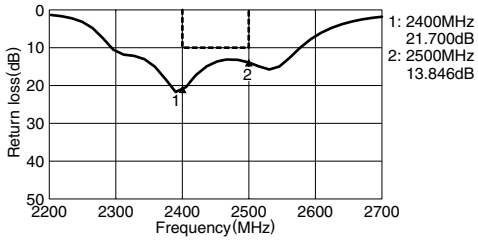

#### VSWR

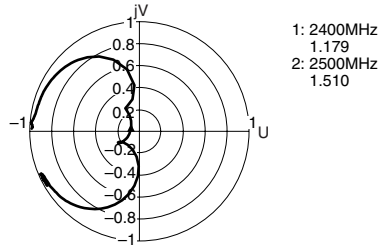


# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-2096A1-H

## SHAPES AND DIMENSIONS

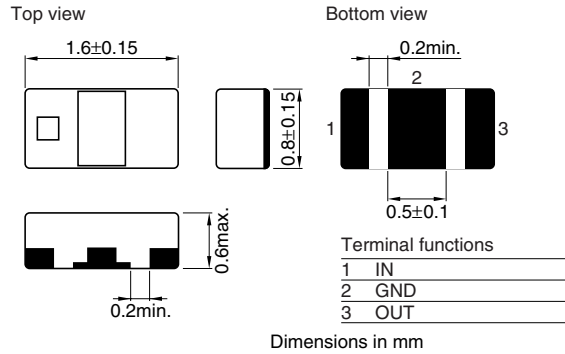

## RECOMMENDED PC BOARD PATTERNS

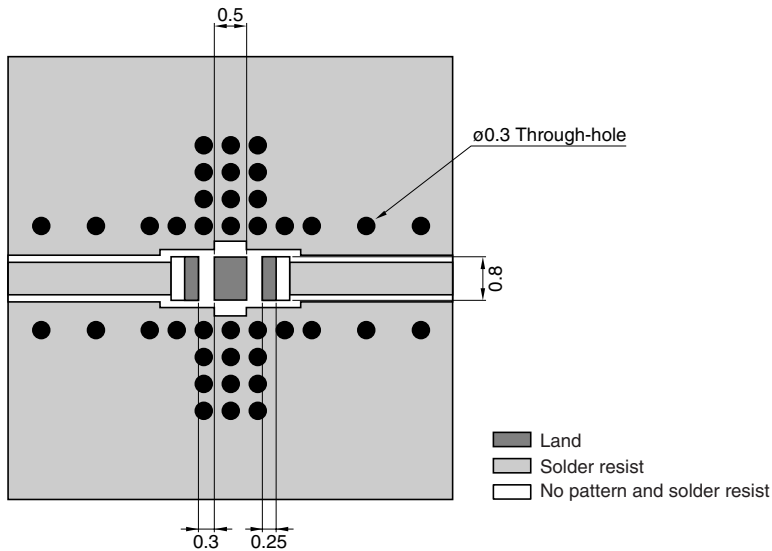

## ELECTRICAL CHARACTERISTICS

Item		
Frequency range(Pass band)		2400 to 2500MHz
Insertion loss	[+25°C]	2.5dB max.
	[-40 to +85°C]	2.8dB max.
Return loss	[2400 to 2500MHz]	10dB min.
	[880 to 915MHz]	40dB min.
	[1710 to 1850MHz]	40dB min.
	[1850 to 1910MHz]	40dB min.
	[1920 to 1990MHz]	40dB min.
	[2110 to 2170MHz]	25dB min.
Attenuation	[4800 to 5000MHz]	30dB min.
	[7200 to 7500MHz]	20dB min.
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.




### FREQUENCY CHARACTERISTICS


#### INSERTION LOSS

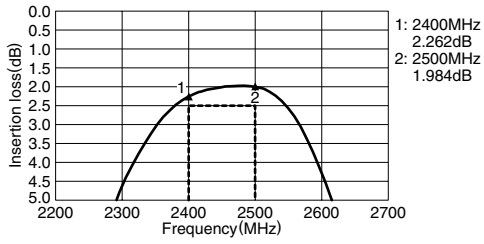


#### ATTENUATION

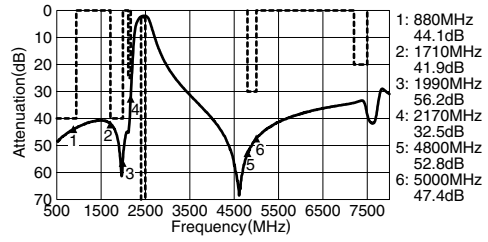

#### RETURN LOSS

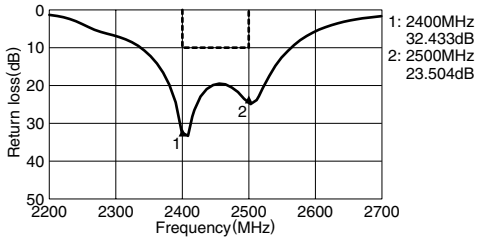

#### VSWR

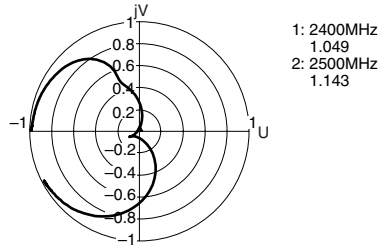


• All specifications are subject to change without notice.

# Multilayer Chip Band Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA162450BT-1210A1

## SHAPES AND DIMENSIONS

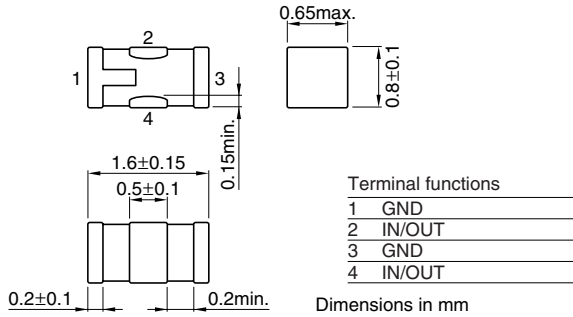

## RECOMMENDED PC BOARD PATTERNS

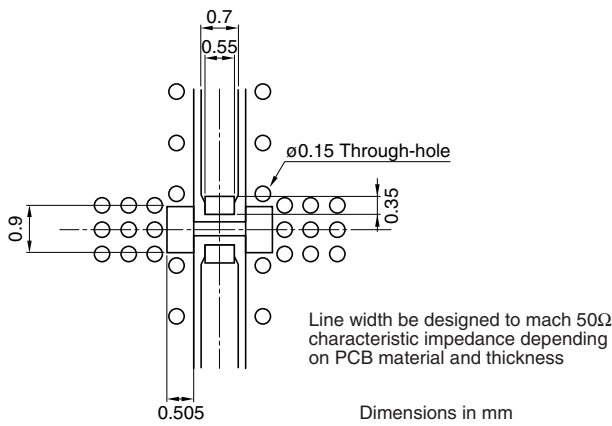


## ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Center frequency		[2450MHz]			
Insertion loss	[25°C]	[2400 to 2500MHz]	—	—	3.0
	[-40 to +85°C]	[2400 to 2500MHz]	—	—	3.3
Return loss		[2400 to 2500MHz]	7	—	—
		[880 to 915MHz]	32	—	—
Attenuation		[915 to 1250MHz]	30	—	—
		[1710 to 1900MHz]	30	—	—
		[1900 to 2000MHz]	20	24	—
		[4800 to 5000MHz]	25	—	—
	Temperature range	Operating	(°C)	-40	—
Storage		(°C)	-40	—	+85

• Ta: +25°C

## FREQUENCY CHARACTERISTICS

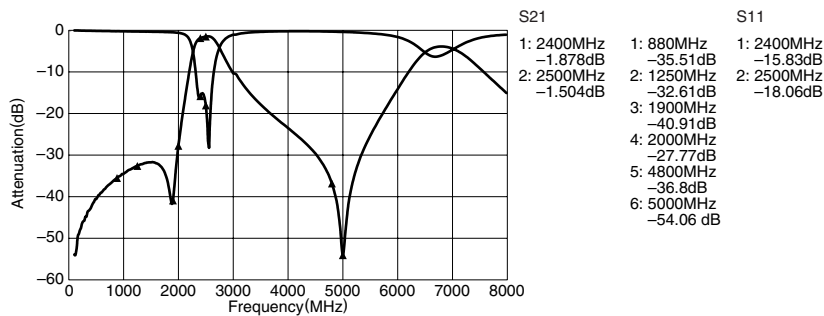

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.