






# MMZ1608A152ETA00

Applications		Commercial Grade
Feature		GHz
		High Z for Wide Band
		High Speed Signal Line
Series	MMZ Series / MMZ1608 Type	
Status	Production (Recommended Alternate Part is available.)(Recommended Alternate Part Number:MMZ1005A152ET000)	



Size	
Length(L)	1.60mm +/-0.15mm
Width(W)	0.80mm +/-0.15mm
Thickness(T)	0.80mm +/-0.15mm
Recommended Land Pattern (A)	0.60mm Nom.
Recommended Land Pattern (B)	0.80mm Nom.
Recommended Land Pattern (C)	0.80mm Nom.

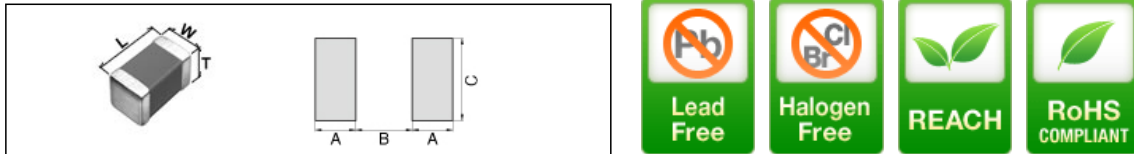
Electrical Characteristics	
Impedance at 100MHz	1.5kΩ +/-25%
Rated Current	300mA
DC Resistance [Max.]	1Ω

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.004g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# MMZ1608A152ETA00

**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

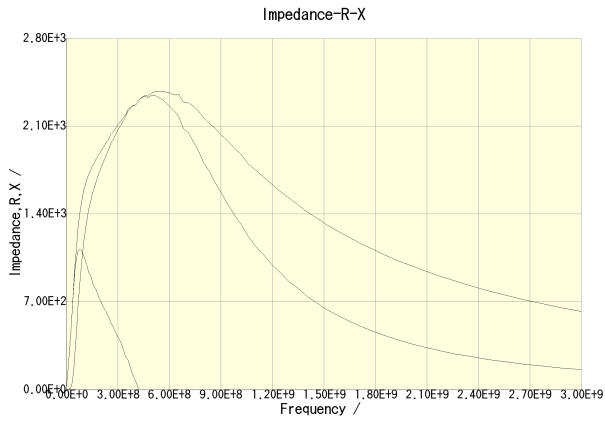

MMZ1608A152ETA00(J)MMZ1608A152ETA00(R)MMZ1608A152ETA00(X)

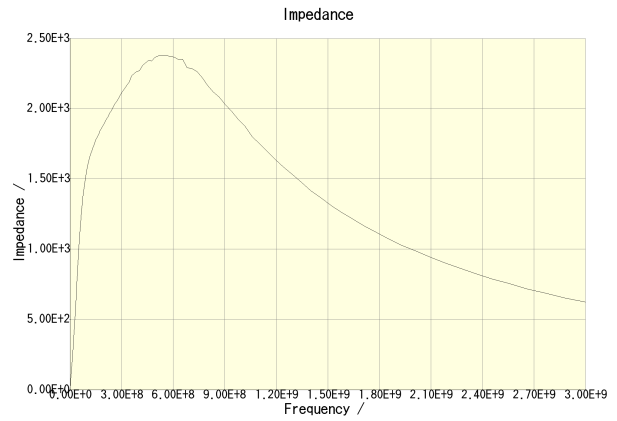

MMZ1608A152ETA00

Temperature Rise by DC
no data available

Derating
no data available

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.