


CD70ZU2GA102MYNKA

Applications		Commercial Grade
Feature		Mid Voltage (100 to 630V)
		Safety Standard Approved
Series	CD Series	

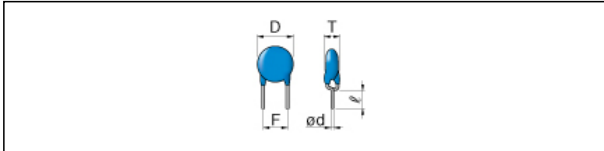

Size	
Diameter(D)	7.00mm Max.
Thickness(T)	7.00mm Max.
Lead Space(F)	10.00mm +2.00/-1.00mm
Lead Diameter(d)	0.60mm +/-0.05mm


Electrical Characteristics	
Capacitance	1nF +/-20%
Rated Voltage	400Vac
Withstanding Voltage	4000Vac
Temperature Characteristic	Z5U(+22,-56%)
Dissipation Factor	2.5% Max.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Flow, Iron Soldering
Lead Length / Package Type	5mm for Bulk
AEC Q200	No
Package Quantity	1000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CD70ZU2GA102MYNKA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

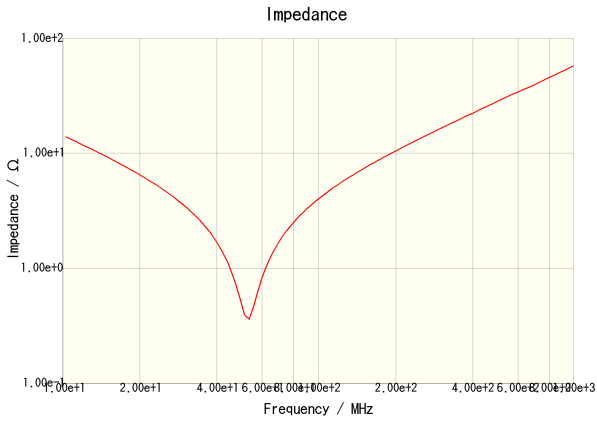

CD70ZU2GA102MYNKA

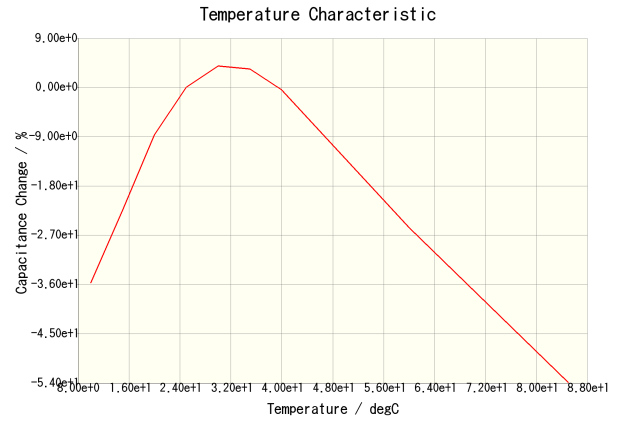

CD70ZU2GA102MYNKA

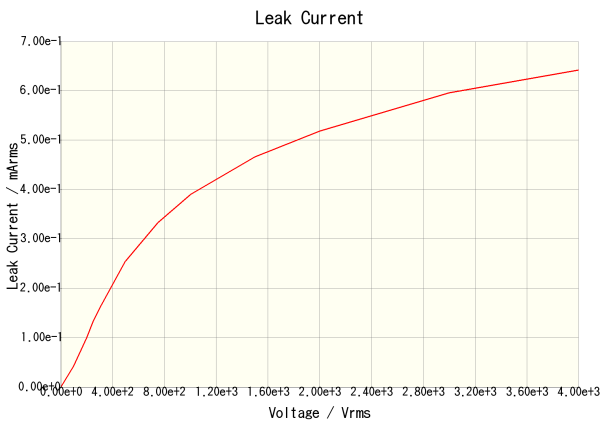

CD70ZU2GA102MYNKA

Max. Allowable Voltage
no data available

- This PDF document was created based on the data listed on the TDK Corporation website.
- All specifications are subject to change without notice.