


**06505 TYPE MULTILAYER Low Pass Filter**  
P/N: **DEA071910LT-4003B1**

**MECHANICAL DIMENSIONS**

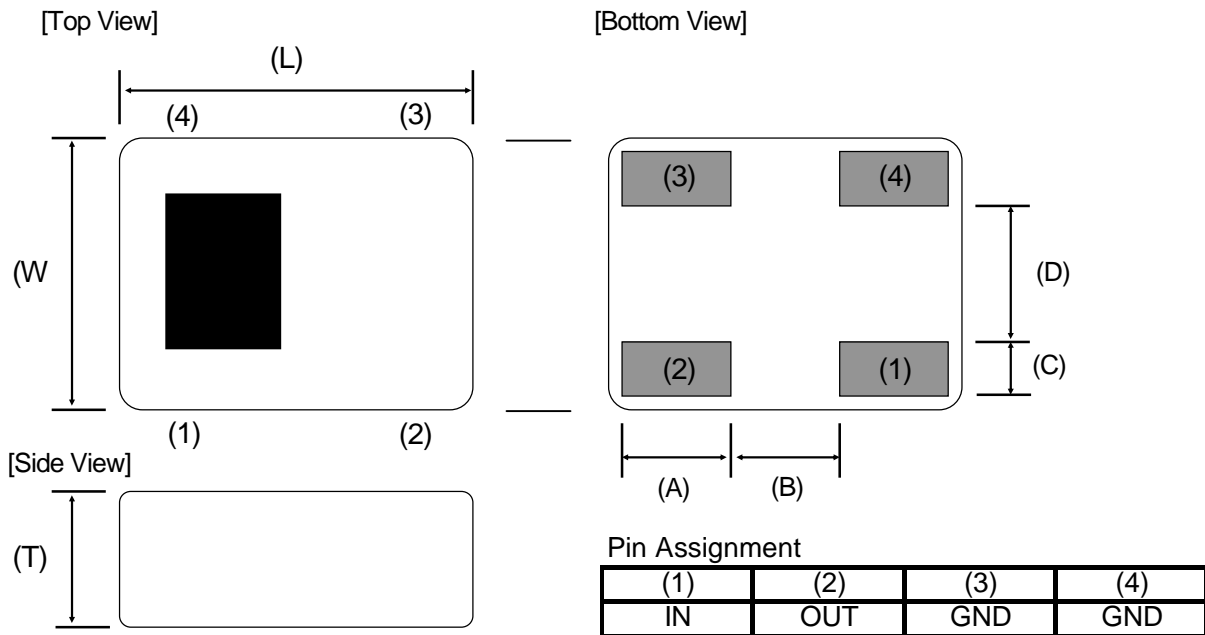

Dimension(mm)

L	W	T	A	B	C	D
0.65	0.50	0.25	0.20	0.20	0.115	0.21
+/-0.05	+/-0.05	+/-0.05	+/-0.05	+/-0.05	+/-0.05	+/-0.05


**TEMPERATURE RANGE**

Storage Temperature	-40 ~ +85 °C
Operating Temperature	-40 ~ +85 °C

## ELECTRICAL CHARACTERISTICS (Ta= +25 ± 5 °C)

No.	Parameter	Freq.(MHz)	Spec.	Typical.	Unit
1	Insertion Loss	1710 – 1910	0.55 max.	0.43	dB
2	Attenuation	3420 - 3820	30 min.	35.4	dB
3		5130 – 5730	20 min.	22.8	dB
4	VSWR	1710 – 1910	2.0 max.	1.22	-

## FREQUENCY CHARACTERISTICS

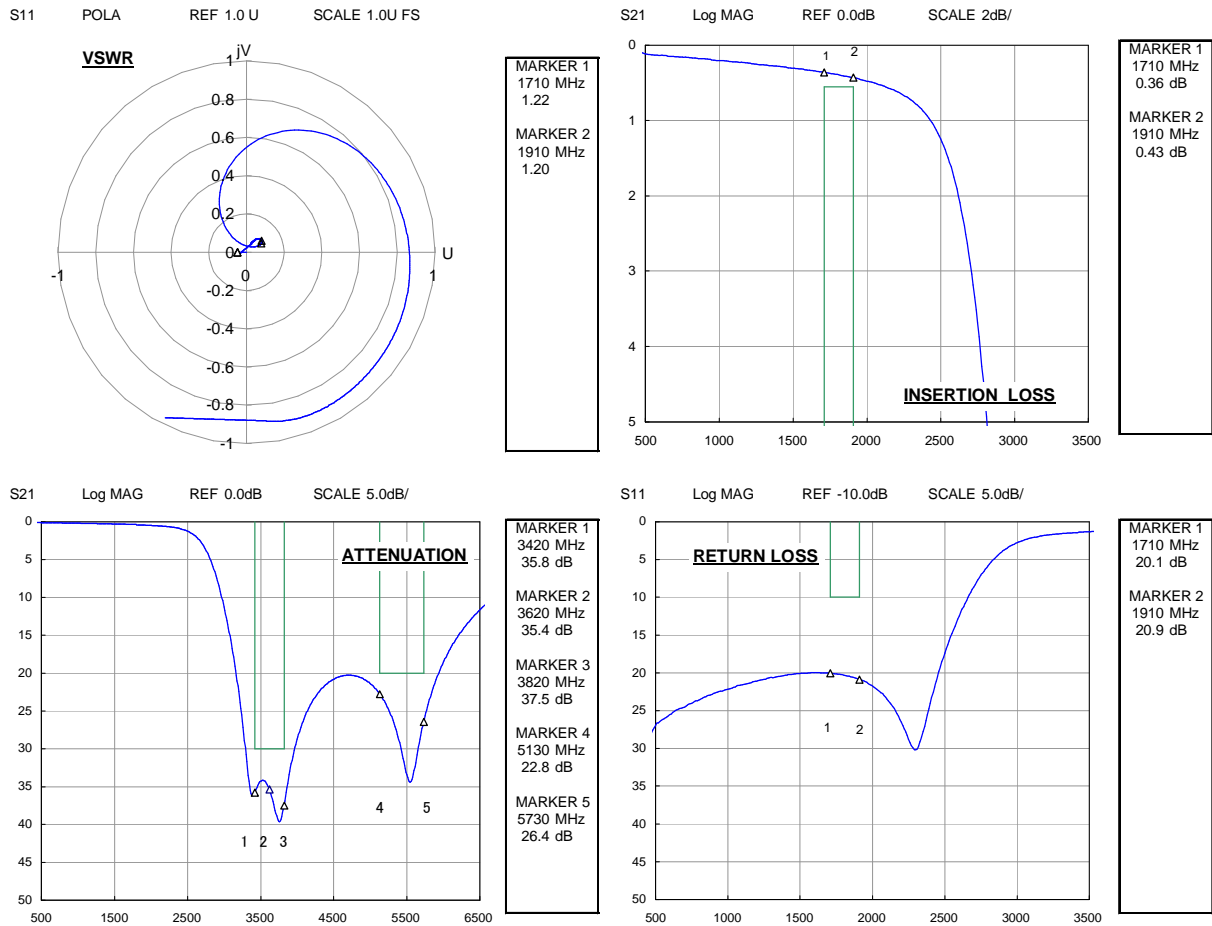

Note: All specifications are subject to change and are not guaranteed.

## RECOMMENDED LAND PATTERN

