

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
COPYRIGHT - By TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS		
HB	-	P	LTR	DESCRIPTION
		C		PN. OBSOLETE
				ECO-12-004810
				DATE
				24-APR-12
				DWN
				BLJ
				APVD
				BHY

D


C

B



A

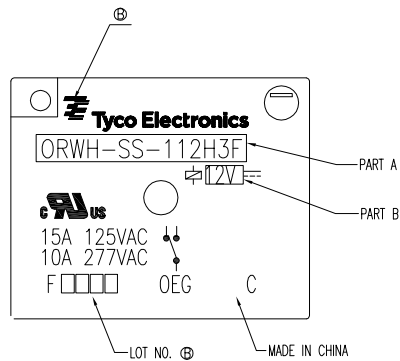

CIRCUIT DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (BOTTOM VIEW)

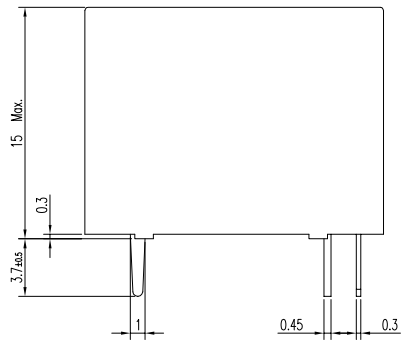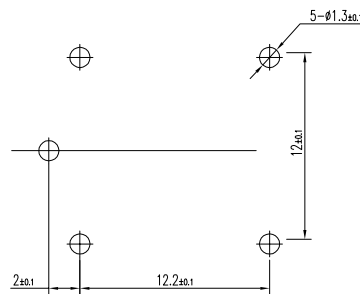

NOTE
①.LOT NO. SYSTEM AS FOLLOWING:

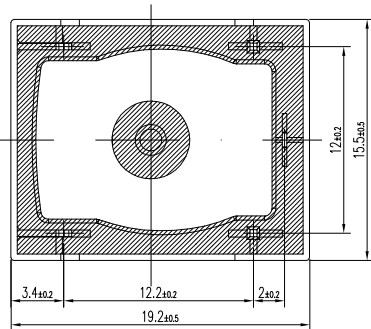



Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
	ANGLES ±
MATERIAL	FINISH
-	-

DWN	FU BO
CHK	XN.ZHANG
APVD	CH.HSU
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

STATUS	PART NO	EC TYPE NAME	PART B	PART A	ITEM
OBSOLETE	1721956-1	ORWH-SS-103H3F,000	3V	ORWH-SS-103H3F	A
OBSOLETE	1721956-2	ORWH-SS-105H3F,000	5V	ORWH-SS-105H3F	B
OBSOLETE	1721956-3	ORWH-SS-106H3F,000	6V	ORWH-SS-106H3F	C
OBSOLETE	1721956-4	ORWH-SS-109H3F,000	9V	ORWH-SS-109H3F	D
ACTIVE	1721956-5	ORWH-SS-112H3F,000	12V	ORWH-SS-112H3F	E
OBSOLETE	1721956-6	ORWH-SS-118H3F,000	18V	ORWH-SS-118H3F	F
OBSOLETE	1721956-7	ORWH-SS-122H3F,000	22V	ORWH-SS-122H3F	G
ACTIVE	1721956-8	ORWH-SS-124H3F,000	24V	ORWH-SS-124H3F	H
OBSOLETE	1721956-9	ORWH-SS-148H3F,000	48V	ORWH-SS-148H3F	I
OBSOLETE	1-1721956-0	ORWH-SH-103H3F,000	3V	ORWH-SH-103H3F	J
OBSOLETE	1-1721956-1	ORWH-SH-105H3F,000	5V	ORWH-SH-105H3F	K
OBSOLETE	1-1721956-2	ORWH-SH-106H3F,000	6V	ORWH-SH-106H3F	L
OBSOLETE	1-1721956-3	ORWH-SH-109H3F,000	9V	ORWH-SH-109H3F	M
ACTIVE	1-1721956-4	ORWH-SH-112H3F,000	12V	ORWH-SH-112H3F	N
OBSOLETE	1-1721956-5	ORWH-SH-118H3F,000	18V	ORWH-SH-118H3F	O
OBSOLETE	1-1721956-6	ORWH-SH-122H3F,000	22V	ORWH-SH-122H3F	P
ACTIVE	1-1721956-7	ORWH-SH-124H3F,000	24V	ORWH-SH-124H3F	Q
OBSOLETE	1-1721956-8	ORWH-SH-148H3F,000	48V	ORWH-SH-148H3F	R

CLASS	DESCRIPTION	ITEM
	UV RESIN	UV SEAL
	EPOXY RESIN	SEAL
CLASS 155 F	MW79	MAGNETIC WIRE
	HCP	COIL TERMINAL
UL94 V-0	PET	BOBBIN
UL94 V-0	NYLON	CASE
	Ag ALLOY	STATIONARY CONTACT
	Ag ALLOY	MOVABLE CONTACT
	Cu ALLOY	MOVABLE SPRING
	Cu ALLOY	NC TERMINAL
	Cu ALLOY	NO TERMINAL
	Ni PLATED	STEEL
	Cu PLATED	STEEL
	Ni PLATED	STEEL
INCOMBUSTIBILITY TREATMENT	MATERIAL	DESCRIPTION
		ITEM

STE TE Connectivity

NAME: ORWH-H3F,000 CUSTOMER DRAWING

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1721956 RESTRICTED TO: -

SCALE: 3:1 SHEET: 1 OF 1 REV: C