


COIL: @ +25°C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.5 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS AT 30 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES:  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

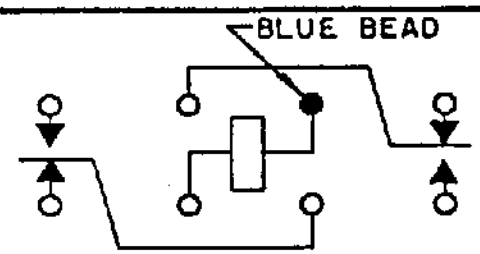

CONTACT RATING: Low Level  
2 AMPS, 28 VDC 100,000  
Operations

DR. 10-2-86

CK. JMB



CUST. CII STD.  
 CUST. NO. 39016/6-209P

TYPE HFW RELAY

HFW 1201 K46P