


COIL: @ 25°C  
 RESISTANCE 218 Ω ±10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 9.2 VDC  
 MUST RELEASE \_\_\_\_\_

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS.DURATION  
 TEMPERATURE -45 °C TO +70 °C


NOTES: OPERATE TIME 5 MS MAX  
RELEASE TIME 3 MS MAX  
500VAC DIELECTRIC ALL POINTS

CUSTOMER DATA SHEET

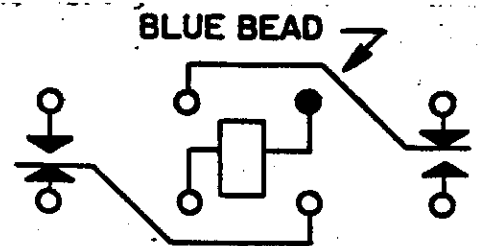

CONTACT RATING: 2A RESISTIVE  
28 VDC 100,000 OPERATIONS

DR. R.B. 1-25-91 CK. (125/91) JMB



CUST. P & B  
 CUST. NO. HPS-11D-12

TYPE HFW RELAY

**HFW1201S168**