


COIL: @ +25°C
 RESISTANCE 200 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 6.0 VDC
 MUST RELEASE _____

CUSTOMER DATA SHEET

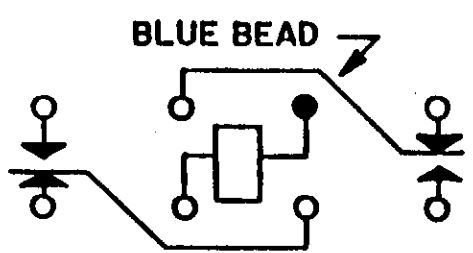

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 2.0 g's
 SHOCK 150 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC 100,000 OPERATIONS

NOTES: OPERATE TIME 3.5 MS MAX
 RELEASE TIME 3 MS MAX
 CONTACT BOUNCE 1 MS MAX

DR. 8/1/91 JAB CK. 8/1/91 QMB



CUST. P+B
 CUST. NO. HC-110-12

TYPE HFW RELAY

HFW1201S264