

| | |
|------------------------|-----------------------|
| COIL: 26.5 VDC NOMINAL | |
| WINDING #1 | WINDING #2 |
| 1000 OHMS ± 10% | 1000 OHMS ± 10% |
| 8-13 VDC MUST OPERATE | 8-13 VDC MUST OPERATE |


ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: _____

CUST. CII STD
 CUST. NO. _____

TYPE "LS" RELAY

CUSTOMER DATA SHEET

CONTACTS WILL SWITCH FROM THE INDICATED POSITION WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN.

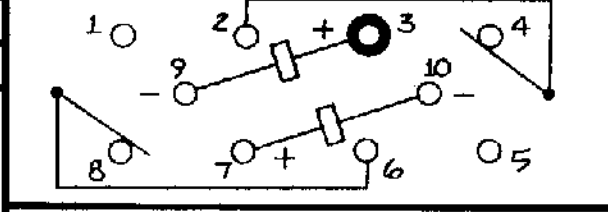

CONTACT RATING: 2 AMP / 28 VDC RESISTIVE

DR. R.B. 4-5-90 | OK. JAW 4-5-90



LSAW-ZC-24B