
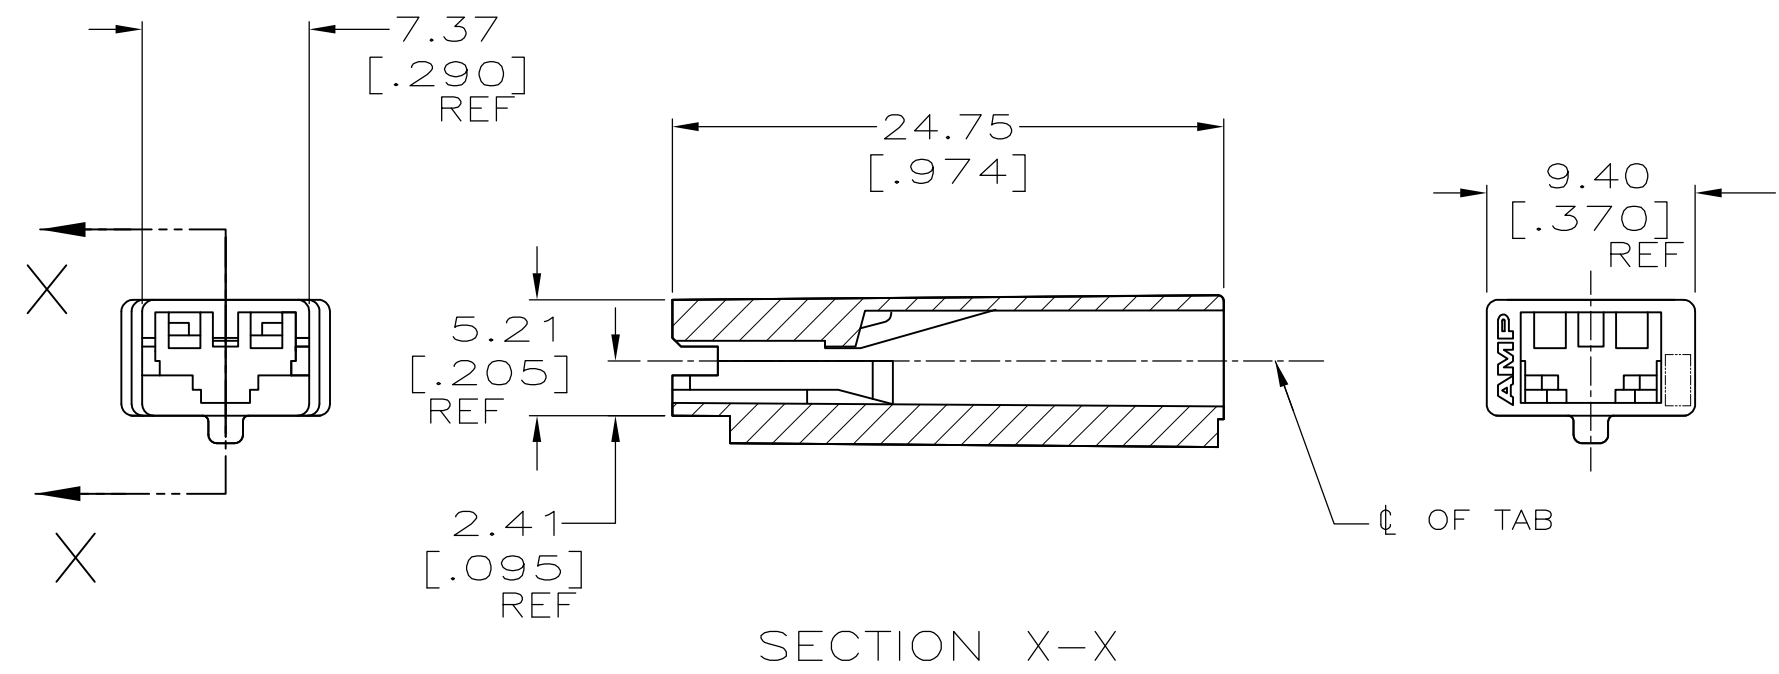


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	E	REVISED PER ECO-13-014735	19SEP2013	KH MD

SUGGESTED MATING TAB

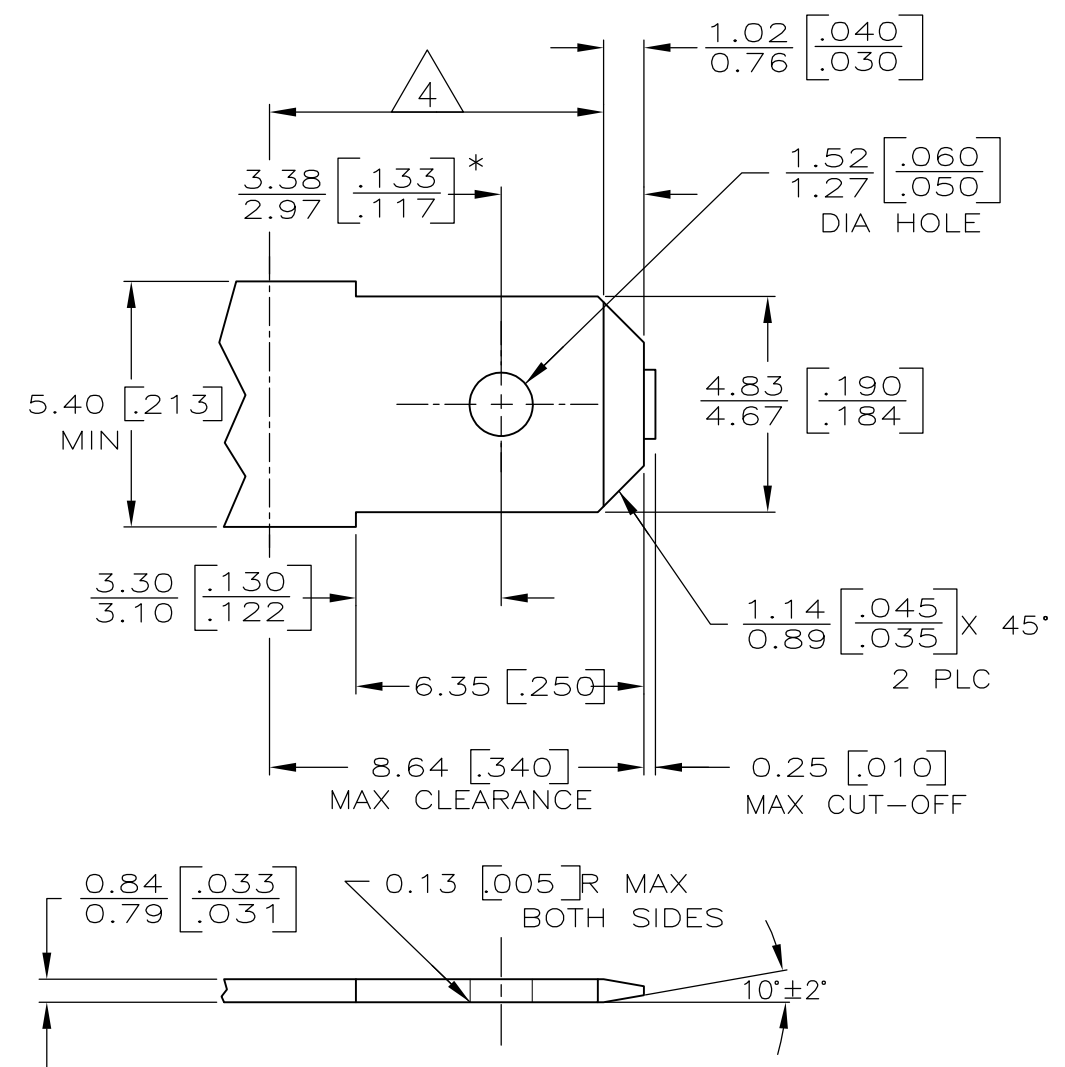

- 1 ACCEPTS CONTACTS FOR 0.81 [.032] THICK TABS ONLY. EXAMPLE, 63498, 173690.
- △ 2 PRELIMINARY - NOT FOR PRODUCTION

- 1 MATL: #2 HARD BRASS OR NICKEL PLATED STEEL.
- 2 NO BURRS PERMISSIBLE AT HOLE.
- 3 TIN PLATING IS REQUIRED ON BRASS WHEN TERMINAL TEMPERATURE IS OVER 225° F
- △ 4 MUST BE FLAT WITHIN 0.076 [.003] OVER THIS LENGTH.
- 5 HOLE MUST BE SYMMETRICAL ABOUT TAB  $\phi$  WITHIN 0.076 [.003].
- \* TO BE USED ONLY WHEN SHOULDER IS ELIMINATED.

66 NYLON, V0	521125-3
STANYL TW341	△ 521125-2
6/6 NYLON	521125-1
MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH	11/15/96	<b>STE</b> TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK	MS FEHER	11/15/96				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J GILLESPIE	11/15/96	NAME			
0 PLC	± -	PRODUCT SPEC			HOUSING, POSITIVE-LOCK, 4.75 [.187] SERIES, MK II			
1 PLC	± -	APPLICATION SPEC			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC	± 0.25 [.010]	WEIGHT			A3	00779	C-521125	-
3 PLC	± -	MATERIAL			CUSTOMER DRAWING			SCALE
4 PLC	± -	FINISH			3:1			SHEET
ANGLES	± -	SEE TABLE			1 OF 1			REV
	NATURAL				E			