THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By: - ALL RIGHTS RESERVED.

LOC	DIST
AD	47

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECO-12-007590	19JUL12	KH	MH

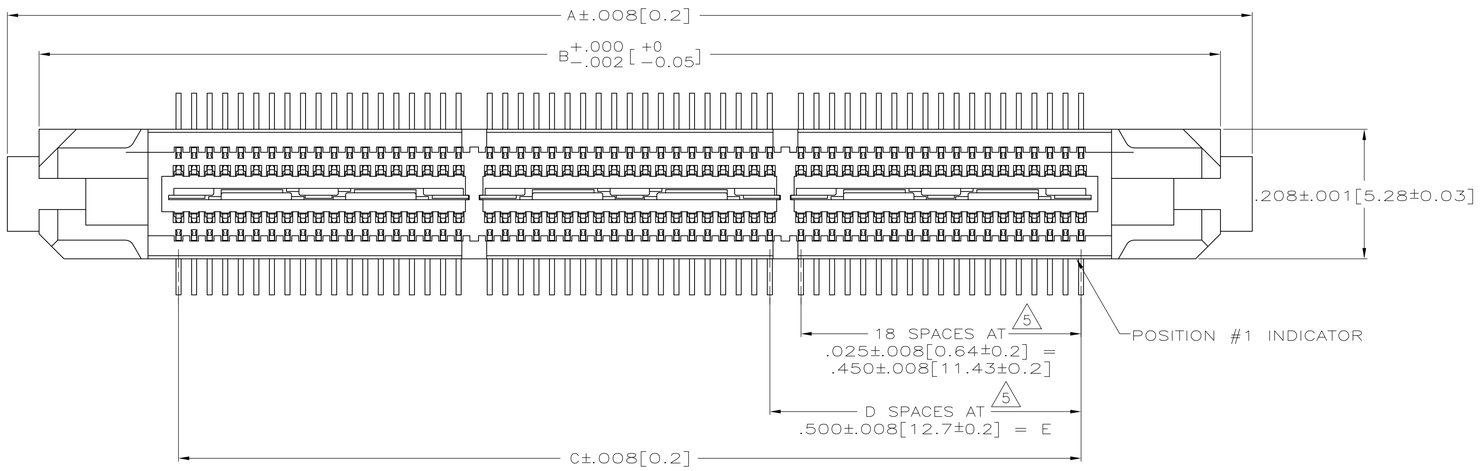

1. HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
   CONTACTS: HIGH RELIABILITY COPPER ALLOY.
   GROUND BUSSES: BRASS,UNS C26000
2. CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 1 PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED MATTE TIN.
3. DATE CODE MARKED IN AREA INDICATED ON OPPOSITE SIDE OF POSITION #1.
4. ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
5. TOLERANCE NON-ACCUMULATIVE.
6. FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE ø.094±.002[2.39±0.05].
   FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE ø.079±.001[2.00±0.03].

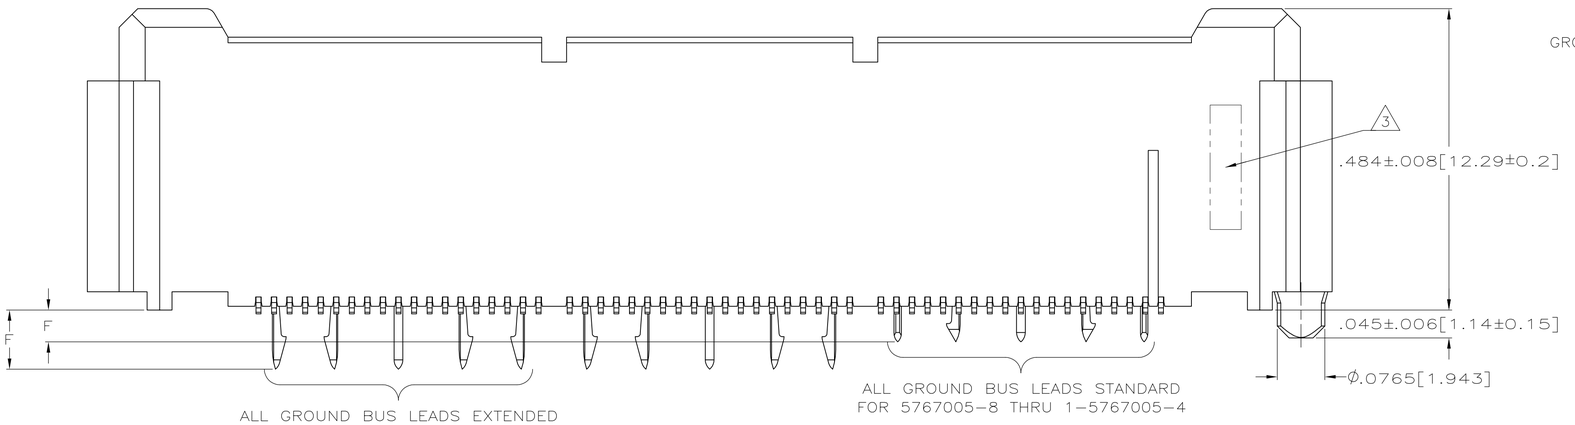

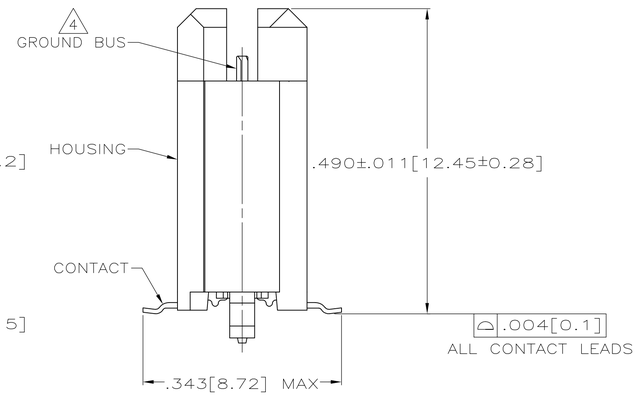

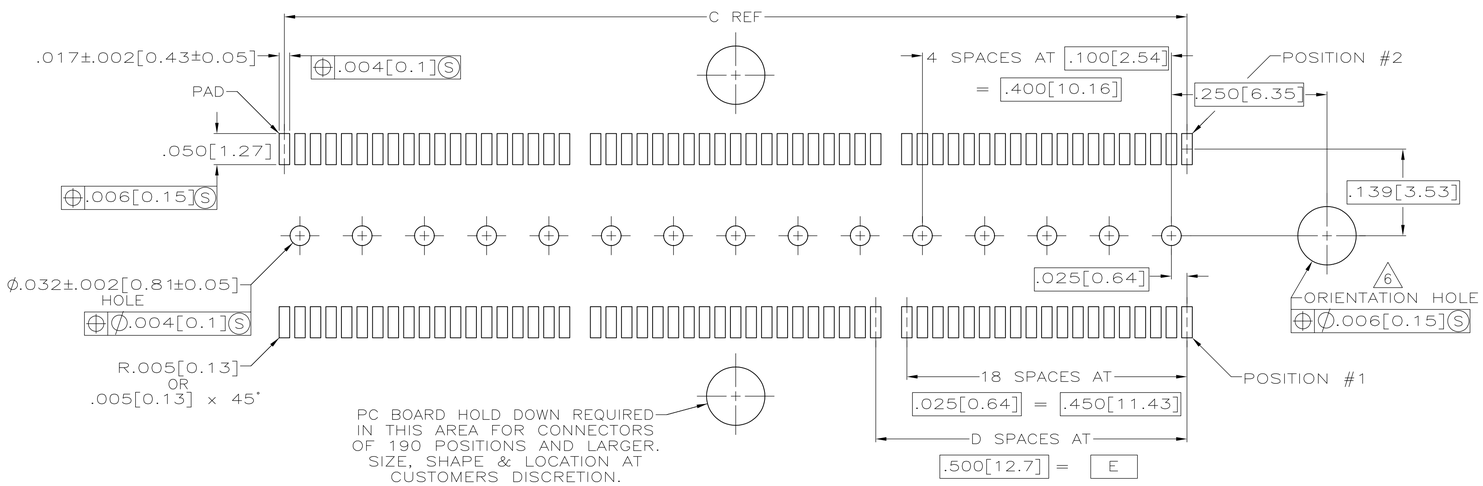

RECOMMENDED PC BOARD LAYOUT
(VIEWED FROM CONNECTOR SIDE)

	BUS LEADS TYPE	F	E	D	C	B	A	NO OF POS	PART NUMBER
	STANDARD	.060[1.52]	3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	1-5767005-4
	STANDARD	.060[1.52]	2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228	1-5767005-3
	STANDARD	.060[1.52]	2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	1-5767005-2
	STANDARD	.060[1.52]	1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	1-5767005-1
	STANDARD	.060[1.52]	1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	1-5767005-0
	STANDARD	.060[1.52]	.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	5767005-9
	STANDARD	.060[1.52]	.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	5767005-8
OBSOLETE	EXTENDED	.104[2.64]	3.000[76.2]	6	3.450[87.63]	3.898[99]	4.000[101.6]	266	5767005-7
OBSOLETE	EXTENDED	.104[2.64]	2.500[63.5]	5	2.950[74.93]	3.398[86.31]	3.500[88.9]	228	5767005-6
OBSOLETE	EXTENDED	.104[2.64]	2.000[50.8]	4	2.450[62.23]	2.898[73.61]	3.000[76.2]	190	5767005-5
OBSOLETE	EXTENDED	.104[2.64]	1.500[38.1]	3	1.950[49.53]	2.398[60.91]	2.500[63.5]	152	5767005-4
OBSOLETE	EXTENDED	.104[2.64]	1.000[25.4]	2	1.450[36.83]	1.898[48.21]	2.000[50.8]	114	5767005-3
OBSOLETE	EXTENDED	.104[2.64]	.500[12.7]	1	.950[24.13]	1.398[35.51]	1.500[38.1]	76	5767005-2
OBSOLETE	EXTENDED	.104[2.64]	.000[0]	0	.450[11.43]	.898[22.81]	1.000[25.4]	38	5767005-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005[0.13]
4 PLC ± -
ANGLES ± -

MATERIAL 1

FINISH 2

DWN	G. ATTADIA	25 OCT 04
CHK	D. DIXON	25 OCT 04
APVD	D. DIXON	25 OCT 04

TE Connectivity

NAME: PLUG ASSEMBLY, .495[12.57] VERTICAL, .025[0.64]CL, GULL WING LEADS, MICTOR

PRODUCT SPEC: 108-1422
APPLICATION SPEC: 114-11004
WEIGHT: -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5767005	-

CUSTOMER DRAWING | SCALE 8:1 | SHEET 1 OF 1 | REV A2