


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	AC1	REVISED PER ECO-14-008433		05JUN2014	NK	MZ	

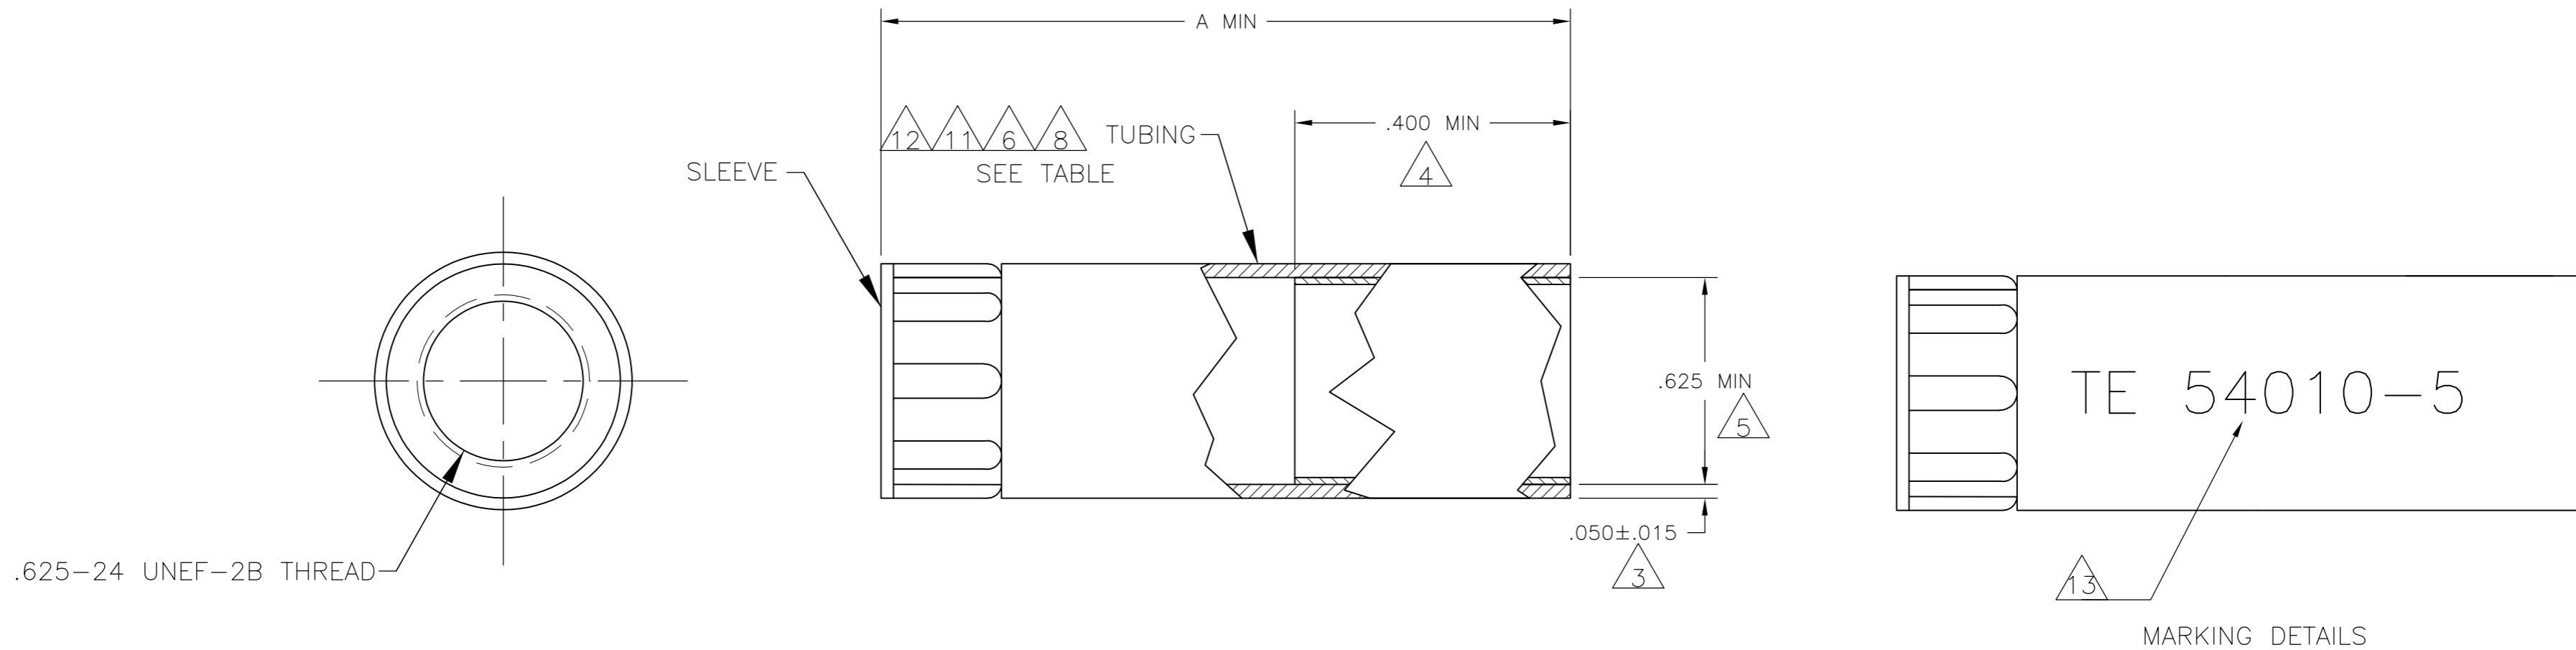

- 1 POLYOLEFIN, BLACK.
- 2 NYLON, BLACK.
- 3 NOMINAL WALL THICKNESS, EXPANDED.
- 4 LENGTH OF SEALANT.
- 5 EXPANDED INSIDE DIAMETER.
- 6 6.35[.250] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7 ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8 121°C [250°F] SHRINK TEMPERATURE.
- 9 -55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10 THIS PART WILL ACCOMODATE $\phi 6.35 - \phi 15.24$ [$\phi .250 - \phi .600$] CABLE RANGE.
- 11 4.06 [.160] MAXIMUM RECOVERED INSIDE DIAMETER.
- 12 ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 13 SEE P/N CHART FOR MARKING. WHITE CHARACTERS .150 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 14 PRELIMINARY PART - NOT FOR PRODUCTION.

TE 54010-5	6 8	2.25	14 54010-5
NONE	11 8	2.25	54010-4
NONE	6 8	1.25	54010-2
NONE	6 8	2.25	54010-1
MARKING	RECOVERED INSIDE DIS	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.REIFSNYDER	09 APR 96		TE Connectivity		
CHK	R.STONE	15 APR 95		STRAIN RELIEF ASSY, SHELL SIZE 11, CPC		
APVD	T.A.WETZEL	03 MAY 96		SIZE	CAGE CODE	DRAWING NO
PRODUCT SPEC				A2	00779	C=54010
APPLICATION SPEC			WEIGHT			
			CUSTOMER DRAWING	SCALE	2:1	
				SHEET	1 of 1	
				REV	AC1	