

PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: LR4-73XF

DOCUMENT: SCD25853
PCN: E62269
REV LETTER: D
REV DATE: MAY 9, 2011
PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 20V MAX
Current: 100A MAX
Nickel Leads: 0.125mm

Tape: Polyester(White)
35mm Width

Solder: Lead-free

Lot Marking Ink Color (Green)

Marking:

- Manufacturer's Mark
- ⊗ E7X — Part Identification
- — Lot Identification

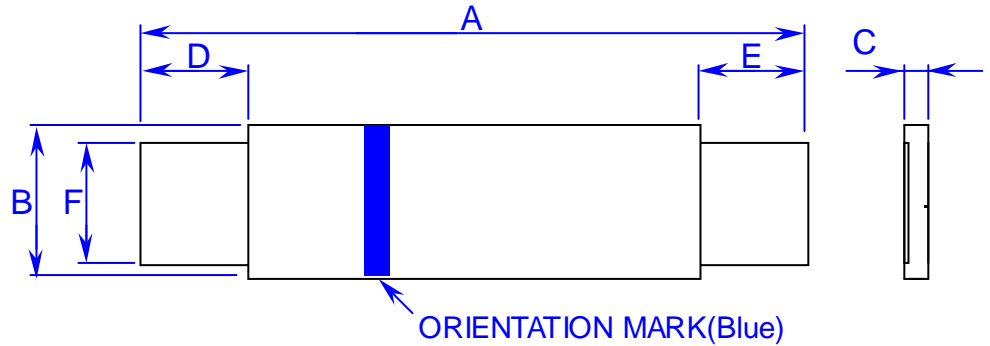


TABLE I. DIMENSIONS:

		A		B		C		D		E		G	
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:		45.4	47.6	7.9	8.5	0.6	1.0	4.6	6.2	4.6	6.2	5.9	6.1
in*:		(1.79)	(1.87)	(0.31)	(0.33)	(0.02)	(0.04)	(0.18)	(0.24)	(0.18)	(0.24)	(0.23)	(0.24)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: (As measured in Muller Kelvin clips model BU-75K.)

I HOLD	CURRENT TRIP LIMITS									TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION					
	AMPS AT 0°C		AMPS AT 20°C		AMPS AT 60°C		AMPS AT --°C		SECONDS AT 20°C, 30.0A					OHMS AT 20°C		WATTS AT 20°C, 20V		
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	TYP	MAX	MIN	MAX	MIN	MAX	TYP	MAX
	7.3	16.6	8.6	14.1	5.4	10.5	--	--	--	--	5		0.008	0.011	0.008	0.015	--	3.3

Agency Recognitions:
Reference Documents:
Precedence:
Effectivity:
CAUTION:

UL, TUV, CSA
PS300
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.