



Product Overview

Metal Hybrid PPTC (MHP) Devices

Resettable circuit protection for high-rate-discharge li-ion battery applications such as cordless power tools, e-bikes and back-up power supplies.



KEY FEATURES

- 30A hold current
- Rated at 36V_{DC}, 100A max.
- Low device resistance (< 2mOhm) compared to other breaker devices
- Able to withstand heavy vibration and impact
- Device allows easy mounting between 18650 cells

The rapidly expanding market for high-rate-discharge lithium ion (Li-ion) batteries used in applications such as cordless power tools, e-bikes and back-up power supplies has created the need for cost-effective circuit protection devices capable of providing 30A+ hold currents at voltage ratings over 30V_{DC}. To meet this need, a new hybrid device has been developed that connects a bimetal protector in parallel with a PPTC (polymeric positive temperature coefficient) device. The resulting Metal Hybrid PPTC (MHP) device helps provide resettable overcurrent protection while also utilizing the low resistance of the PPTC device to help prevent arcing in the bimetal protector at higher currents.

APPLICATIONS


- Li-ion battery packs for high-rate-discharge applications
 - Cordless power tools
 - E-bikes
 - Back-up power supplies (UPS)
 - Medical Devices
- Motor protection

BENEFITS

- Fills market need for battery protection devices rated above 30A and 30V_{DC}
- Provides resettable overcurrent and short circuit protection in Li-ion batteries
- Helps protect Li-ion cells from damage from abnormal high currents that could cause heat damage and lead to premature cell end of life and potential field returns
- Arc suppression: Current shunts to the PPTC due to its low resistance helping to suppress arcing all while helping protect the contacts from damage or welding shut
- Double make/double break contact design allows for a high current rating in a smaller device package

DESIGN CONCEPT

In normal operation, current passes through the bimetal contact due to its low contact resistance. During an abnormal event, such as a power tool rotor lock, higher current is generated in the circuit causing the bimetal contact to open and its contact resistance to increase. At this point, the current shunts to the lower resistance PPTC device which helps prevent arcing between the contacts while also heating the bimetal, keeping it open and in a latched position. This integrated design addresses the need for compact, resettable overcurrent protection devices capable of arc suppression in high current DC power applications.

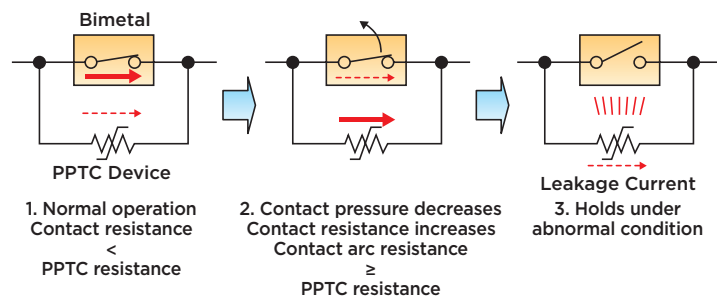


ELECTRICAL CHARACTERISTICS (TYPICAL)

Part Number	Current Trip Limits		Operating Voltage V_{MAX} (V_{DC})	Time-to-Trip		R_{Typ} (mOhms)
	I_{HOLD} @25°C (A)	I_{TRIP} @25°C (A)		100A @25°C (Seconds)	60A @25°C (Seconds)	
MHP30-36-T	30	50	36	4.5 ±1.5	17 ±10	1.6

DIMENSIONS IN MILLIMETERS

Part Number	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
MHP30-36-T	25.8	26.2	9.2	9.6	5.1	5.5	32.8	33.6	6.8	7.2	0.9	1.1

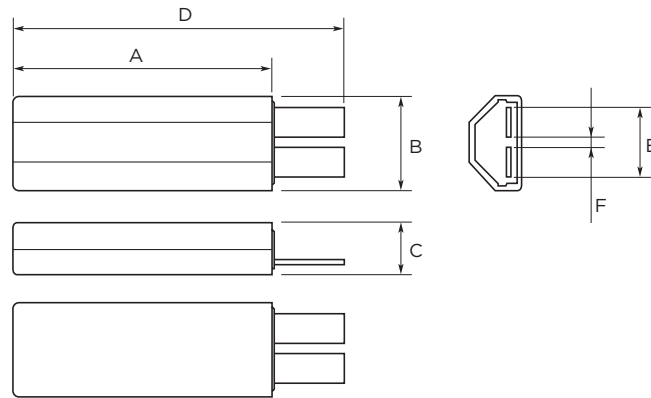

MARKING INFORMATION

TE Connectivity _____ Manufacturer's Name
 MHP30-36-T _____ Part Name
 36V_{DC}, 30A, trip @50A _____ Rated Current and Voltage
 □□□□□□ _____ Lot Identification

RATED TRIP CYCLES

DC16V, 100A (resistive) - 500 cycles
 DC36V, 100A (resistive) - 100 cycles
 (No welding of contacts)

AGENCY RECOGNITIONS

UL1077

FOR MORE INFORMATION

te.com/MHP-Launch/

TE Circuit Protection

308 Constitution Drive
Menlo Park, CA USA 94025-1164
Tel : (800) 227-7040, (650) 361-6900
Fax : (650) 361-4600
Email : RTP@TE.COM

www.circuitprotection.com
www.circuitprotection.com.hk (Chinese)
www.te.com/japan/bu/circuitprotection/ (Japanese)

Brazil

Tel : 55-11-2103-6090
Fax: 55-11-2103-6216

**UK / Eire / Benelux / Israel
South Africa / Nordic / Baltic / Others**
Tel : 49-89-6089485
Fax: 49-89-6089394

**Germany / Austria / Switzerland /
Eastern Europe / Russia**
Tel : 49-89-6089584
Fax: 49-89-6089394

**France / Italy / Iberia /
Greece / Turkey**
Tel : 33-1-34208455
Fax: 33-1-34208479

Japan

Tel : 81-44-900-5110
Fax: 81-44-900-5140

Korea

Tel : 82-2-3415-4654
Fax: 82-2-3486-1786

Taiwan

Tel : 886-2-8768-2788 x 211
Fax: 886-2-8768-1277

China, Hong Kong

Tel : 852-2738-8181
Fax: 852-2735-1185

China, Beijing

Tel : 86-10-6569-3488 x 16526
Fax: 86-10-6569-3206

China, Shanghai

Tel : 86-21-6106-7379
Fax: 86-21-6485-3255

China, Shenzhen / Guangzhou

Tel : 86-755-2515-4797
Fax: 86-755-2598-0419

Singapore / Indonesia

Tel : 65-6590-5089
Fax: 65-6481-9377

Thailand / Malaysia / Vietnam

Tel : 6-04-217-8112
Fax: 6-04-229-8177

Australia / Philippines

Tel : 63-2-988-9465
Fax: 63-2-848-0205

India

Tel : 91-80-4161-3745
Mobile : 91-99-0248-8886

te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.
RCPO097E 06/2011

TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

