
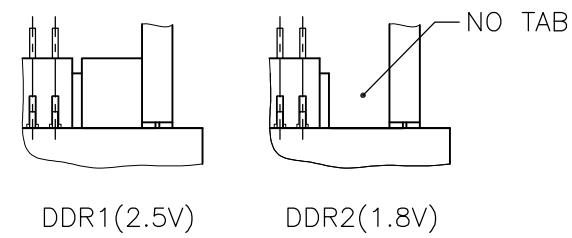


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG, 2003.

© COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC		DIST		REVISIONS					
J				P	LTR	DESCRIPTION	DATE	DWN	APVD
					D1	ECR-10-014684	22JUL10	B.W	S.Y

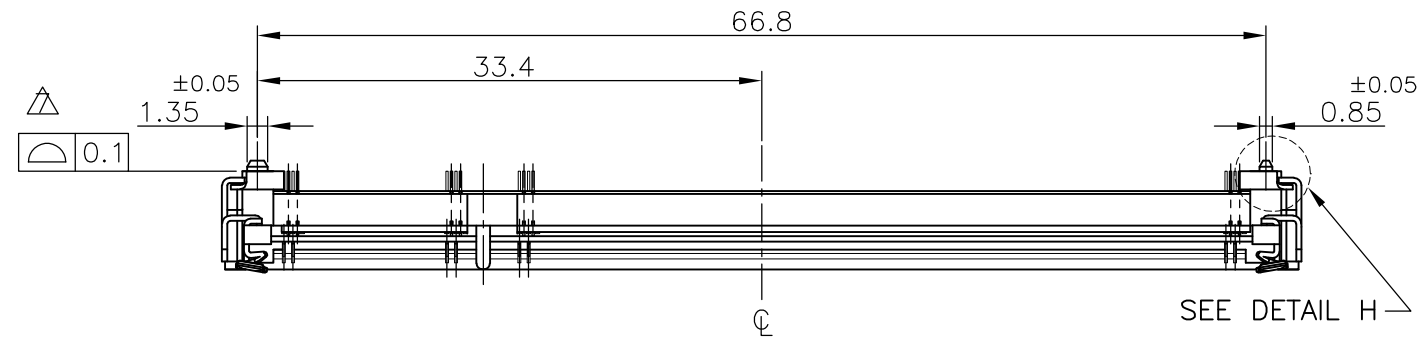

DETAIL L (SCALE 5:1)

HOW TO MATE AND UNMATE

- MATE: ① → ④
- UNMATE: ⑤ → ⑦

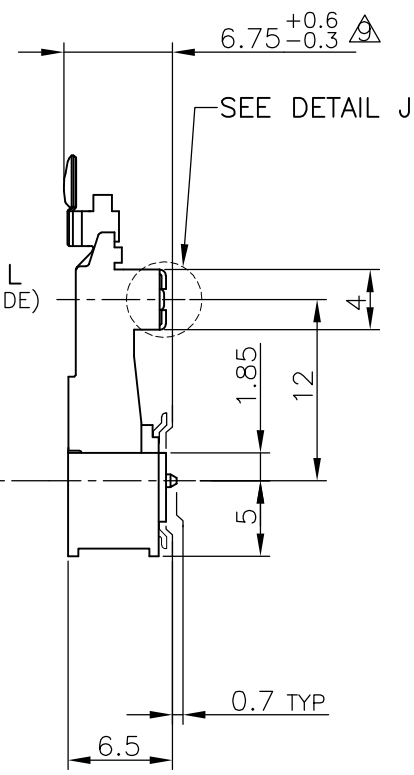
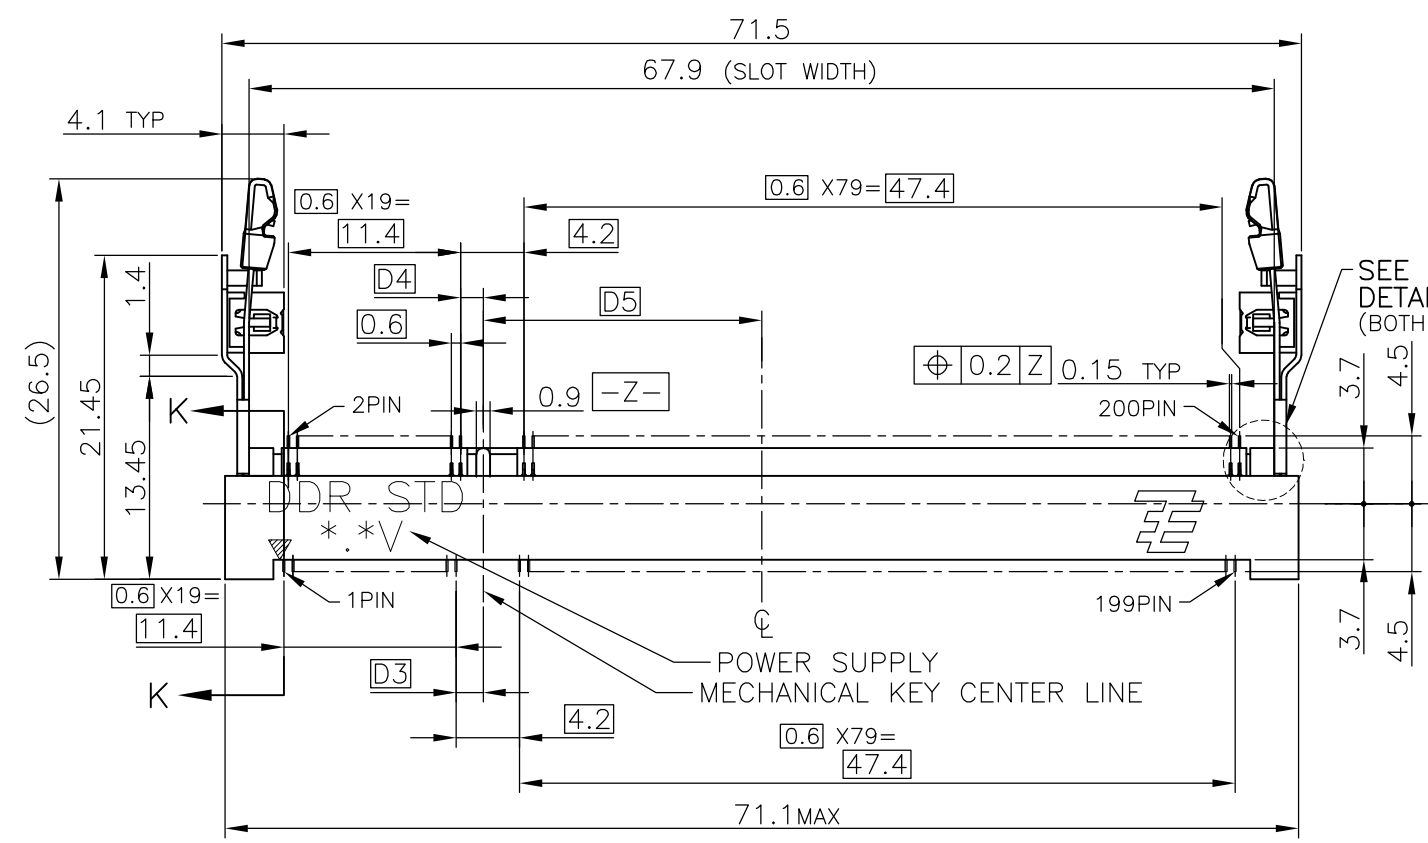
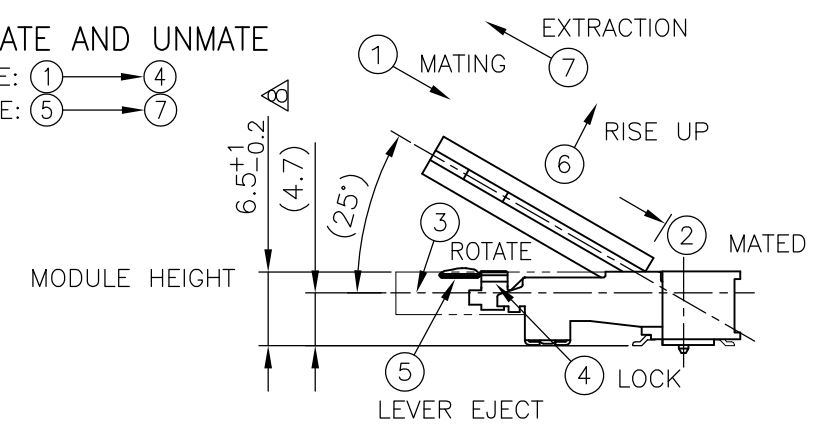


SEE DETAIL J

(APPLIED TO SHEET 1-2)

- MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
CONTACT: COPPER ARROY
LOCK LEVER: STAINLESS STEEL
SOLDER PEG: COPPER ARROY
- FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLT.
SOLDER PEG: TIN PLATING.

- ⊕ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.
- ⊕ TOLERANCES NON-CUMULATIVE.
- ⊕ NOT TO SCALE.
- ⊕ [] INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.
- ⊕ COPLANARITY : 0.1 MAX.
- ⊕ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.
- ⊕ NOT MATING CONDITION.
- 10 IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY, OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE INSERTED AND LOCKED IN THE LATCH.

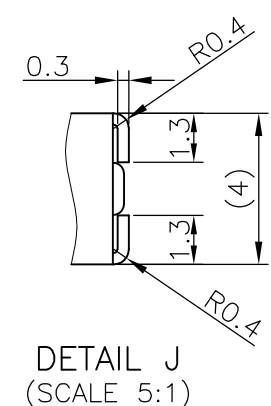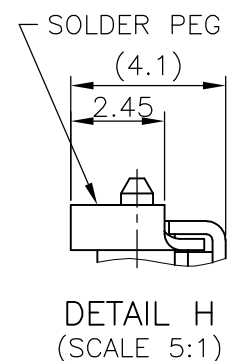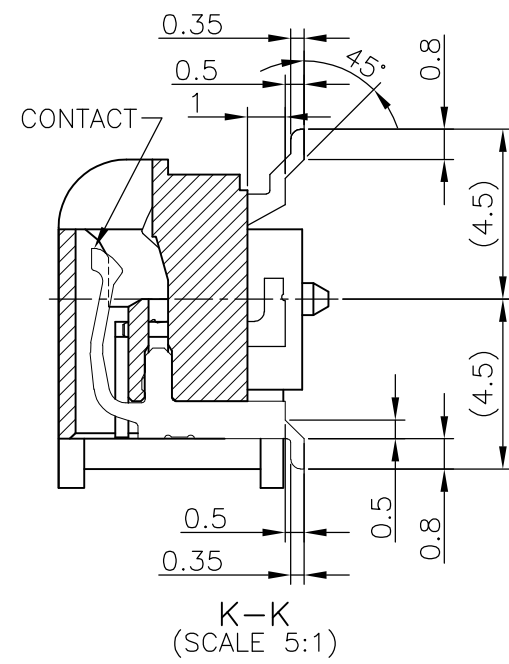


GENERAL TOLERANCE
 10 ≥ : ±0.2
 30 ≥ > 10: ±0.25
 100 ≥ > 30: ±0.3
 ANGLES: ±3°

AVAILABLE	—H—	1.8V (DDR2)	17.55	2.4	2.7	200	1717468-4
AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1717468-3
TOOLING STATUS	REMARKE	POWE SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.FUMIKURA 22AUG03	Tyco Electronics AMP K.K. Kawasaki, Japan				
DIMENSIONS: MM		CHK T.KUSUHARA 22AUG03					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H.MURAMATSU 22AUG03					
0 PLC ±		NAME					
1 PLC ±		PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET				
2 PLC ±		APPLICATION SPEC	0.6mm PITCH 200POS				
3 PLC ±		WEIGHT	6.5 HEIGHT STANDARD TYPE				
4 PLC ±		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
ANGLES ±		SCALE	A3	00779	C-1717468	2:1	
FINISH		SHEET	1		OF	4	
		REV					D1

LOC	DIST
J	


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

REFERENCE P.C.BOARD PATTERN LAYOUT (CONNECTOR MOUNTING SIDE)

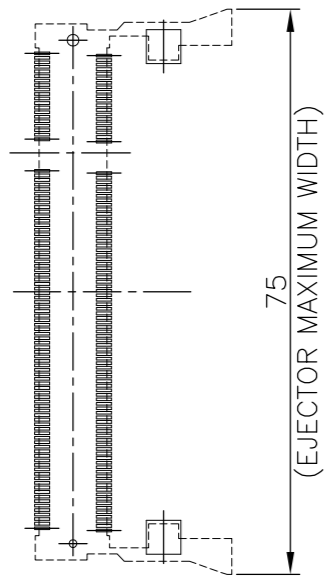

75
(EJECTOR MAXIMUM WIDTH)

REAL SIZE (SCALE 1:1)



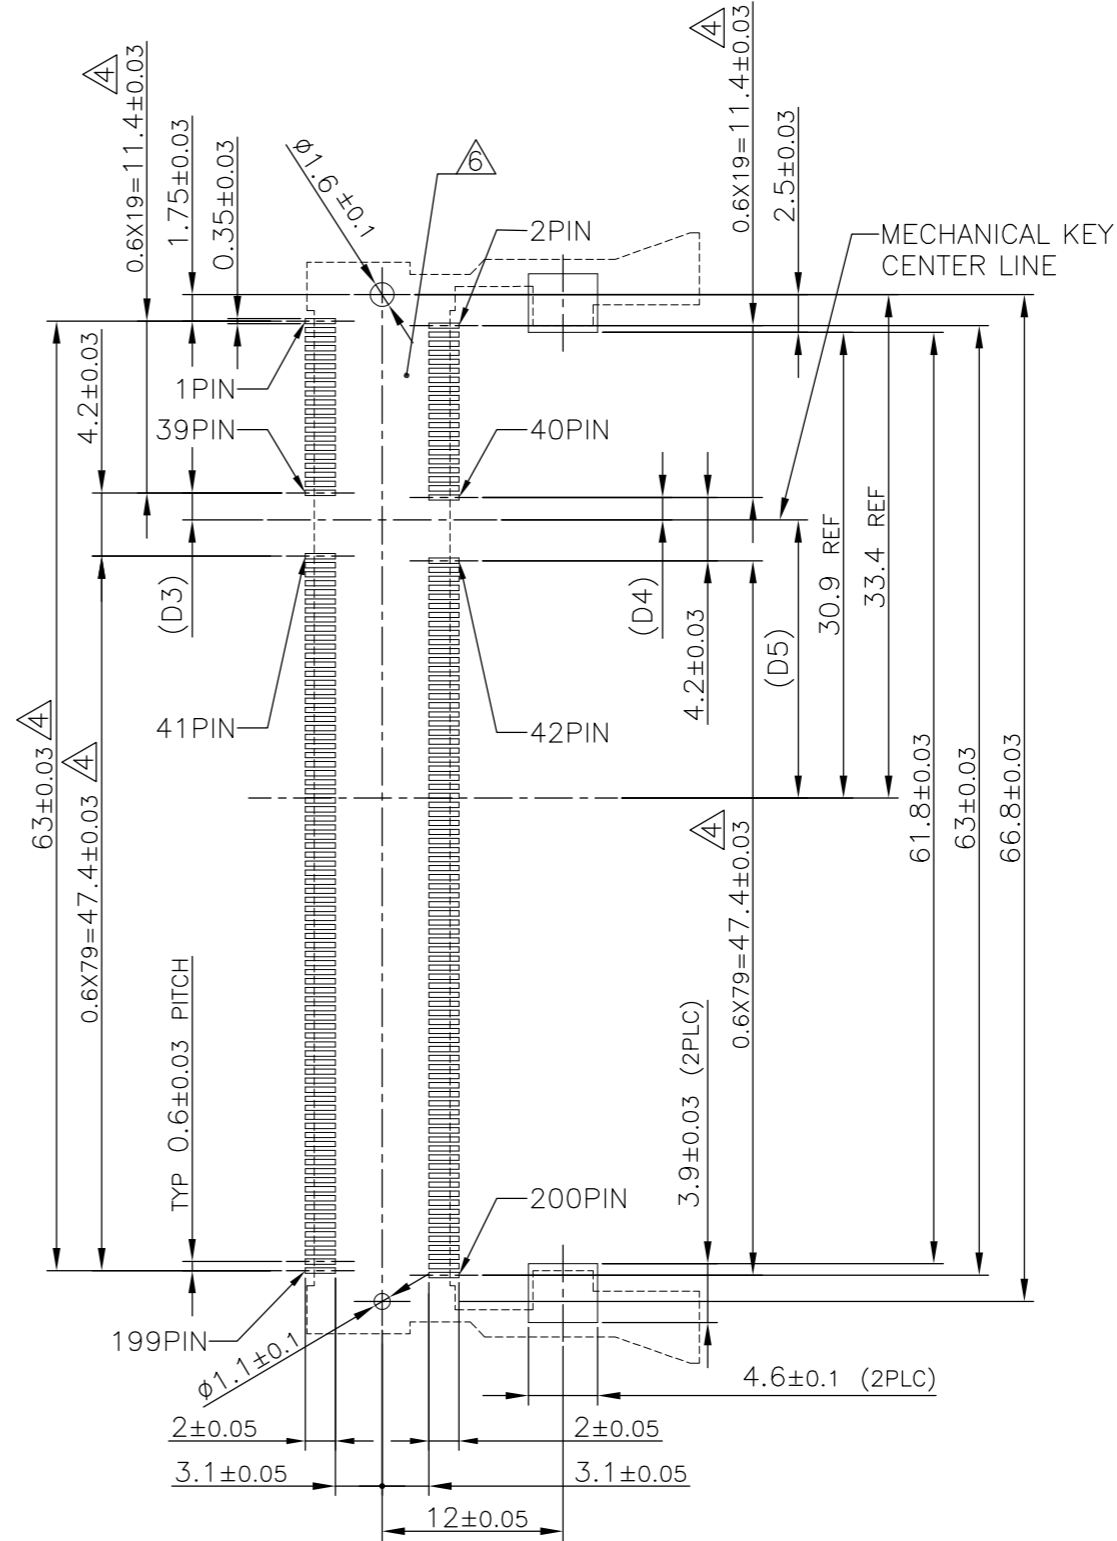


1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Kawasaki, Japan	
DIMENSIONS: MM		CHK	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	DDR1 & DDR2 SODIMM SOCKET	
0 PLC ±		PRODUCT SPEC	0.6mm PITCH 200POS	
1 PLC ±		APPLICATION SPEC	6.5 HEIGHT STANDARD TYPE	
2 PLC ±		WEIGHT	SIZE	CAGE CODE
3 PLC ±		CUSTOMER DRAWING	A3	00779
4 PLC ±			DRAWING NO	C-1717468
ANGLES ±		SCALE	RESTRICTED TO	
FINISH		2:1	SHEET 2 OF 4	
MATERIAL		REV		D1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2003.
 © COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J		SEE SHEET 1	-	-	-

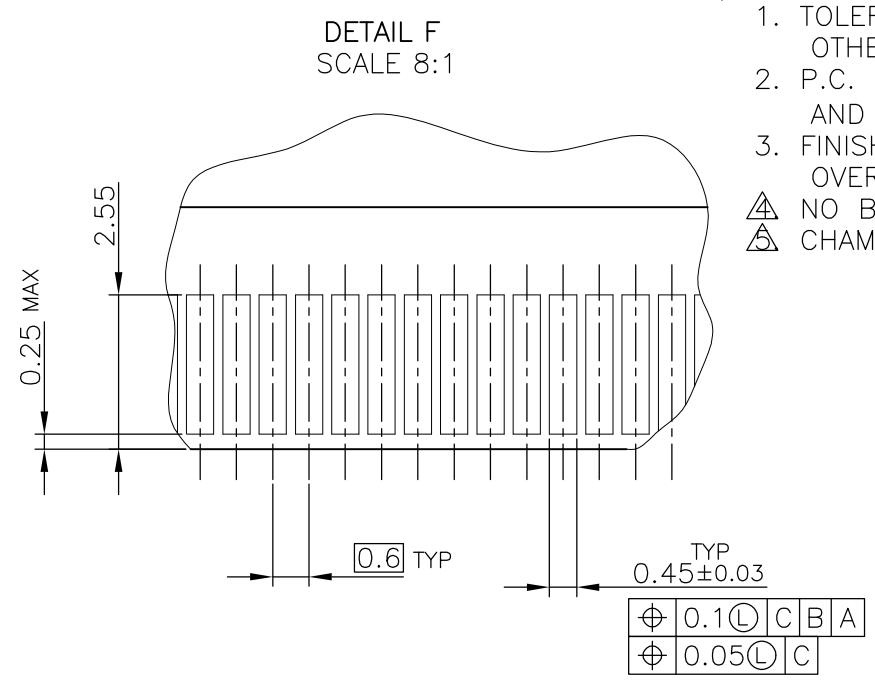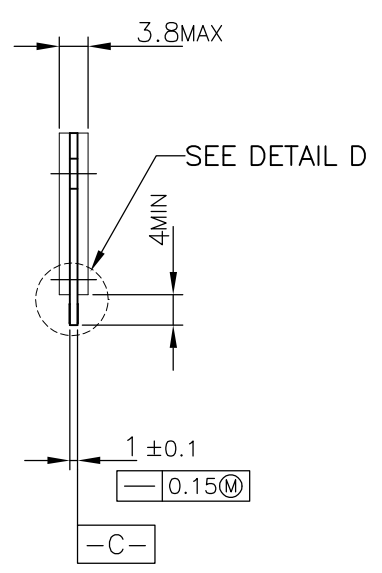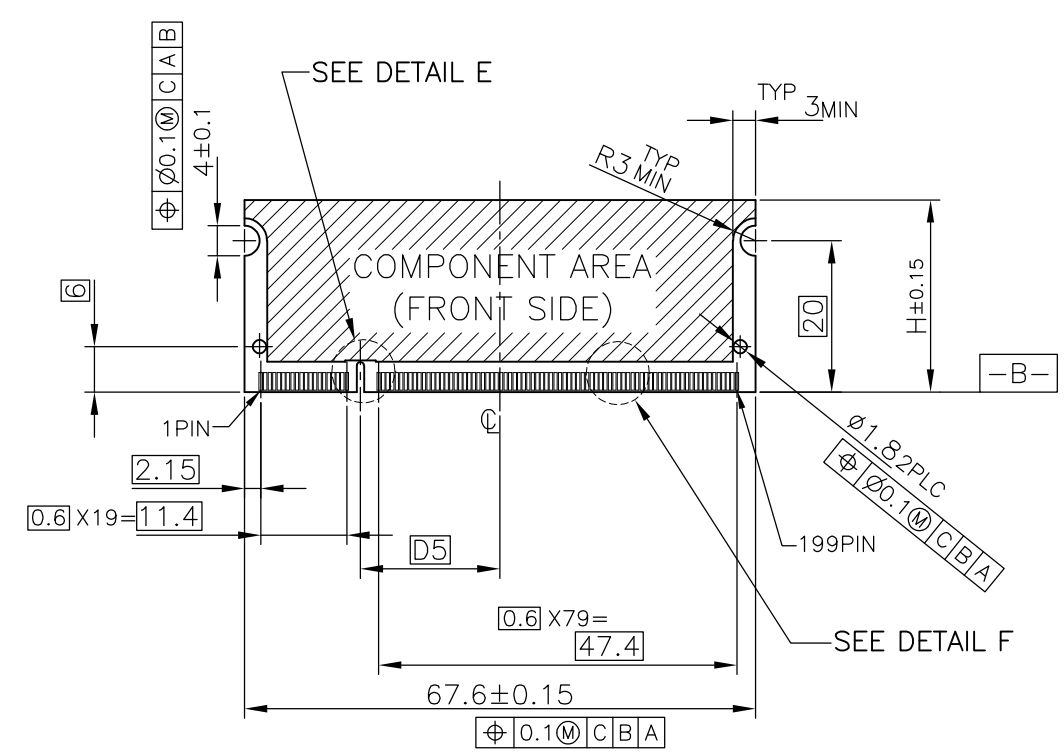

- (APPLIED TO SHEET 3)
1. TOLERANCES ON ALL DIMENSIONS ±0.15 UNLESS OTHERWISE SPECIFIED.
 2. P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
 3. FINISH OF PAD : GOLD PLATING 0.00076 MIN. OVER Ni PLATING 0.002MIN.
- ⚠ NO BURR
- ⚠ CHAMFER 0.25 MAX x 45° IF EXIST.

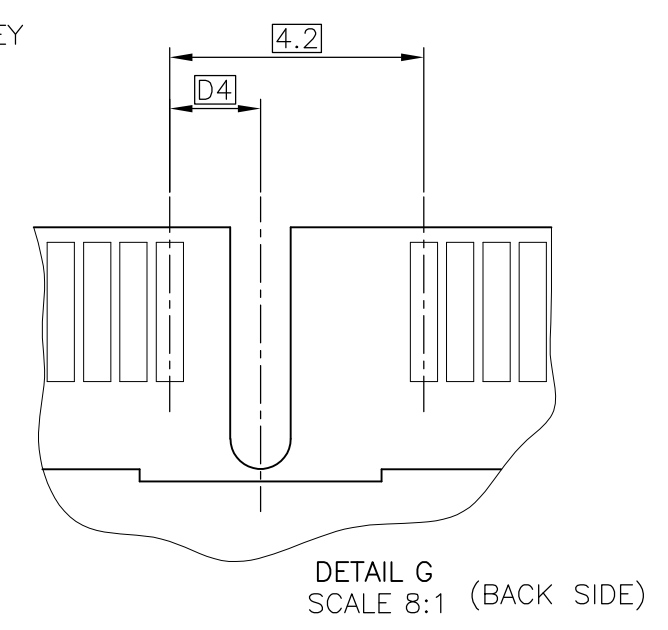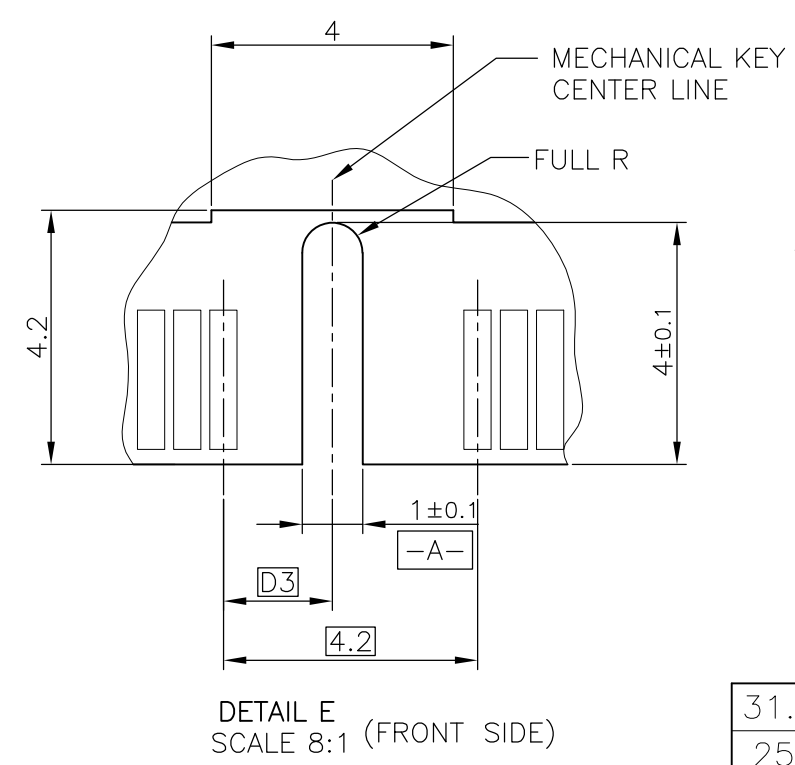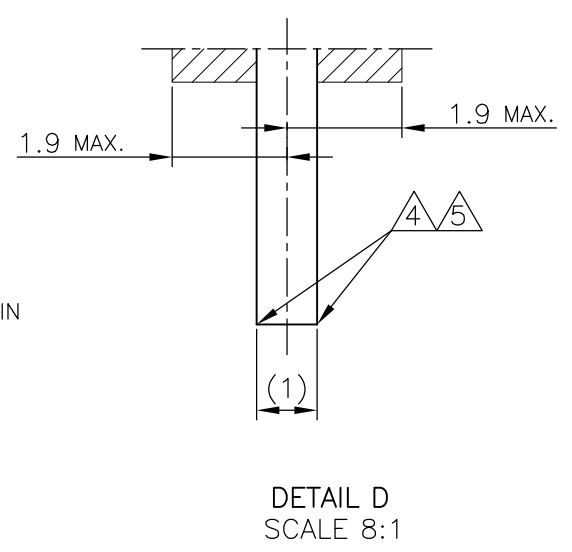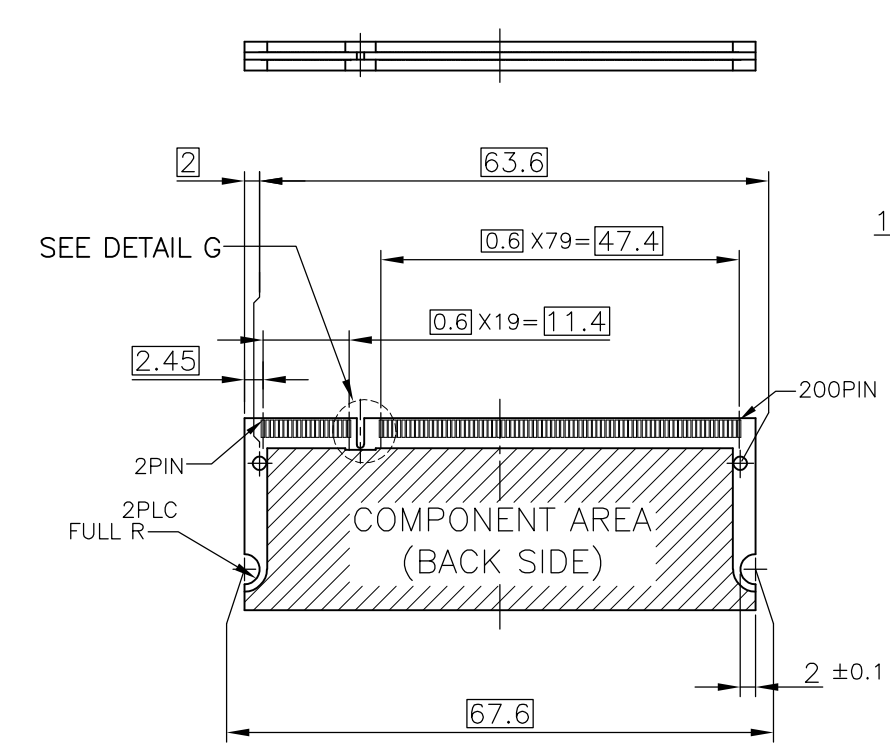



推奨基板仕様
 RECOMMENDED MATING P.C.B CONFIGURATION

31.75	1.8V	17.55	2.4	2.7
25.4	2.5V	18.45	1.5	1.8
H	POWER SUPPLY	D5	D4	D3


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics AMP K.K. Kawasaki, Japan		
DIMENSIONS: MM		CHK			
		APVD			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		NAME			
MATERIAL		PRODUCT SPEC	DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS 6.5 HEIGHT STANDARD TYPE		
		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	A3 00779 C-1717468		
		CUSTOMER DRAWING	SCALE	SHEET	REV
			2:1	3 OF 4	D1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG ,2003.
 © COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J		SEE SHEET 1	-	-	-

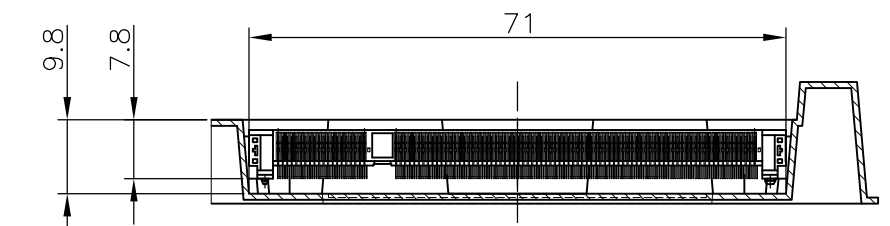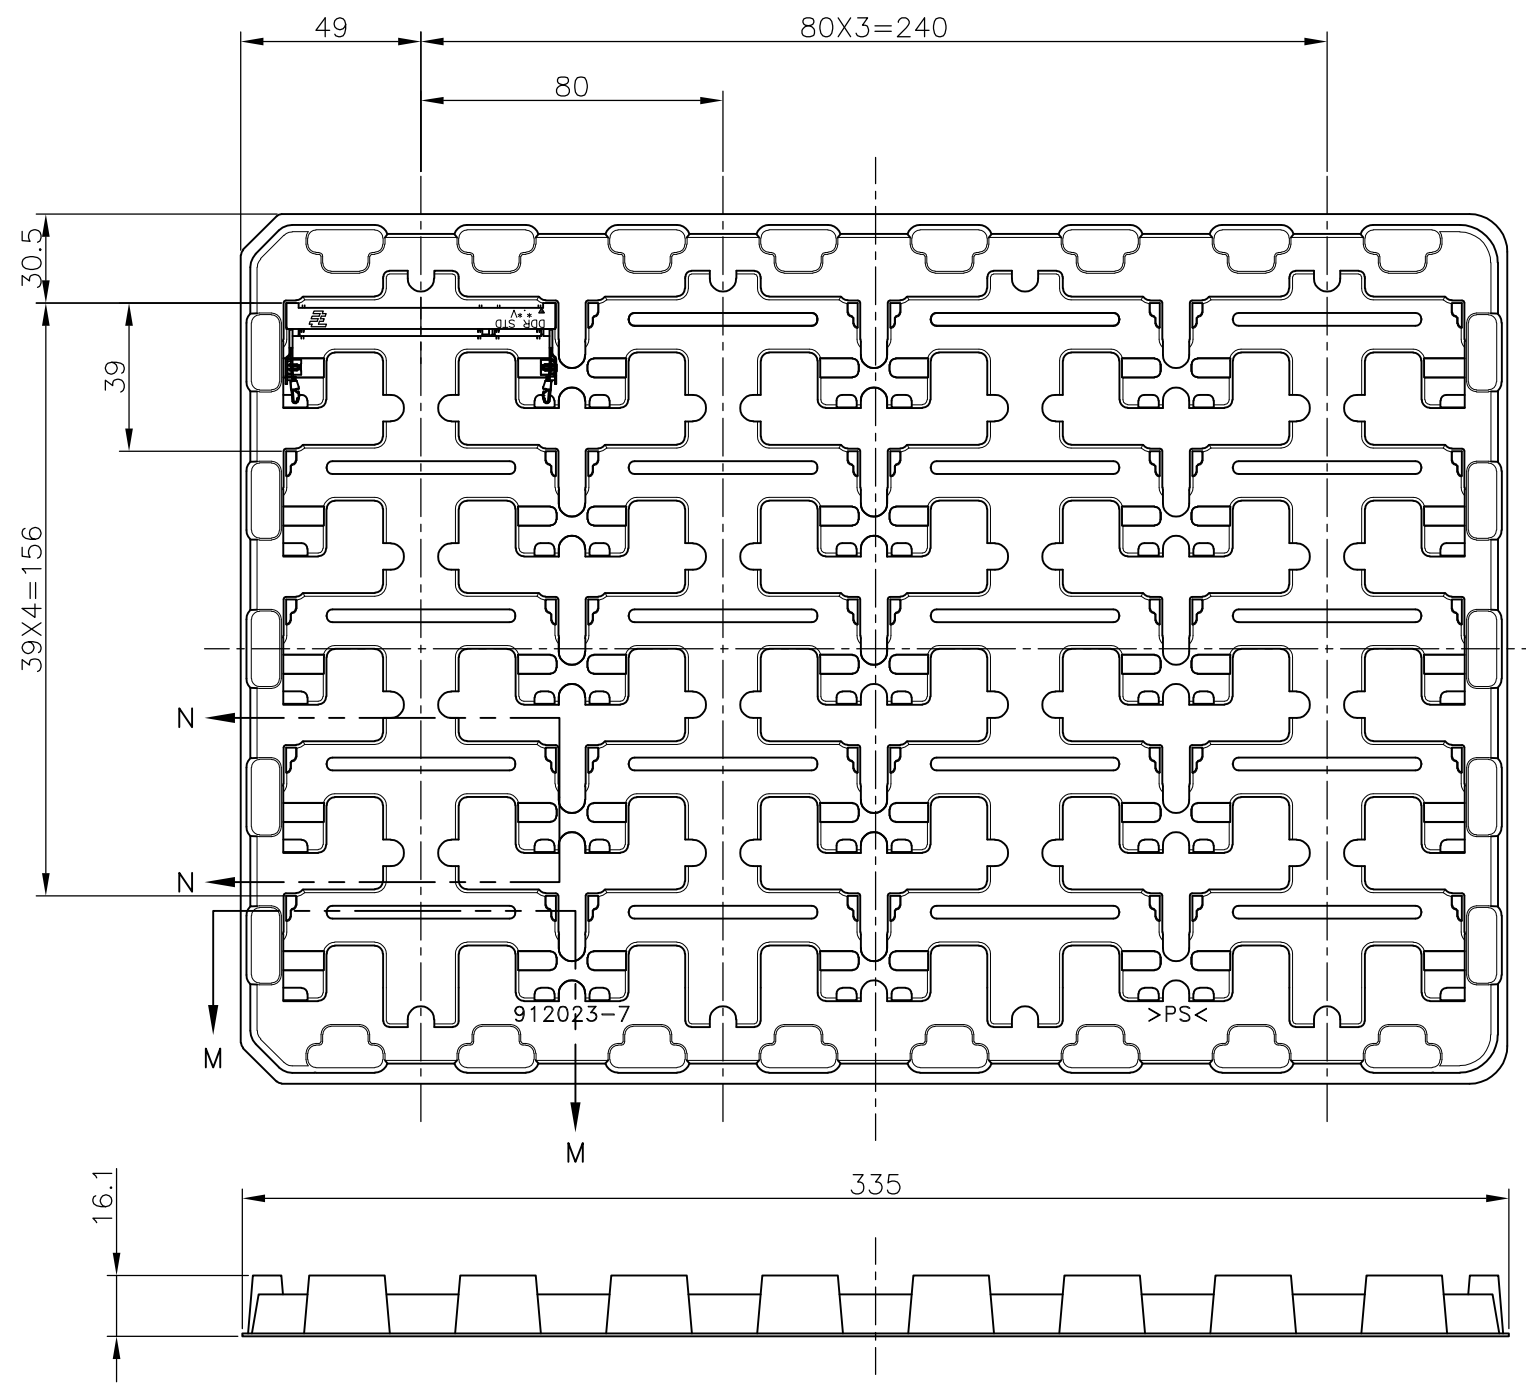

M-M
SCALE 1:1
(180DEG. ROTATE)



N-N
SCALE 1:1

1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
2. GENERAL TOLERANCE: ±0.5

20EA/TRAY	1717468-4
20EA/TRAY	1717468-3
QTY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		APVD		NAME	
MATERIAL		PRODUCT SPEC		DDR1 & DDR2 SODIMM SOCKET	
		APPLICATION SPEC		0.6mm PITCH 200POS	
		WEIGHT		6.5 HEIGHT STANDARD TYPE	
		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		A3	00779	C-1717468	
CUSTOMER DRAWING		SCALE	SHEET	OF	REV
		1:2	4	4	D1