

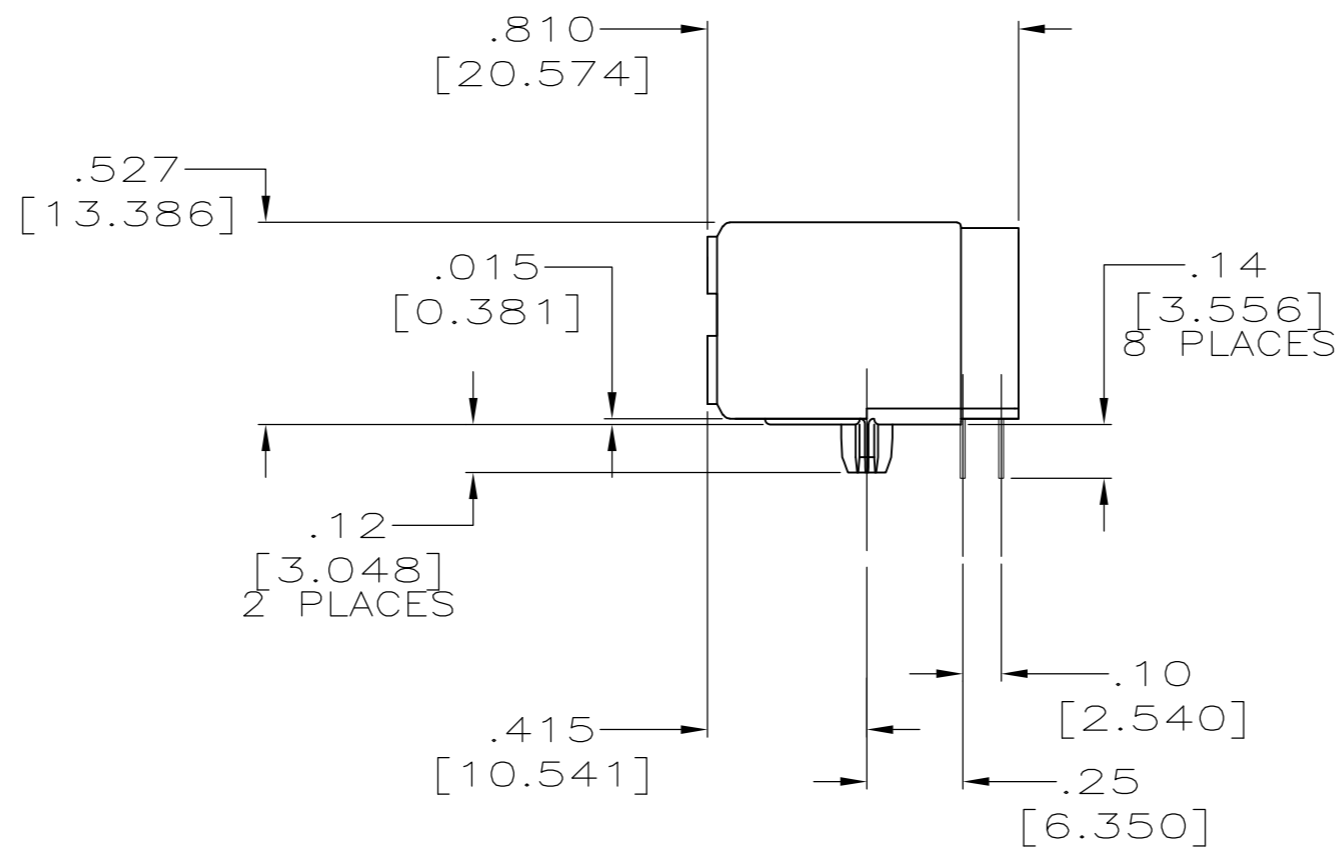
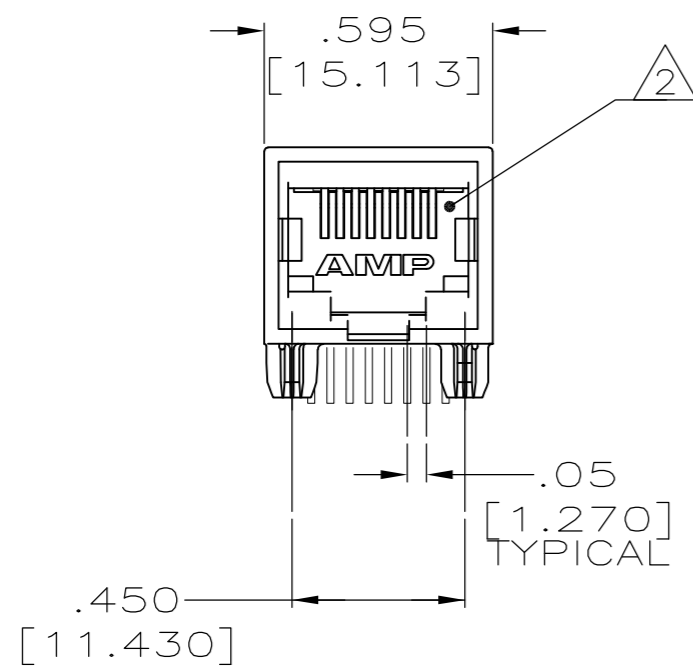


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AA	22	A1		REVISED PER ECO-11-005033	28MAR11	RK	HMR

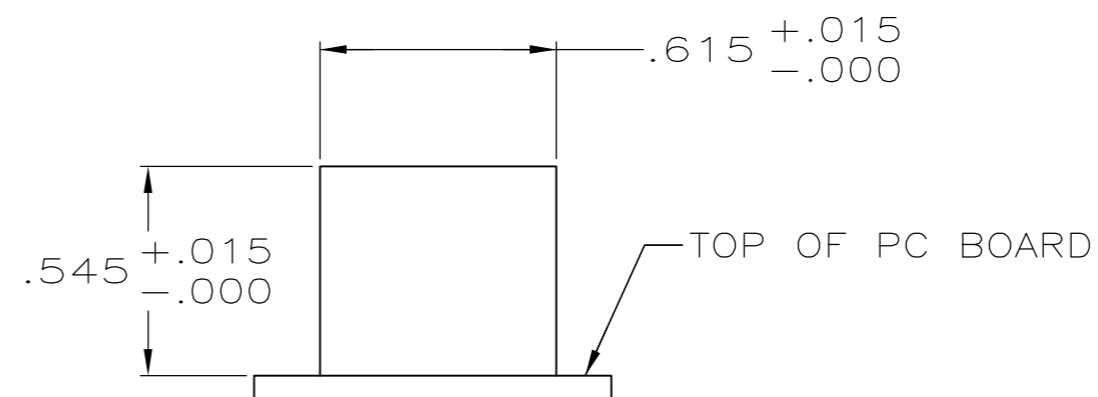

- MATERIAL: HOUSING - HTN NYLON, BLACK, REFLOW COMPATIBLE, UL 94V-0. TERMINALS-.013[0.33] THICK PHOS BRONZE PLATED WITH .000050[1.27μm] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND .000150 [3.81μm] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER .000050[1.27μm] MINIMUM THICK NICKEL UNDERPLATE.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- ALL DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- ALL DIMENSIONS SHOWN IN BRACKETS [] ARE IN MILLIMETERS.
- USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

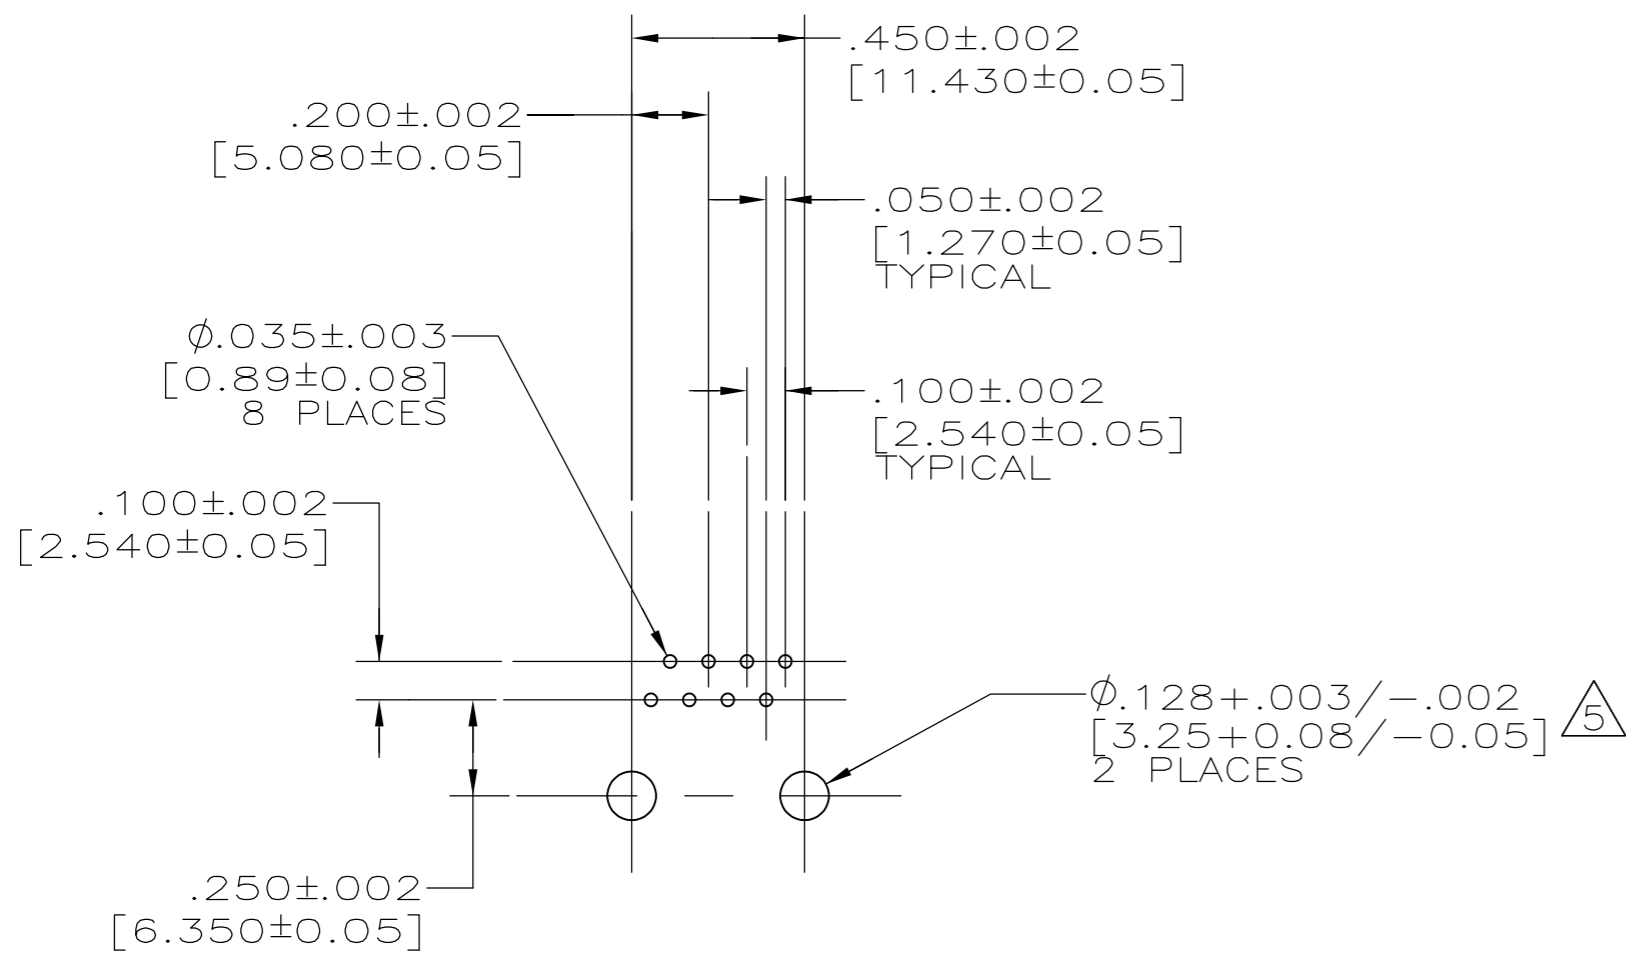

SUGGESTED PANEL CUTOUT

SUGGESTED PC BOARD LAYOUT COMPONENT SIDE

5557785-1
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V. SLACK/L.A.MAYER 01JUNE2005														
DIMENSIONS: INCHES		CHK J.WESTMAN 01JUNE2005														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.FLICKINGER 01JUNE2005	NAME MODULAR JACK ASSEMBLY, 8 POSITION,RIGHT ANGLE, LOW PROFILE													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± .01[0.254]</td></tr> <tr><td>3 PLC</td><td>± .005[0.127]</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± .01[0.254]	3 PLC	± .005[0.127]	4 PLC	± -	ANGLES	± -	PRODUCT SPEC 108-1163	SIZE A2	CAGE CODE 00779
0 PLC	± -															
1 PLC	± -															
2 PLC	± .01[0.254]															
3 PLC	± .005[0.127]															
4 PLC	± -															
ANGLES	± -															
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1	DRAWING NO 114-2048	DRAWING NO C=5557785												
		WEIGHT -	SCALE 2:1	SHEET 1 of 1												
		CUSTOMER DRAWING	REV A1													