
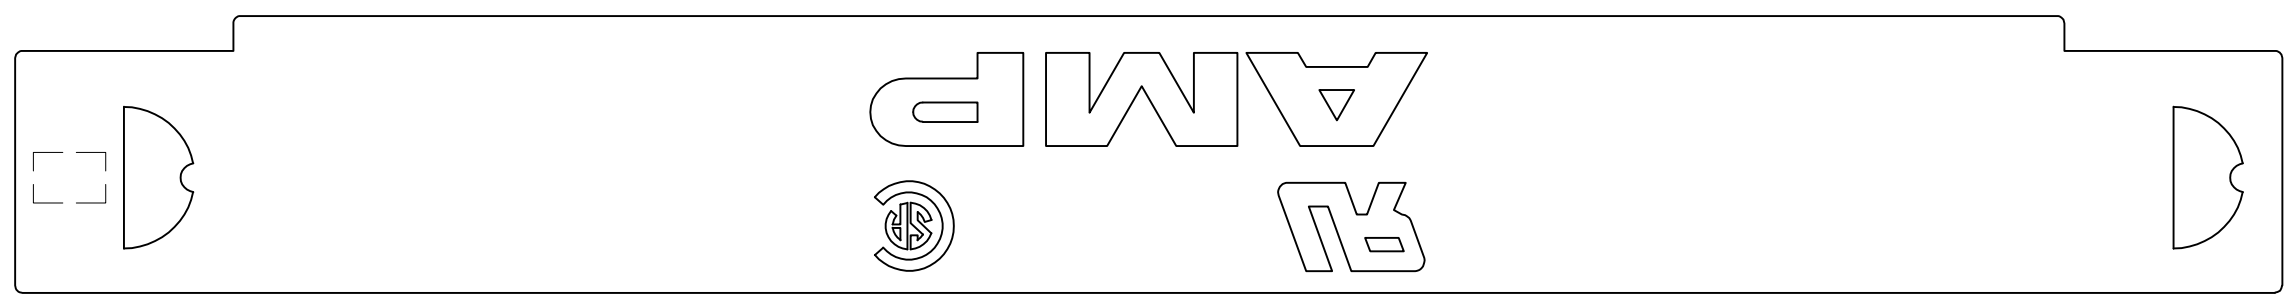
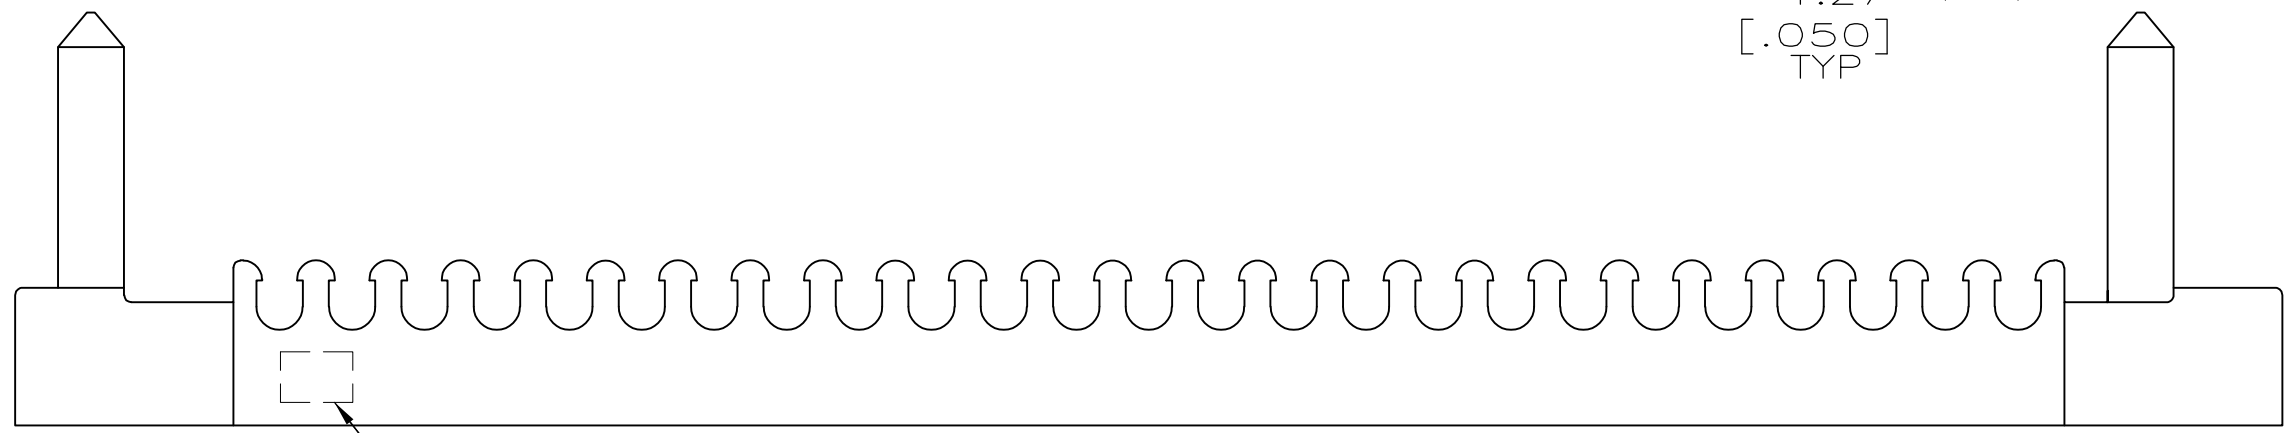


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| | | | | | | | |
|-----|------|-----------|-----|---------------------------|-----------|-----|------|
| LOC | DIST | REVISIONS | | | | | |
| GP | 00 | P | LTR | DESCRIPTION | DATE | OWN | APVD |
| | | E | | REVISED PER ECO-14-009463 | 02JUL2014 | AP | SB |

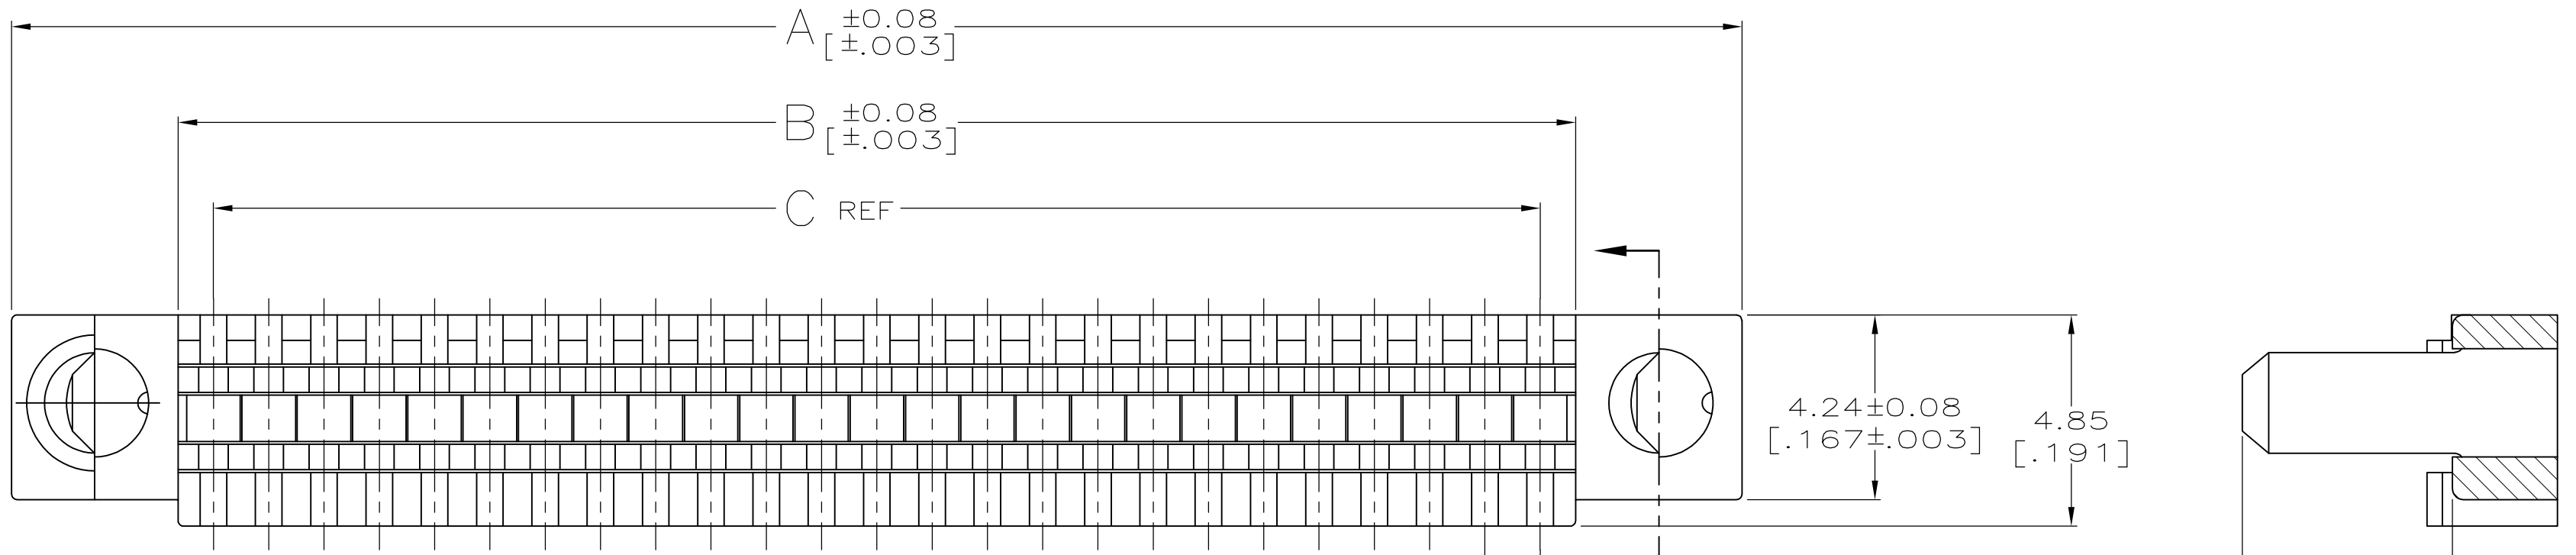

- ① NYLON OR POLYESTER, UL 94V-0 RATED, COLOR: SEE TABLE.
- ② RECOMMENDED WIRE: 28 AWG OR 30 AWG SOLID OR 7 STRAND. SEE TABLE FOR INSULATION DIA. WIRE MUST BE APPROVED BY AMP INC.
- ③ TWO COVERS REQUIRED PER CONNECTOR ASSEMBLY.
- ④ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | | | | | | | | | | | | |
|------------|----------------|-------------|-------|------------|-------|---------|--------|---------|--------|---------|-----|------------|-------------|
| | 0.74-0.79 | [.029-.031] | GRAY | 2 | 62.23 | [2.450] | 63.86 | [2.514] | 71.50 | [2.815] | 100 | 1-750877-9 | |
| | 0.74-0.79 | [.029-.031] | GRAY | 2 | 41.91 | [1.650] | 43.54 | [1.714] | 51.18 | [2.015] | 68 | 1-750877-7 | |
| | 0.74-0.79 | [.029-.031] | GRAY | 2 | 30.48 | [1.200] | 32.11 | [1.264] | 39.75 | [1.565] | 50 | 1-750877-5 | |
| ④ OBSOLETE | 0.74-0.79 | [.029-.031] | GRAY | 2 | 24.13 | [.950] | 25.76 | [1.014] | 33.40 | [1.315] | 40 | 1-750877-4 | |
| | 0.74-0.79 | [.029-.031] | GRAY | 2 | 15.24 | [.600] | 16.87 | [.664] | 24.51 | [.965] | 26 | 1-750877-2 | |
| ④ OBSOLETE | 0.81-0.91 | [.032-.036] | BLACK | 1 | 62.23 | [2.450] | 63.86 | [2.514] | 71.50 | [2.815] | 100 | 750877-9 | |
| OBSOLETE | 0.81-0.91 | [.032-.036] | BLACK | 1 | 49.53 | [1.950] | 51.156 | [2.014] | 58.801 | [2.315] | 80 | 750877-8 | |
| | 0.81-0.91 | [.032-.036] | BLACK | 1 | 41.91 | [1.650] | 43.54 | [1.714] | 51.18 | [2.015] | 68 | 750877-7 | |
| | 0.81-0.91 | [.032-.036] | BLACK | 1 | 30.48 | [1.200] | 32.11 | [1.264] | 39.75 | [1.565] | 50 | 750877-5 | |
| ④ OBSOLETE | 0.81-0.91 | [.032-.036] | BLACK | 1 | 24.13 | [.950] | 25.76 | [1.014] | 33.40 | [1.315] | 40 | 750877-4 | |
| | 0.81-0.91 | [.032-.036] | BLACK | 1 | 15.24 | [.600] | 16.87 | [.664] | 24.51 | [.965] | 26 | 750877-2 | |
| | WIRE OUTER DIA | ② | COLOR | PART ID NO | C | | | B | | A | | NO OF POSN | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|--|-------------|----------|---|
| DWN | B. MCMASTER | 14JUNE04 | TE Connectivity COVER, TERMINATING, DISCRETE WIRE, AMPLIMITE |
| CHK | S. SHUEY | 14JUNE04 | |
| APVD | M. WALMSLEY | 14JUNE04 | |
| NAME | M. WALMSLEY | | |
| DIMENSIONS: 單位: 英吋 mm[INCHES] | | | PRODUCT SPEC 製品規格 APPLICATION SPEC 取付適用規格 |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - | | | SIZE CAGE CODE DRAWING NO 單號 A2 00779 G-750877 |
| MATERIAL 材料 ① | | | WEIGHT - CUSTOMER DRAWING |
| | | | RESTRICTED TO - SCALE 尺度 8:1 SHEET 1 OF 1 REV E |