THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| AF | 50 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | AB1 | REVISED PER ECO-11-004820 | 11MAR11 | RK | HMR |
| | AB2 | REVISED PER ECR-14-016482 | 04NOV14 | L.P | T.D |

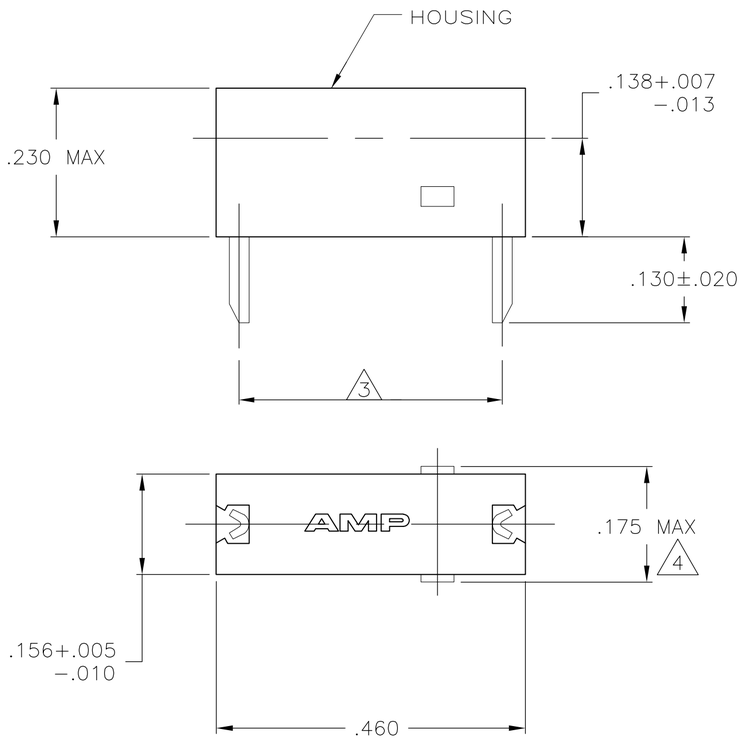


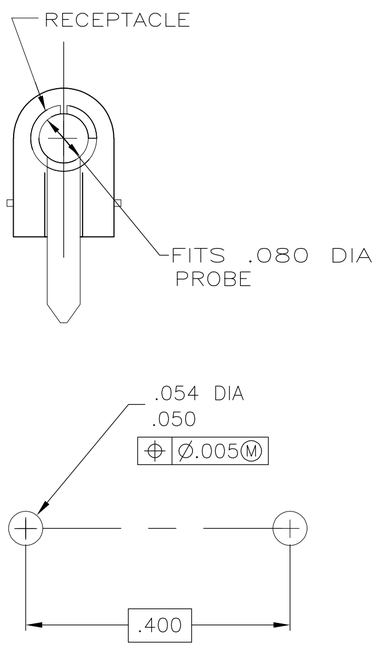


RECOMMENDED MOUNTING HOLE PATTERN

1 OPERATION TEMPERATURE IS 105° C MAX.

2 RETENTION FORCE – 16 OUNCES MIN INITALLY.
6 OUNCES MIN AFTER 500 CYCLES.

3 REFER TO MOUNTING HOLE PATTERN.

4 .175 MAX TO BE MEASURED ACROSS THE CUT-OFF TABS.

| | HOUSING – MATERAL; COLOR | RECEPTACLE – MATERIAL; FINISH | PART NUMBER |
|---|---|---|---|
| | NYLON 6/6; WHITE | BRASS – GOLD | 3-582118-9 |
| OBSOLETE | NYLON 6/6; GRAY | BRASS – GOLD | 3-582118-8 |
| | NYLON 6/6; VIOLET | BRASS – GOLD | 3-582118-7 |
| | NYLON 6/6; BLUE | BRASS – GOLD | 3-582118-6 |
| | NYLON 6/6; GREEN | BRASS – GOLD | 3-582118-5 |
| | NYLON 6/6; YELLOW | BRASS – GOLD | 3-582118-4 |
| | NYLON 6/6; ORANGE | BRASS – GOLD | 3-582118-3 |
| | NYLON 6/6; RED | BRASS – GOLD | 3-582118-2 |
| OBSOLETE | NYLON 6/6; BROWN | BRASS – GOLD | 3-582118-1 |
| | NYLON 6/6; BLACK | BRASS – GOLD | 3-582118-0 |
| | NYLON 6/6; WHITE | BRASS – SILVER | 2-582118-9 |
| OBSOLETE | NYLON 6/6; GRAY | BRASS – SILVER | 2-582118-8 |
| OBSOLETE | NYLON 6/6; VIOLET | BRASS – SILVER | 2-582118-7 |
| | NYLON 6/6; BLUE | BRASS – SILVER | 2-582118-6 |
| OBSOLETE | NYLON 6/6; GREEN | BRASS – SILVER | 2-582118-5 |
| OBSOLETE | NYLON 6/6; YELLOW | BRASS – SILVER | 2-582118-4 |
| OBSOLETE | NYLON 6/6; ORANGE | BRASS – SILVER | 2-582118-3 |
| | NYLON 6/6; RED | BRASS – SILVER | 2-582118-2 |
| OBSOLETE | NYLON 6/6; BROWN | BRASS – SILVER | 2-582118-1 |
| | NYLON 6/6; BLACK | BRASS – SILVER | 2-582118-0 |
| | NYLON 6/6; WHITE | BRASS – TIN | 1-582118-9 |
| OBSOLETE | NYLON 6/6; GRAY | BRASS – TIN | 1-582118-8 |
| OBSOLETE | NYLON 6/6; VIOLET | BRASS – TIN | 1-582118-7 |
| OBSOLETE | NYLON 6/6; BLUE | BRASS – TIN | 1-582118-6 |
| | NYLON 6/6; GREEN | BRASS – TIN | 1-582118-5 |
| | NYLON 6/6; YELLOW | BRASS – TIN | 1-582118-4 |
| OBSOLETE | NYLON 6/6; ORANGE | BRASS – TIN | 1-582118-3 |
| OBSOLETE | NYLON 6/6; RED | BRASS – TIN | 1-582118-2 |
| OBSOLETE | NYLON 6/6; BROWN | BRASS – TIN | 1-582118-1 |
| OBSOLETE | NYLON 6/6; BLACK | BRASS – TIN | 1-582118-0 |

| | HOUSING – MATERAL; COLOR | RECEPTACLE – MATERIAL; FINISH | PART NUMBER |
|---|---|---|---|
| | – | – | – |
| | – | – | – |
| | – | – | – |
| | NYLON 6/6; NATURAL | BRASS – GOLD | 6-582118-9 |
| OBSOLETE | NYLON 6/6; NATURAL | BRASS – SILVER | 5-582118-9 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± .015
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN M.S. FEHER 13APR2004
CHK E. HOWARD 13APR2004
APVD E. HOWARD 13APR2004
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME ASSEMBLY, TEST PROBE – –

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-582118 | – |

CUSTOMER DRAWING | SCALE 6:1 | SHEET 1 OF 1 | REV AB2

582118

1471-9 (3/11)