
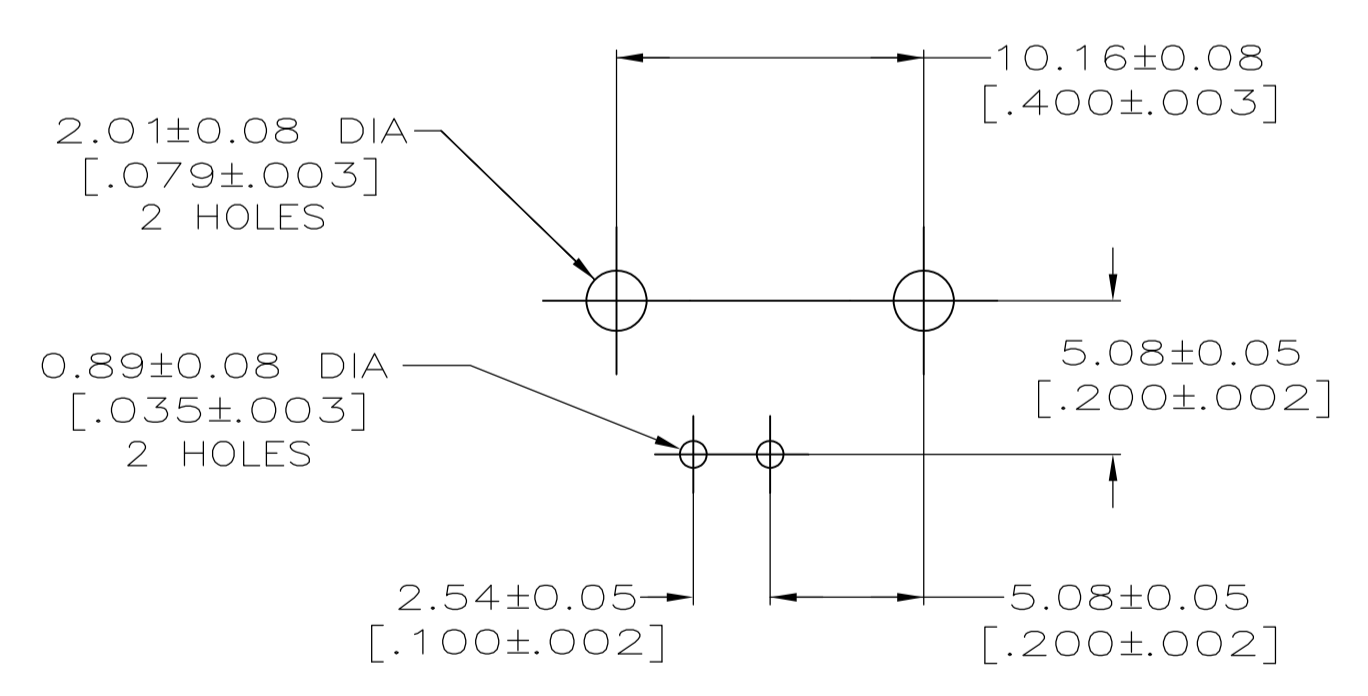
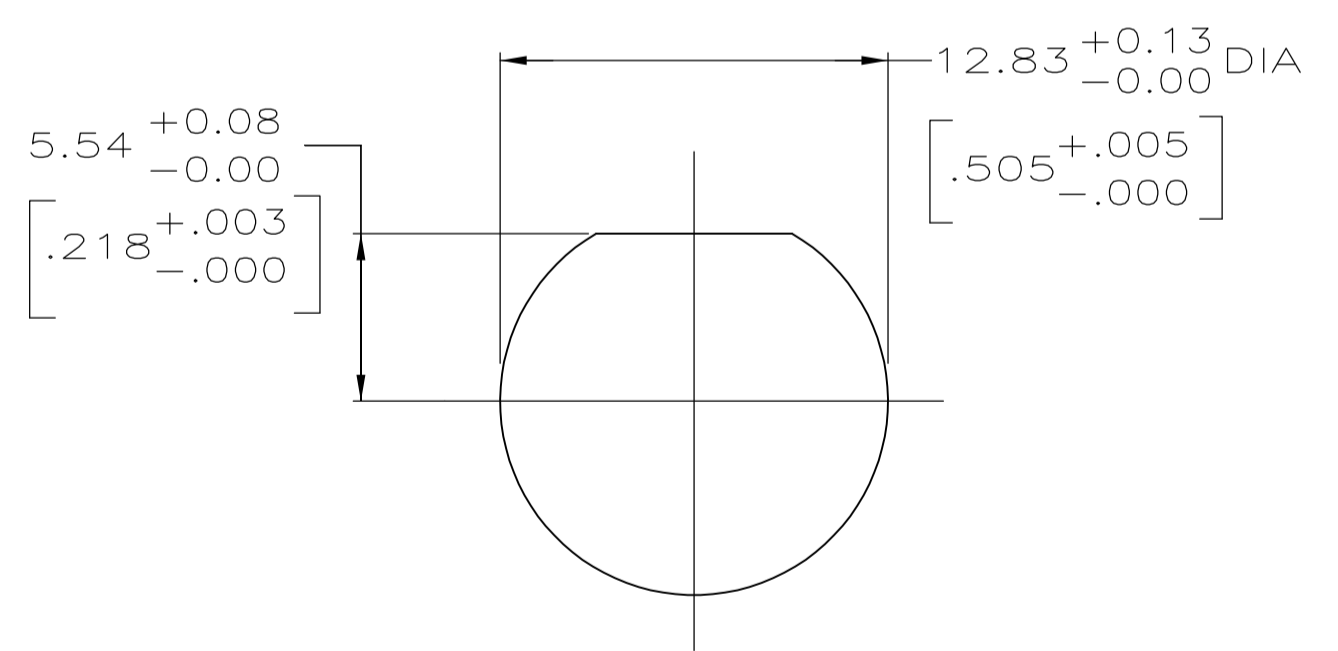
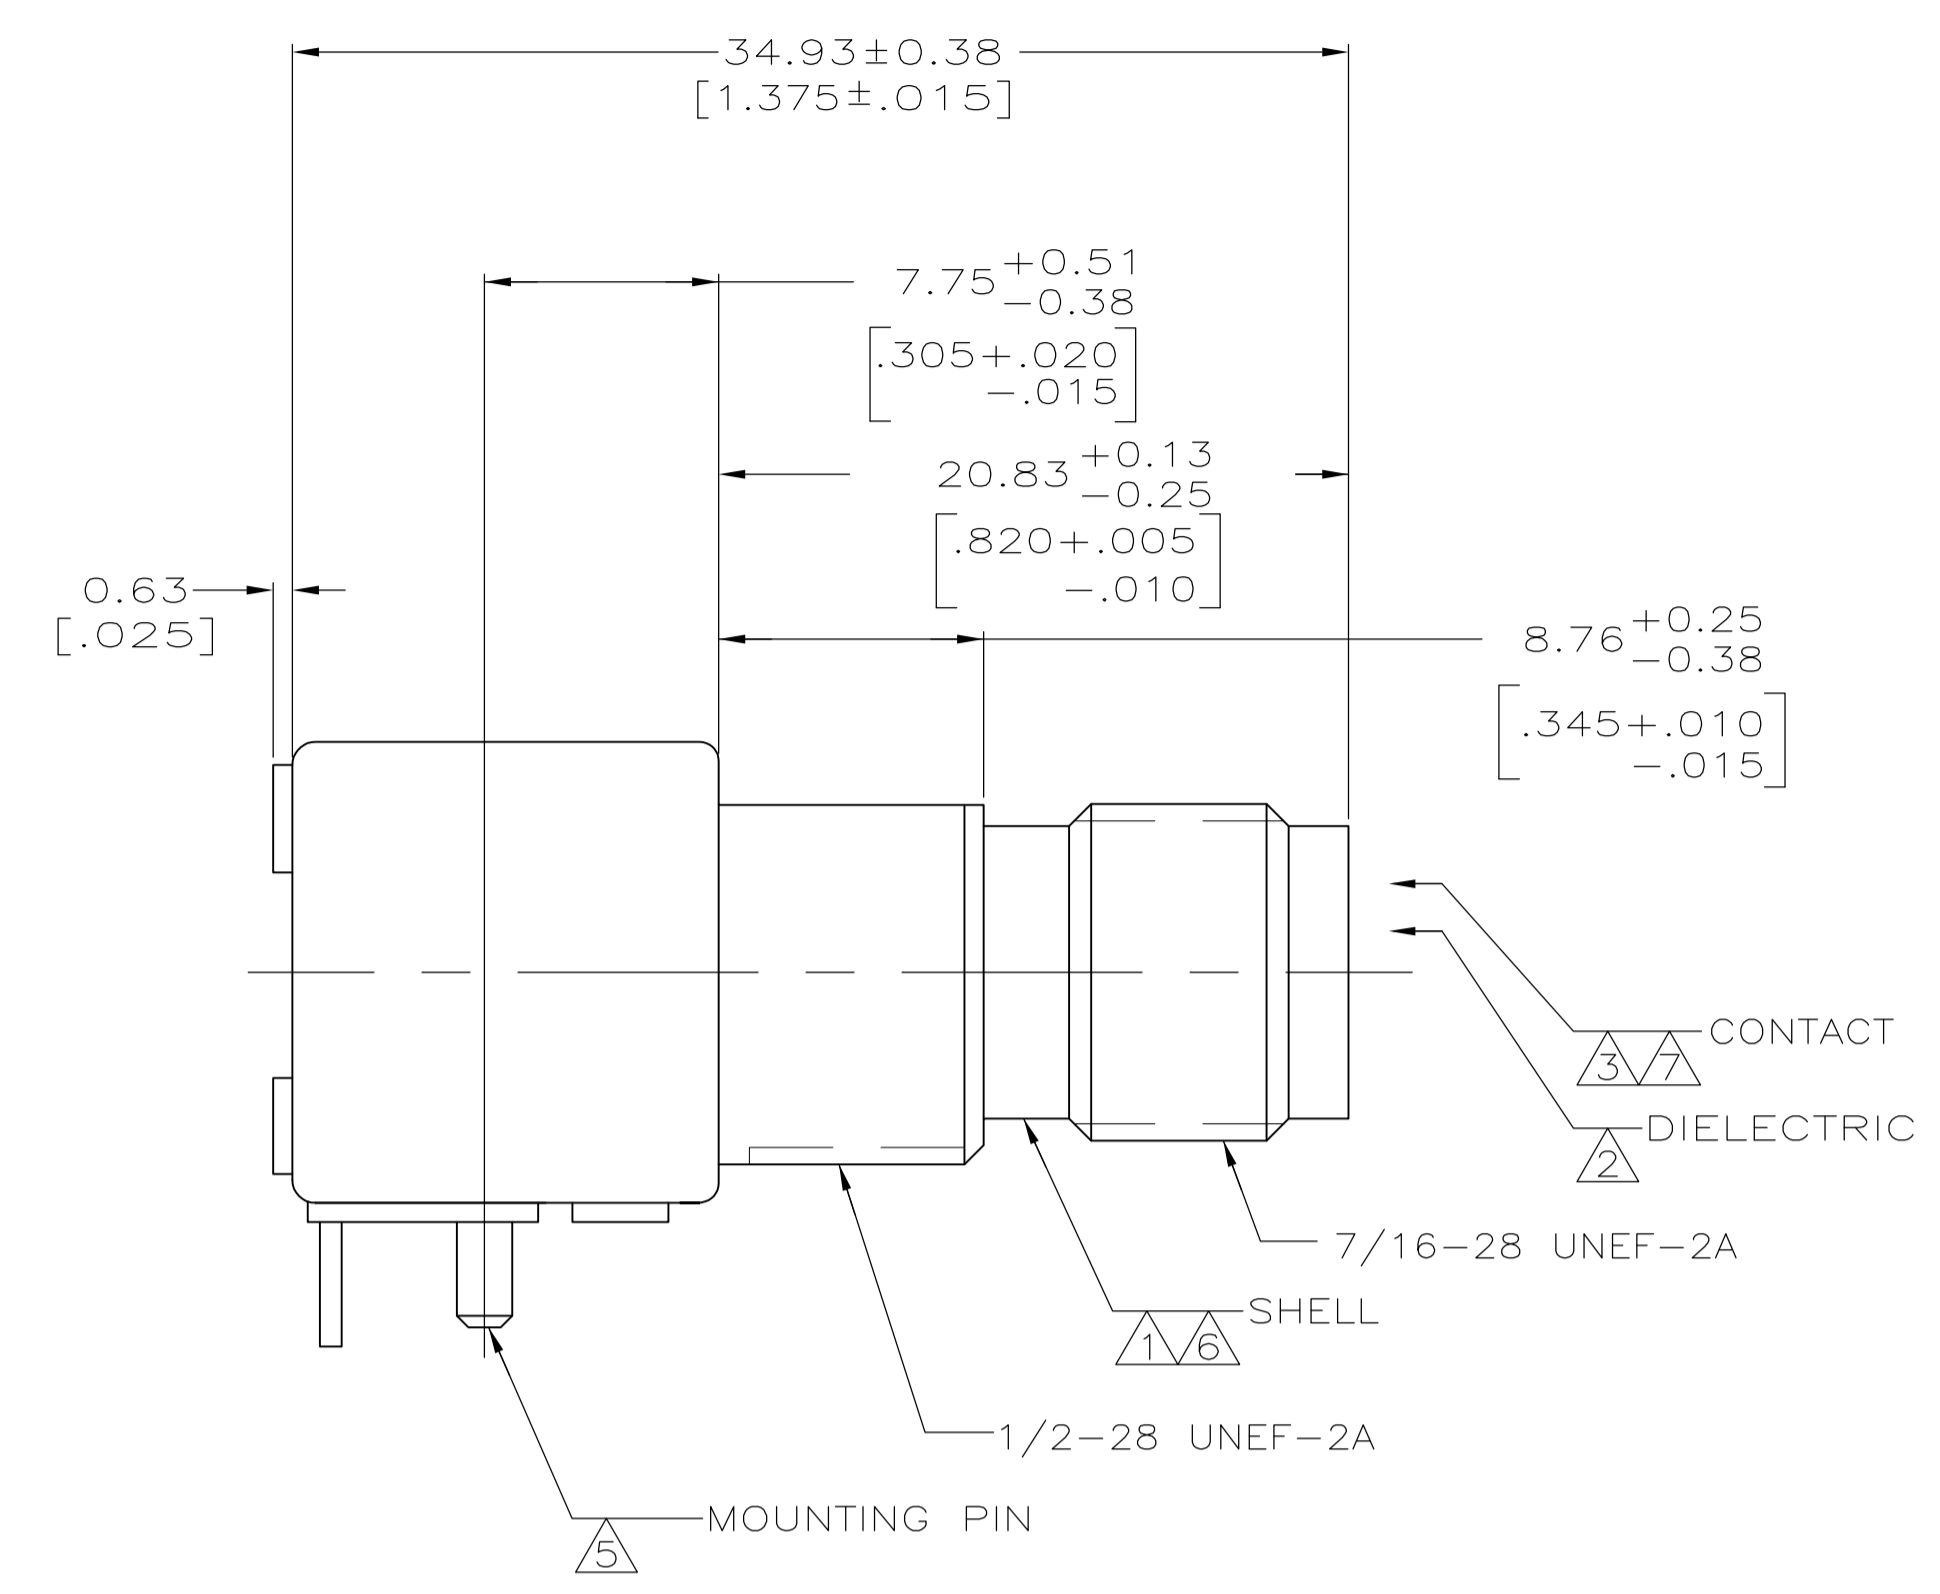


LOC		DIST		REVISIONS			
AJ	16	P	LTR	DESCRIPTION	DATE	DMN	APVD
		A1	REVISED PER	ECO-11-005030	11MAR11	RK	HMR

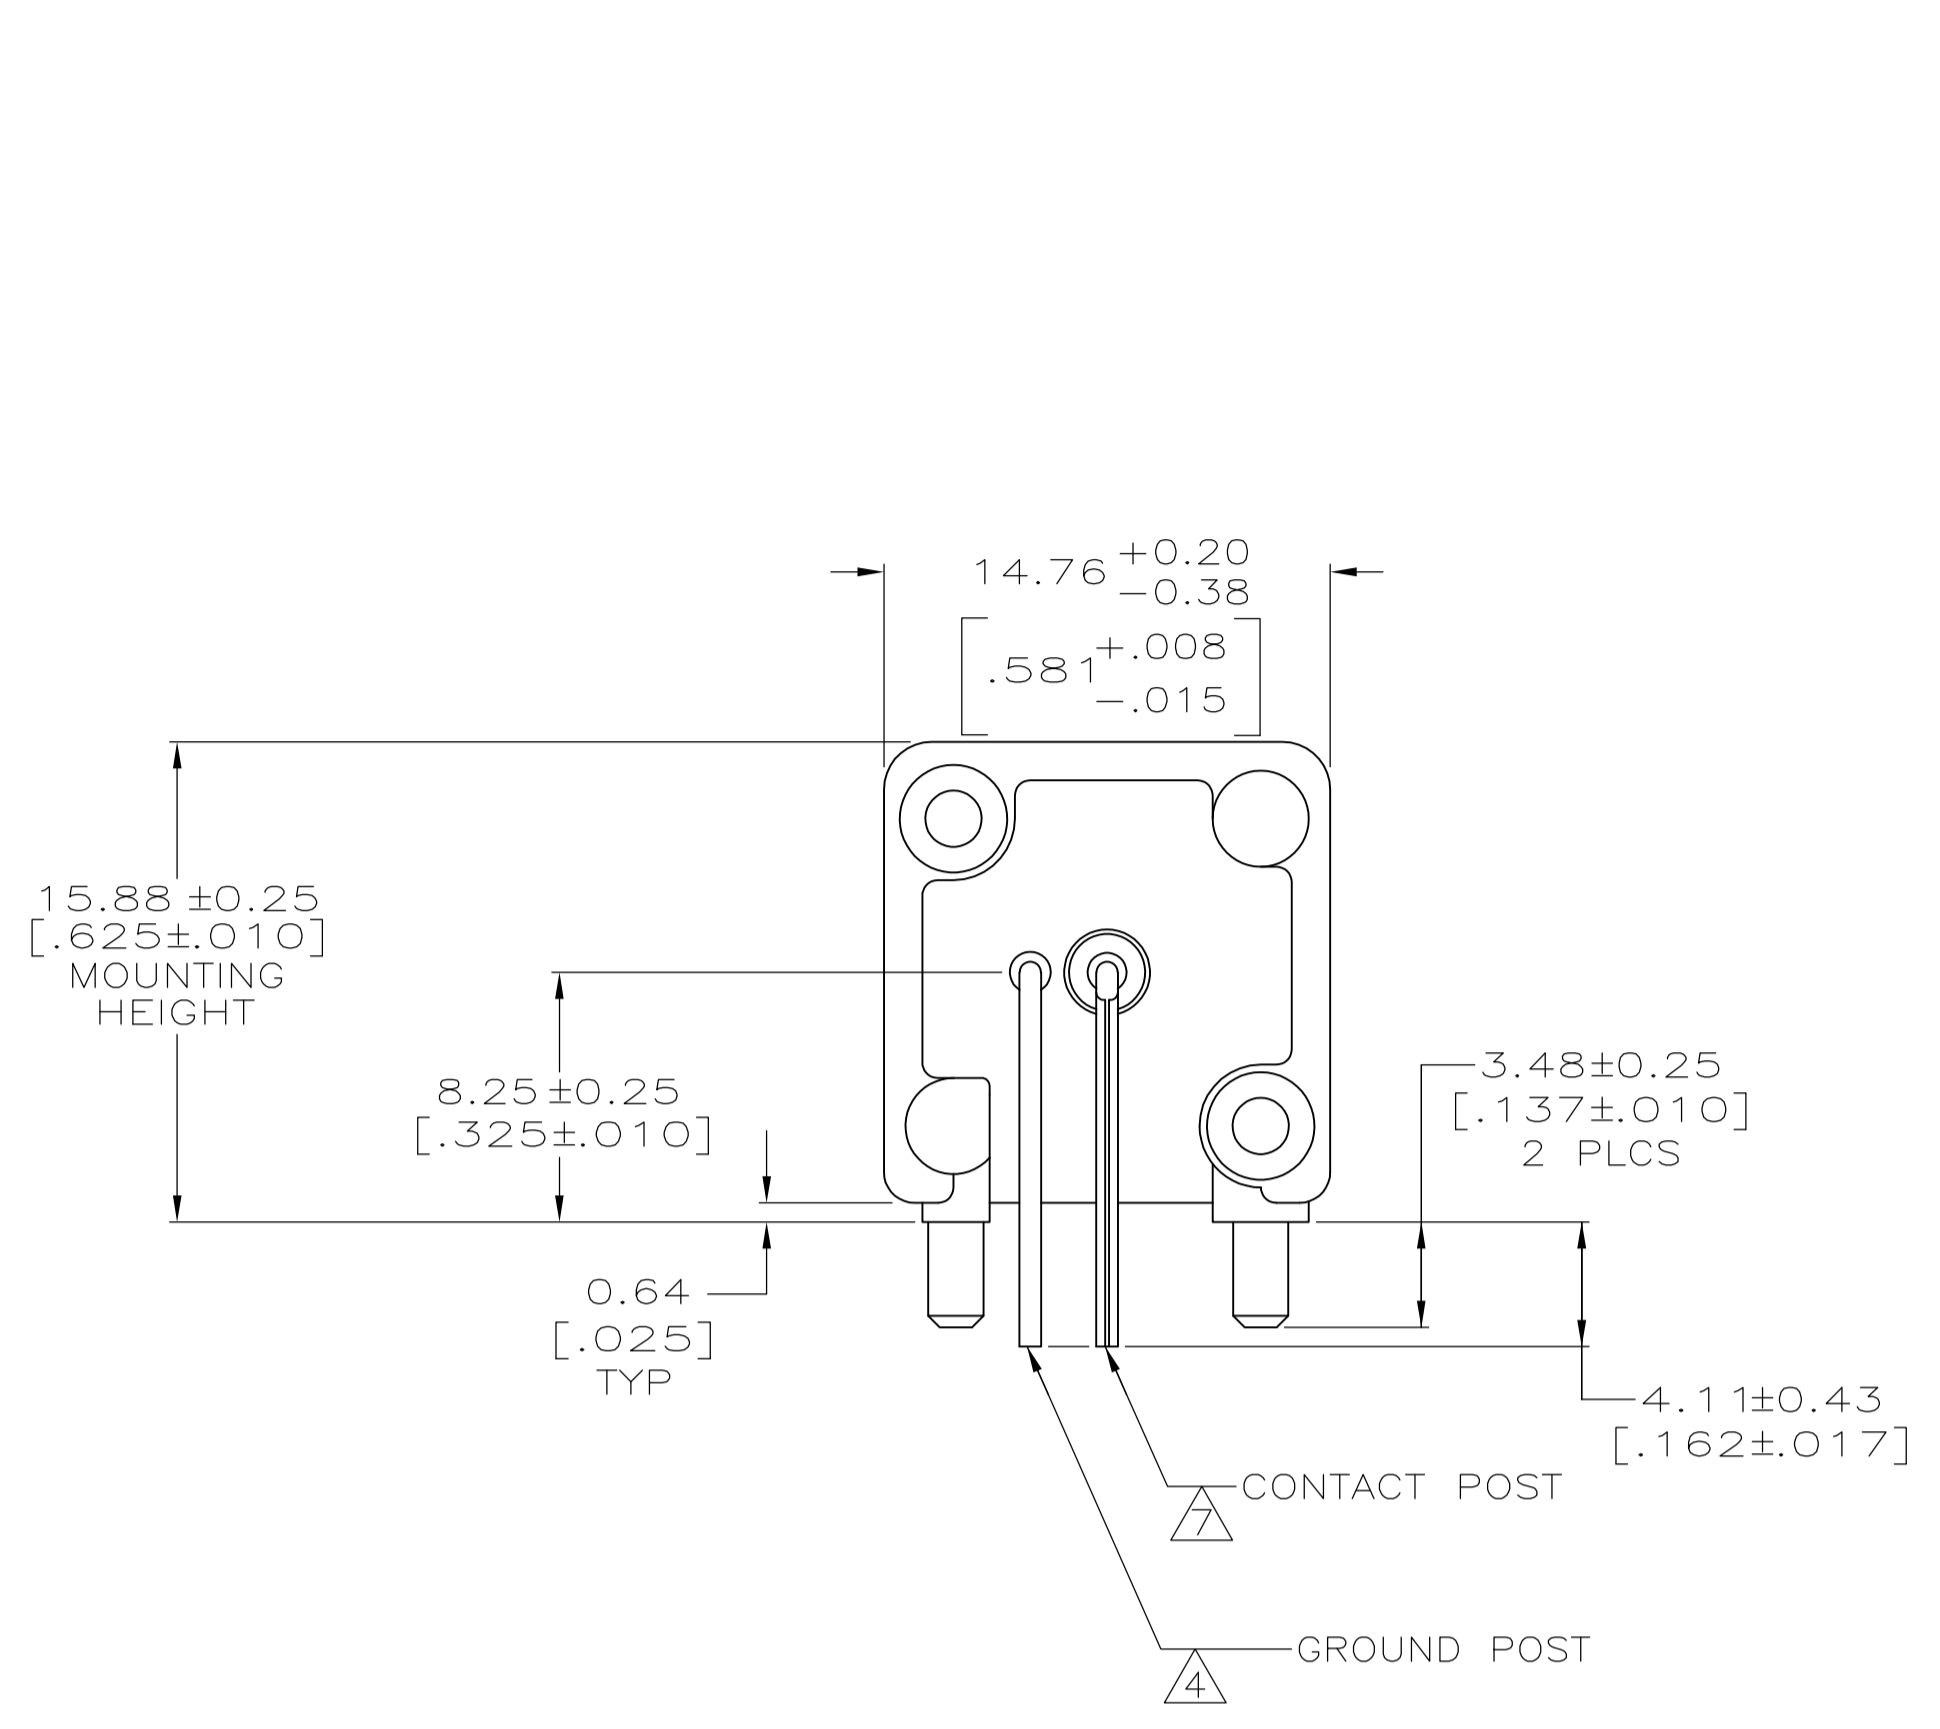

- ① ZINC PER QQ-Z-363.
- ② POLYMETHYLPENTENE, GENERAL PURPOSE.
- ③ PHOSPHOR BRONZE PER QQ-B-750.
- ④ BRASS PER ASTM-B-453.
- ⑤ BRASS PER ASTM-B-16.
- ⑥ NICKEL PLATE PER QQ-N-290, 3.81 μ m [.000150] MINIMUM THICK.
- ⑦ GOLD PLATE PER MIL-G-45204, 0.76 μ m [.000030] MINIMUM THICK.

RECOMMENDED PANEL CUTOUT

PCB CONFIGURATION

5227839-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	L. VARELA - DOCKS	21APR2005	TE Connectivity
DIMENSIONS: mm [INCHES]		CHK	J. HAVENER	21APR2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. LIPPERT	21APR2005	NAME
0 PLC	± -	PRODUCT SPEC		JACK, RIGHT ANGLE, 50 OHM, PCB, TNC	
1 PLC	± -	APPLICATION SPEC		SIZE	A1
2 PLC	± 0.20 [.008]	MATERIAL		CAGE CODE	00779
3 PLC	± -	FINISH		DRAWING NO	5227839
4 PLC	± -	WEIGHT		RESTRICTED TO	-
ANGLES	± -	CUSTOMER DRAWING		SCALE	4:1
SEE NOTES 1-4	SEE NOTES 5-7	SHEET		1	1
		REV		A1	