


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APVD
HM	00	AC REV; ECO-14-004910	26FEB2014	GG	JG

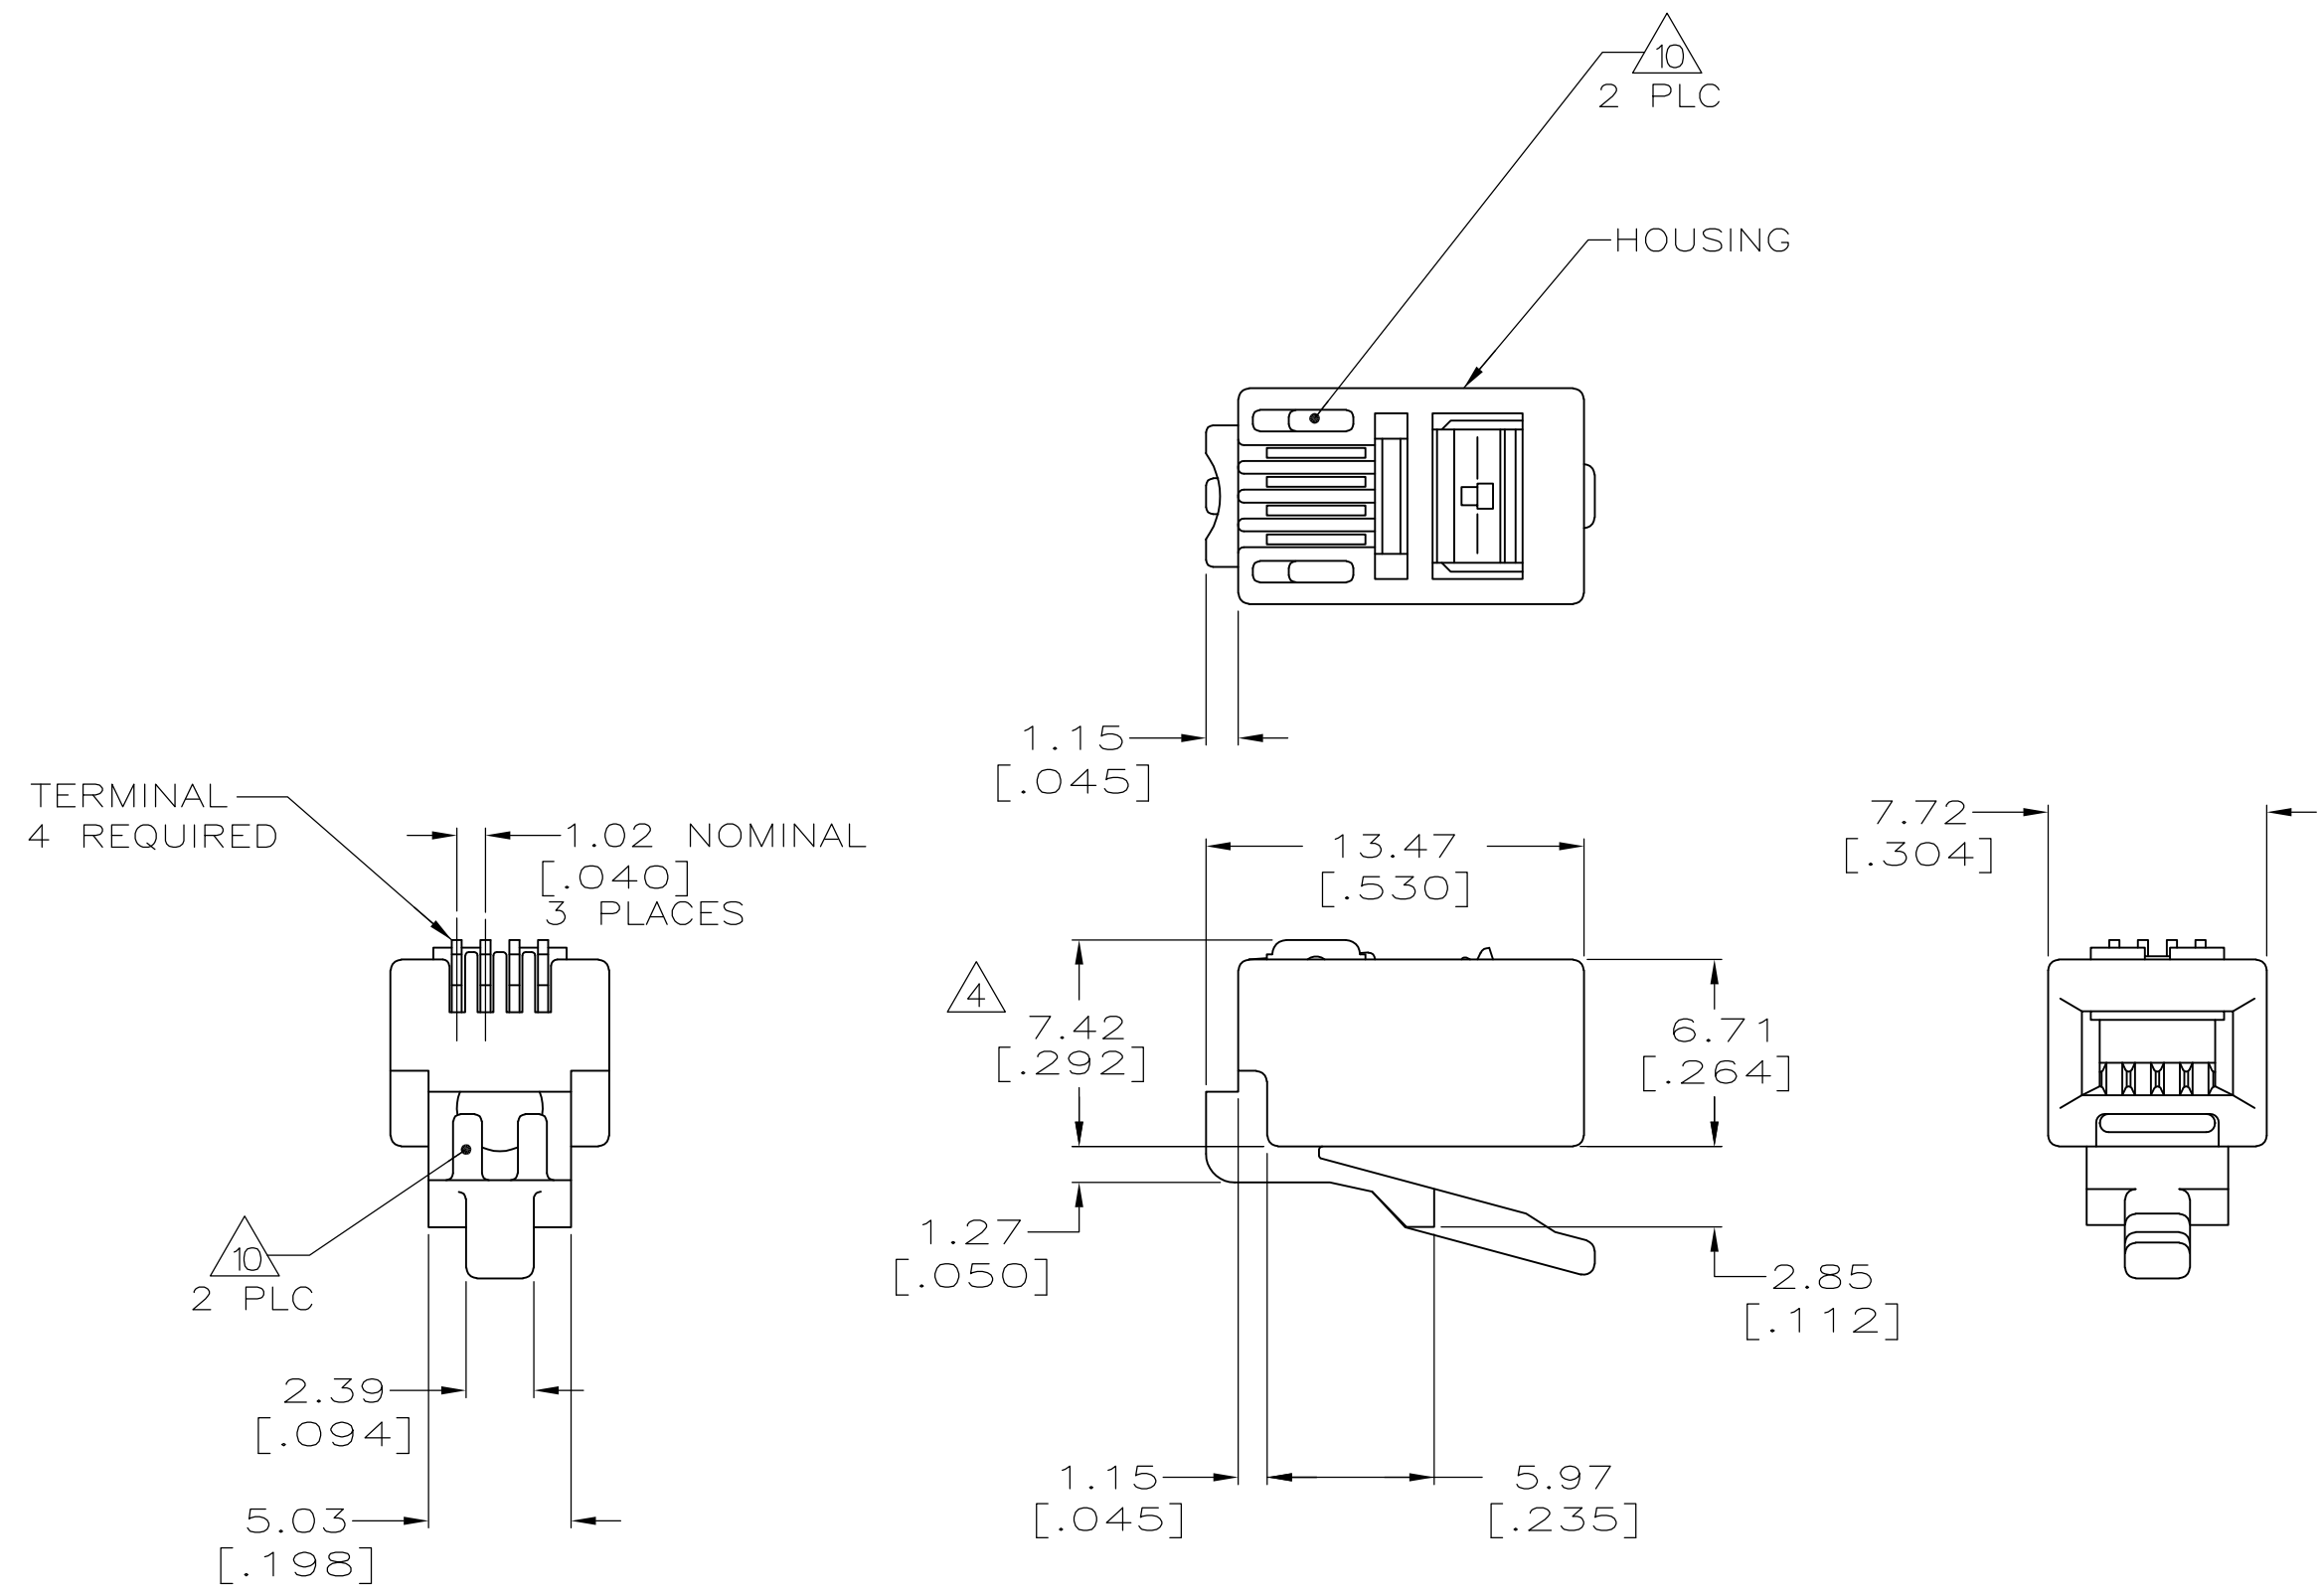

- 1 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2 MATERIAL: HOUSING-POLYCARBONATE, CLEAR. TERMINAL - .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 $\mu$ m[.000007] THICK GOLD IN LOCALIZED PLATE AREA, OVER .762 $\mu$ m[.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 $\mu$ m[.000100] THICK NICKEL ON ENTIRE CONTACT.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE, 0.99[.039] MAX INSULATION DIAMETER, WITH A 2.29 X 4.83 [.090 X .190] OVAL JACKET.
- 4 TERMINATED DIMENSION 6.15[.242] MAXIMUM.
- 6 10,000 ASSEMBLES PER PACKAGE.
- 7 1000 ASSEMBLES PER PACKAGE.
- 8 100 ASSEMBLES PER PACKAGE.

**SUPERSEDED BY 5-641334-2**

8	5-641334-3
7	5-641334-2
6	5-641334-1
10	641334-1
REELED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	8-31-93	TE Connectivity	MODULAR PLUG ASSEMBLY, 4 POSITION, HANDSET
DIMENSIONS: mm[INCHES]		YTP/UTA	9-15-93		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		C.WHITT	APVD		
0 PLC	± -	10	NAME	PRODUCT SPEC	
1 PLC	± -	1	108-1163	APPLICATION SPEC	
2 PLC	± -	1	114-6016	SIZE	CAGE CODE
3 PLC	± -	1	114-6016	DRAWING NO	RESTRICTED TO
4 PLC	± -	1	114-6016	A2	00779
ANGLES	± -	1	114-6016	G-641334	1 OF 1
MATERIAL	-	2	114-6016	SCALE	4:1
FINISH	-	2	114-6016	SHEET	1 OF 1
CUSTOMER DRAWING		SCALE 4:1		REV AC	