


| HAND TOOL<br>Handzage                                     | APPLICATOR<br>Anschlag-WKZ | INSULATION BARREL<br>Isolationsbereich |     |     |     |     |                   | WIRE BARREL<br>Drahtbereich |     |                    |     |     |                   | INSULATION RANGE<br>Isolations-<br>durchmesser | WIRE RANGE<br>DGB<br>[mm 2] | FINISH<br>Oberfläche | MATERIAL | TE CONNECTIVITY<br>ORDER No.<br>LOOSE PIECE<br>Einzelauflöcherung | REV                      | TE CONNECTIVITY<br>ORDER No.<br>STRIP FORM<br>Bandware |  |                           |  |             |  |
|---|----------------------------|--|-----|-----|-----|-----|-------------------|-----------------------------|-----|--------------------|-----|-----|-------------------|--|-----------------------------|----------------------|----------|---|--------------------------|--|--|---------------------------|--|-------------|--|
|   |                            | K                                      | H   | R   | G   | F   | D <sub>WIRE</sub> | K                           | H   | D <sub>INSUL</sub> | G   | F   | D <sub>WIRE</sub> |  |                             |                      |          |   |                          |  |  |                           |  |             |  |
| N/A   | N/A                        | 4.3                                    | 4.8 | 2.8 | 4.0 | 3.1 | 1.7               | 4.6                         | 5.6 | 3.6                | 4.0 | 3.8 | 1.7               | 0.85   | 0.95                        | 7.5                  | 5.9      | 3.5   | ∅3.4                     | 1.0 - 2.5<br>FLR                                       | PRETINNED min.1µm<br>SEL. GOLD PLATED<br>PLAIN   | CuSn4<br>CuZn30<br>CuZn30 | 0-965975-5<br>0-965975-4<br>0-965975-3 | J<br>J<br>J | 0-929949-5<br>0-929949-4<br>0-929949-3 |
| N/A   | N/A                        | 4.3                                    | 4.8 | 2.8 | 3.0 | 2.2 | 1.2               | 4.6                         | 5.4 | 3.2                | 3.0 | 2.8 | 1.2               | 0.9  | 0.7                         | 7.0                  | 5.4      | 3.0   | ∅3.4                     | 0.5 - 1.0<br>FLR                                       | PRETINNED min.1µm<br>SEL. GOLD PLATED<br>PLAIN   | CuSn4<br>CuZn30<br>CuZn30 | 0-965974-7<br>0-965974-6<br>0-965974-5 | A<br>A<br>J | 0-929948-7<br>0-929948-6<br>0-929948-5 |
| 2-1579001-1<br>WITH DIE SET:<br>mit Matrize:<br>1579001-2 | N/A                        | 2.5                                    | 2.5 | 1.4 | 2.2 | 2.0 | 0.8               | 2.8                         | 2.8 | 1.4                | 2.2 | 2.2 | 0.8               | 0.65   | 0.2                         | 5.7                  | 4.1      | 2.5   | ∅1.15 - 1.6              | 0.2 - 0.5<br>FLR                                       | PRETINNED min.1µm<br>SEL. GOLD PLATED<br>PLAIN   | CuSn4<br>CuZn30<br>CuZn30 | 0-963962-5<br>0-963962-4<br>0-963962-3 | D<br>D<br>D | 0-963961-5<br>0-963961-4<br>0-963961-3 |
| 539635-1<br>WITH DIE SET:<br>mit Matrize:<br>539743-2     | 878416-0                   | 3.7                                    | 3.1 | 1.8 | 3.0 | 2.2 | 1.2               | 4.1                         | 3.9 | 1.8                | 3.0 | 2.8 | 1.2               | 0.65   | 0.2                         | 6.2                  | 4.6      | 3.0   | ∅1.4 - 2.3               | 0.5 - 1.0<br>FLR                                       | PRETINNED min.1µm<br>SEL. GOLD PLATED<br>PLAIN   | CuSn4<br>CuZn30<br>CuZn30 | 0-928931-5<br>0-928931-4<br>0-928931-3 | P<br>P<br>P | 0-928930-5<br>0-928930-4<br>0-928930-3 |
| 169400<br>WITH DIE SET:<br>mit Matrize:<br>734262 - 0     | 878402-0                   | 4.4                                    | 3.8 | 2.3 | 4.0 | 3.1 | 1.8               | 4.9                         | 4.7 | 2.6                | 4.0 | 3.8 | 1.8               | 1.15   | 0.3                         | 7.2                  | 5.6      | 4.0   | ∅1.8 - 2.9               | 1.0 - 2.5<br>FLR                                       | PRETINNED min.1µm<br>SEL. GOLD PLATED<br>PLAIN   | CuSn4<br>CuZn30<br>CuZn30 | 0-928794-5<br>0-928794-4<br>0-928794-3 | R<br>R<br>R | 0-928781-5<br>0-928781-4<br>0-928781-3 |
| N/A   | 878227-0                   | 4.8                                    | 4.2 | 2.4 | 4.0 | 3.1 | 1.9               | 5.3                         | 4.8 | 3.1                | 4.0 | 3.8 | 1.9               | 1.15   | 0.4                         | 7.2                  | 5.6      | 4.0   | ∅2.3 - 3.5<br>RB-Leitung | 1.5 - 3<br>FLR   | PRETINNED min.1µm<br>SEL. SILVER PLATED<br>PLAIN | CuSn4<br>CuSn4<br>CuSn4   | 0-928924-5<br>0-928924-4<br>0-928924-3 | R<br>R<br>R | 0-927893-5<br>0-927893-4<br>0-927893-3 |
| N/A   | N/A                        | 3.3                                    | 3.1 | 1.8 | 3.0 | 2.2 | 1.2               | 3.65                        | 3.6 | 2.0                | 3.0 | 2.8 | 1.2               | 0.65   | 0.3                         | 6.2                  | 4.6      | 3.0   | ∅1.6 - 2.2<br>RB-Leitung | 0.5 - 1.0<br>FLR                                       | PRETINNED min.1µm<br>SEL. SILVER PLATED<br>PLAIN | CuSn4<br>CuSn4<br>CuSn4   | 0-928923-5<br>0-928923-4<br>0-928923-3 | S<br>S<br>S | 0-927892-5<br>0-927892-4<br>0-927892-3 |
|   |                            |  |     |     |     |     |                   |                             |     |                    |     |     |                   |  |                             |                      |          |   |                          |  |  |                           |  |             |  |

NOTES:  
Bemerkungen

- 1 CONTACT AREA min.0.75 µm Au OVER min.1.25 µm Ni  
Kontaktbereich min.0.75 µm Au über min.1.25 µm Ni
- 2 CRIMP AREA 1-2 µm Sn OVER min.0.05 µm Ni  
Crimpbereich 1-2 µm Sn über min.0.05 µm Ni
- 3 Min.3 µm Ag IN LOCALIZED AREA. FLASH Ag ON REMAINDER.  
BOTH OVER min.1.25 µm Ni  
Bei Ausstellgung 2 mm
- 4 ALL VERSIONS SPLICE FREE EXCEPT OF  
Alle Versionen Splice-free außer
- 5 SPLICE ACCORDING TO TE CONNECTIVITY-SPEC. 118-10107 SPLICE ADDITIONAL MARK  
WITH RED SPLICE-STICKER ON THE INTERLEAVING PAPER AND ON THE REEL  
Splice nach Tyco-Spec. 118-10107 zusätzlich Splice mit rotem Splice-Aufkleber  
auf dem Zwischenlagenpapier und auf dem Reel kennzeichnen
- 6 TO BE MEASURED BY DIMENSION 2 mm  
Bei Ausstellgung 2 mm
- 7 REELING TYPE

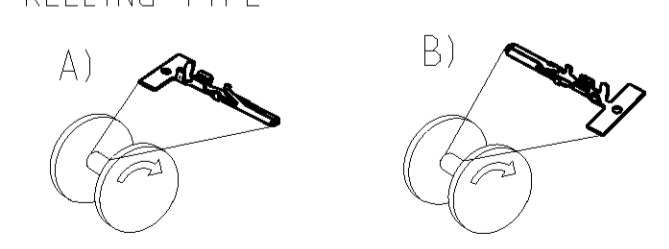

|  |  |  |                       |                          |
|--|--|--|-----------------------|--------------------------|
| DIMENSIONS:<br>mm                      | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:<br>ISO 2768 -H E | DRN<br>P. Hasek  | Z1AUG2006<br>60CT2006 | TE Connectivity          |
| MATERIAL<br>see table<br>siehe Tabelle | FINISH<br>see table<br>siehe Tabelle                       | APVD<br>P. Vlcek                                       | 90CT2006              | TE Connectivity          |
| PRODUCT SPEC<br>108-18299              |  | PRODUCT GROUP DRAWING FOR<br>2.8 mm FASTIN-FASTON® TAB |                       |                          |
| APPLICATION SPEC<br>114-18014          |  | SIZE<br>A1   | CAGE CODE<br>00779    | DRAWING NO.<br>C=1670467 |
| CUSTOMER DRAWING                       |  | SCALE<br>5:1   | SHEET<br>1            | OF<br>1                  |