



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	D	REVISED PER ECO-13-015151	16DEC2013	FL	FY	

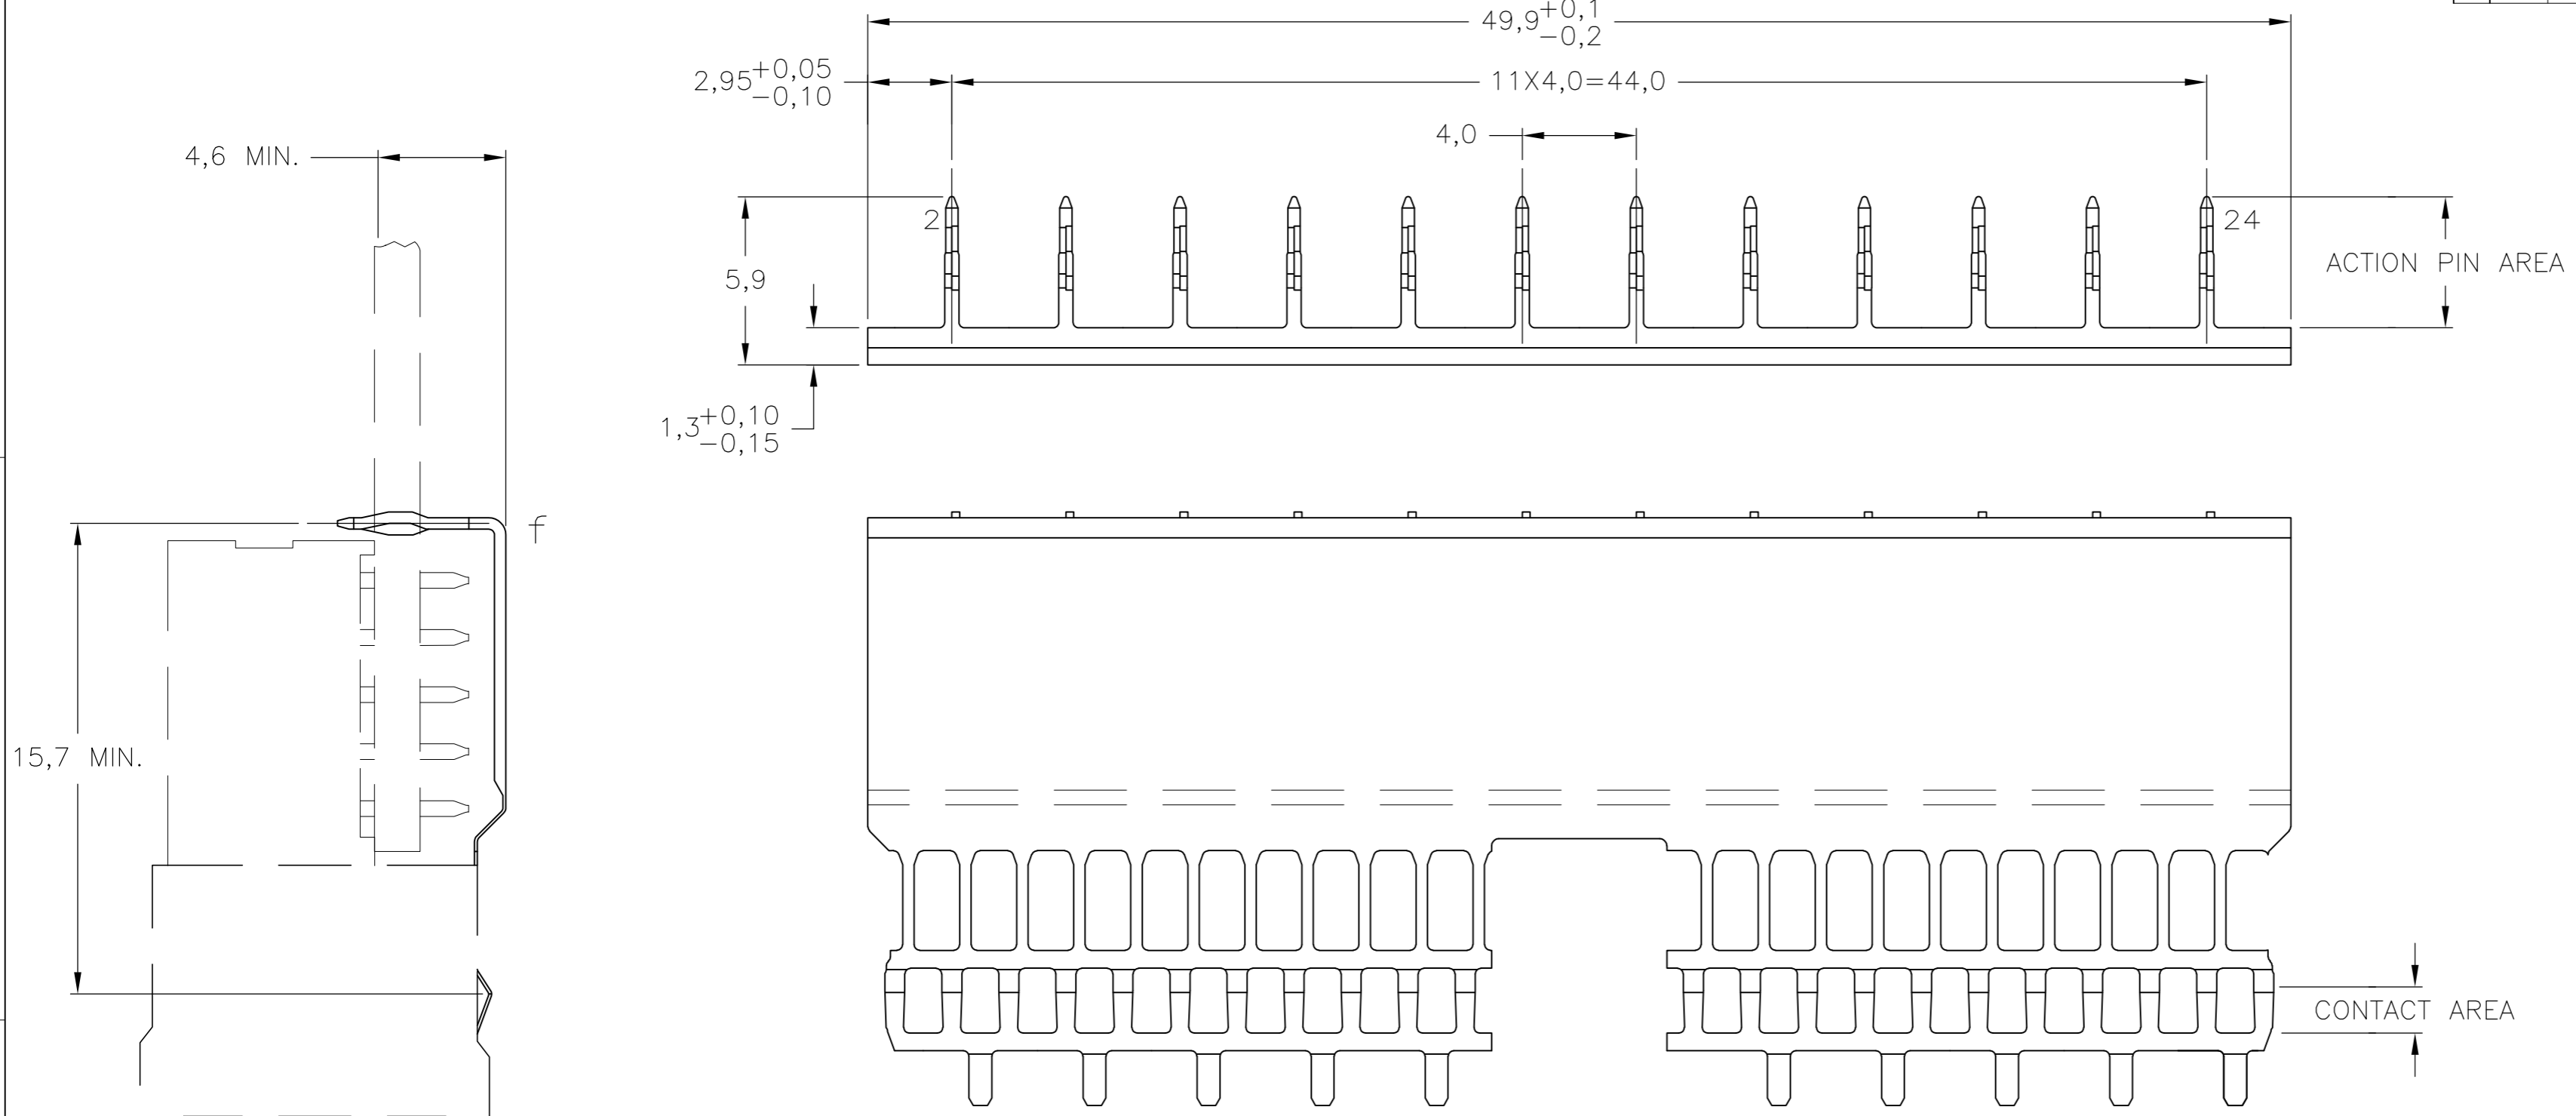

**NOTES:**

- △ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- △ MATERIAL; PHOSPHORBRONZE.
- △ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
- △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- 5 MAX. BOARD THICKNESS 3,5 mm.
- △ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- △ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- △ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- △ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

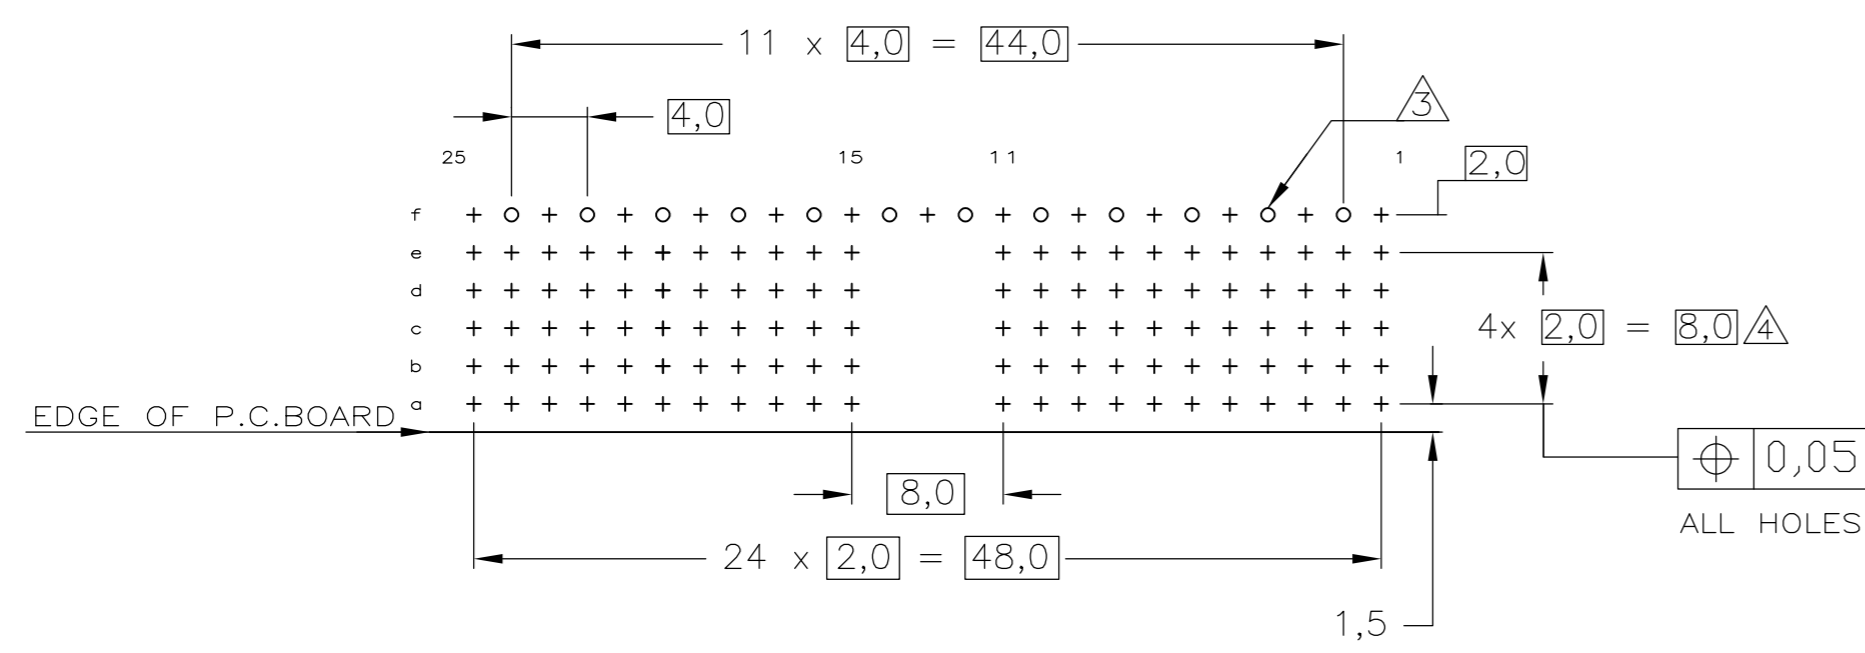

COMPONENT SIDE AS SHOWN  
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN  
 FOR DETAILS SEE APPLICATION SPECIFICATION

FINISH		MATERIAL		PARTNUMBER	
△	△	△	△	4-5338108-0	
△	△	△	△	5338108-9	
△	△	△	△	5338108-2	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	13AUG04	TE Connectivity	
DIMENSIONS: mm		CHK	25MAR05	Z-PACK 2mm HM	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	25MAR05	GROUND RETURN LOWER SHIELD	
0-PLC ±		PRODUCT SPEC		TYPE A	
1-PLC ±		APPLICATION SPEC		SIZE	CAGE CODE
2-PLC ±		108-19082		A2	00779
3-PLC ±		114-19029		SCALE	DRAWING NO
4-PLC ±				5:1	C=5338108
ANGLES ±		WEIGHT		SHEET	1 of 1
FINISH		CUSTOMER DRAWING		REV	D