

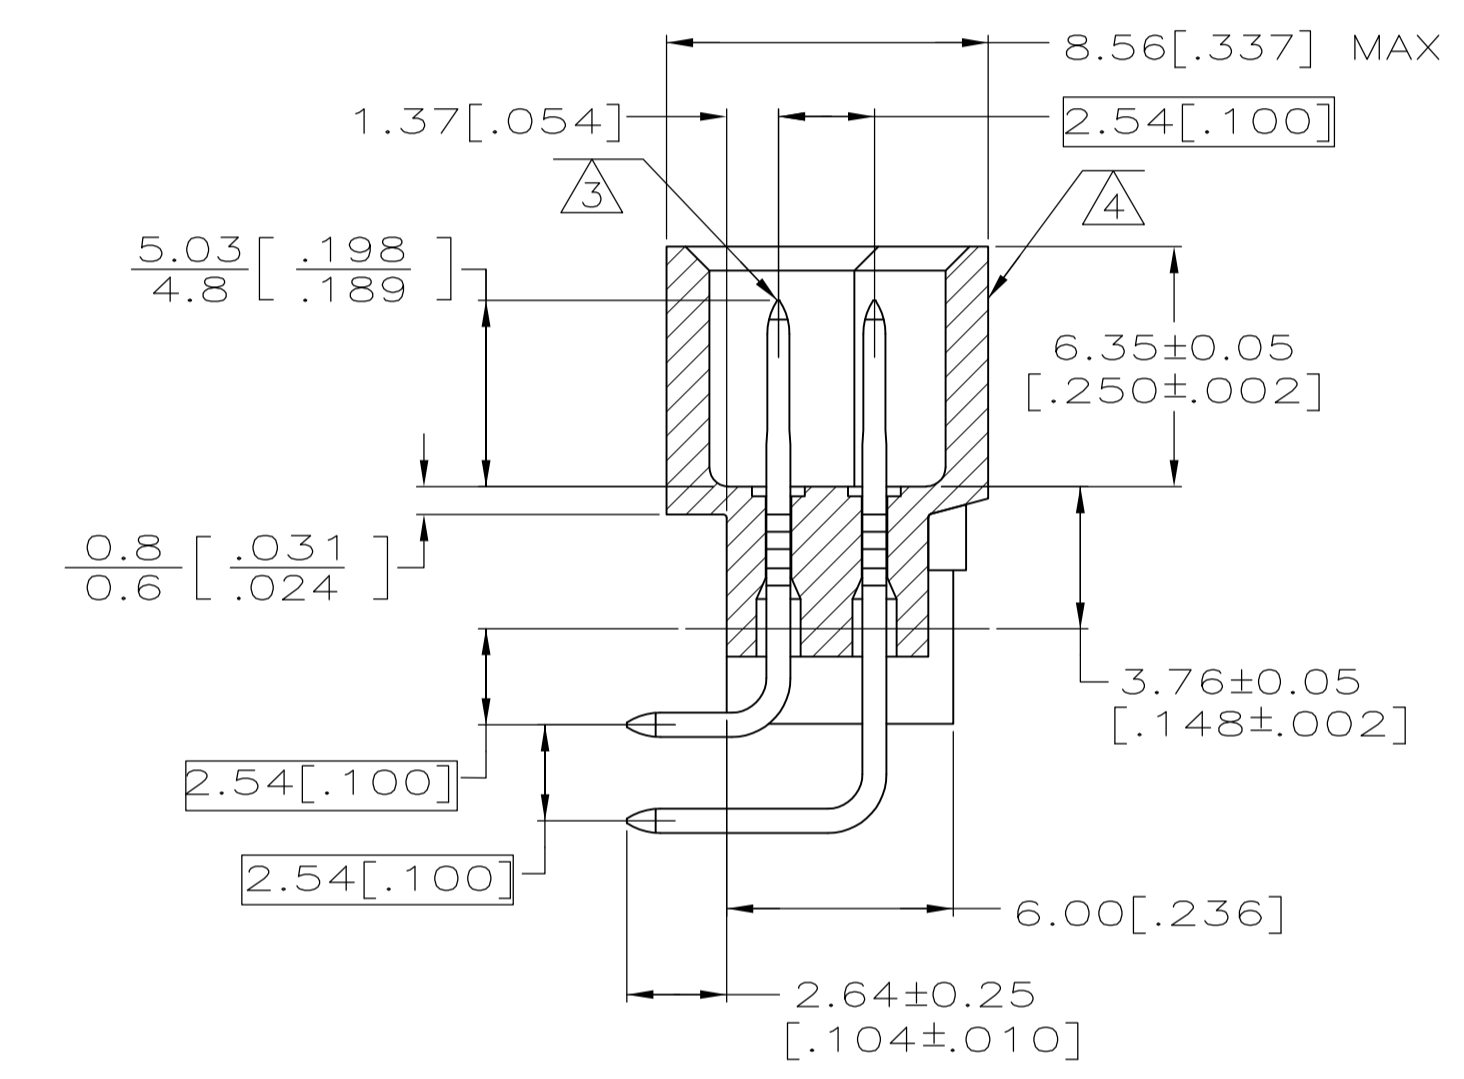
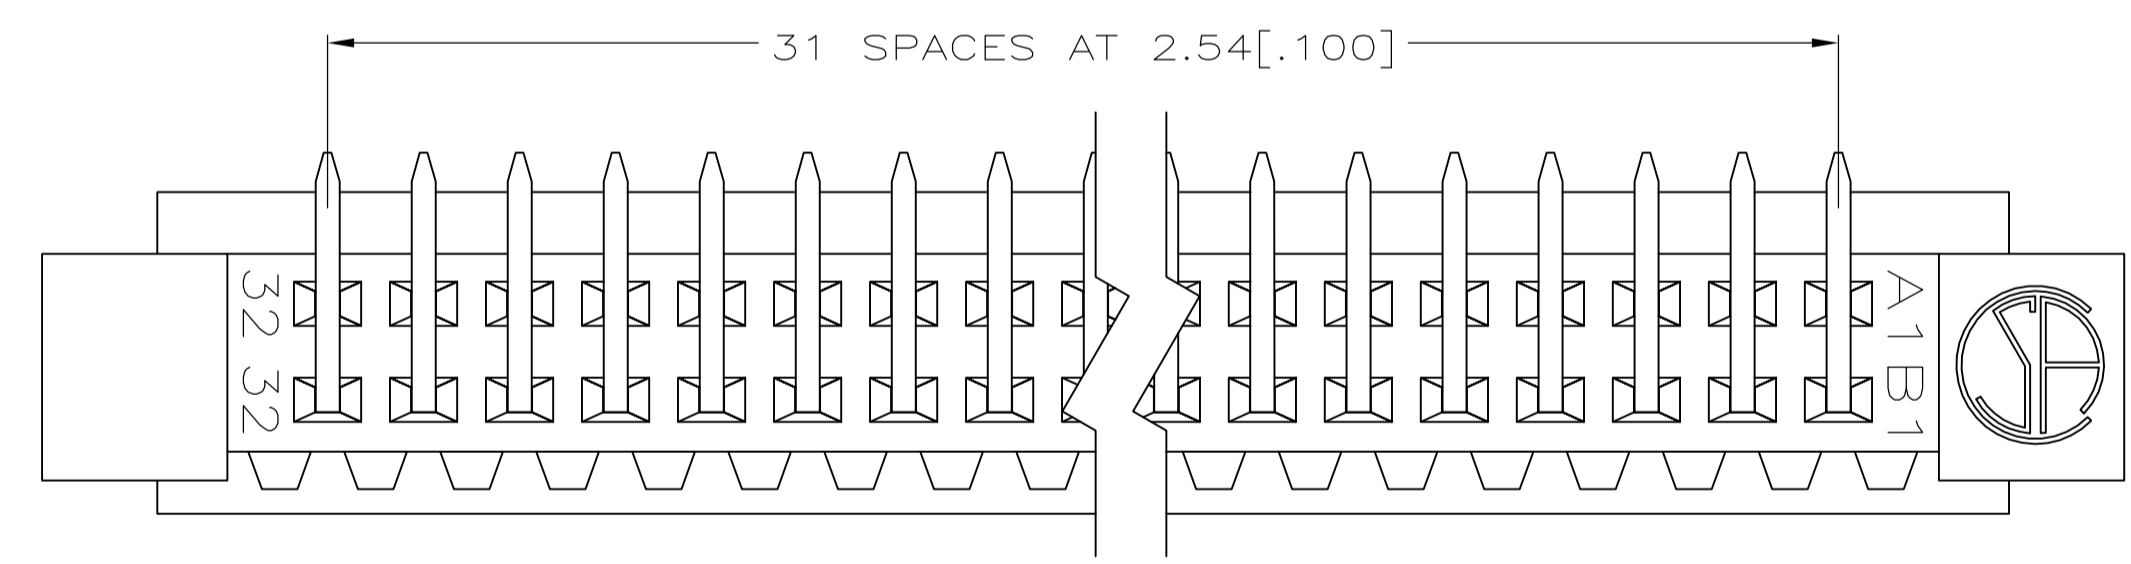
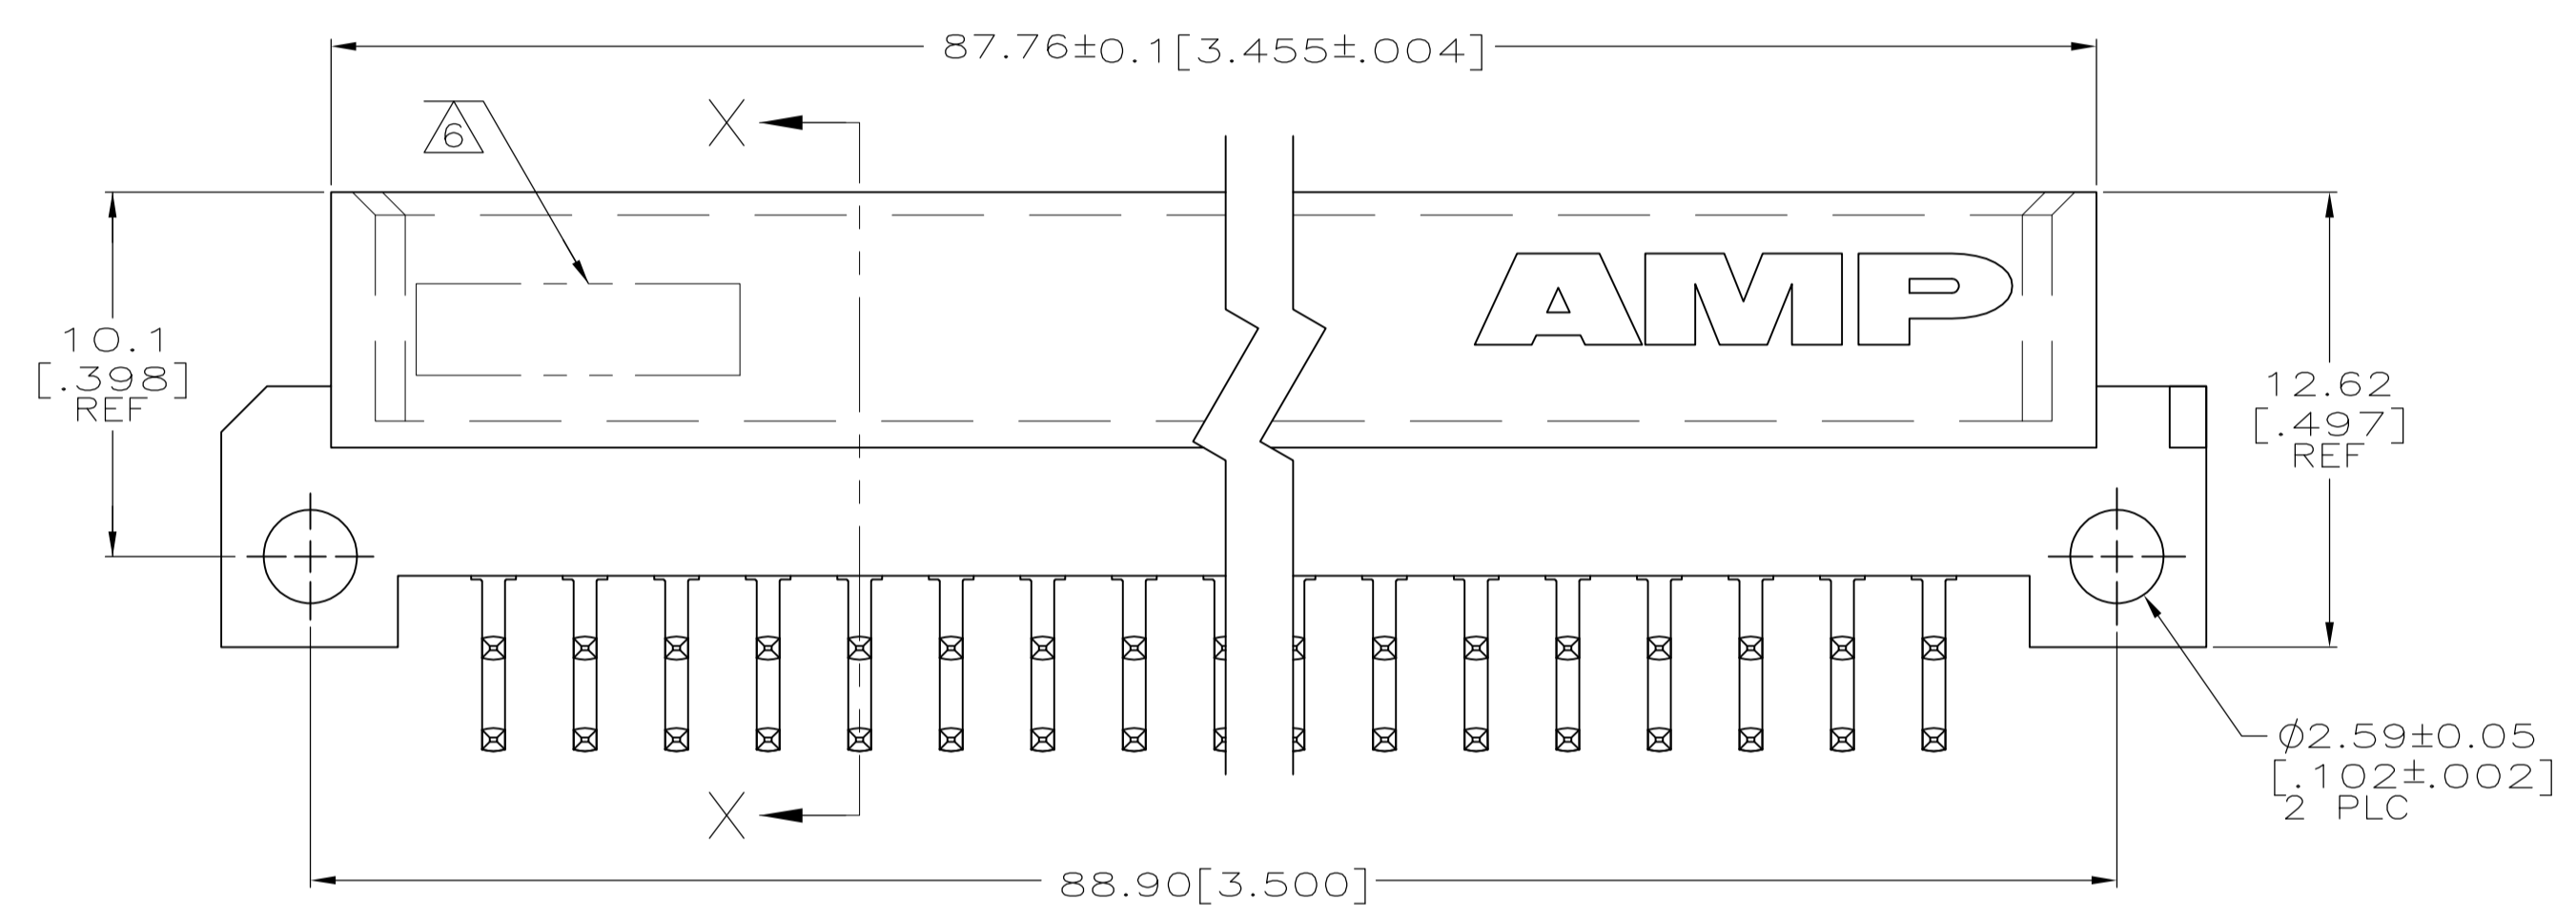


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ MARKING ON THIS SIDE.
- ⑤ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑥ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.

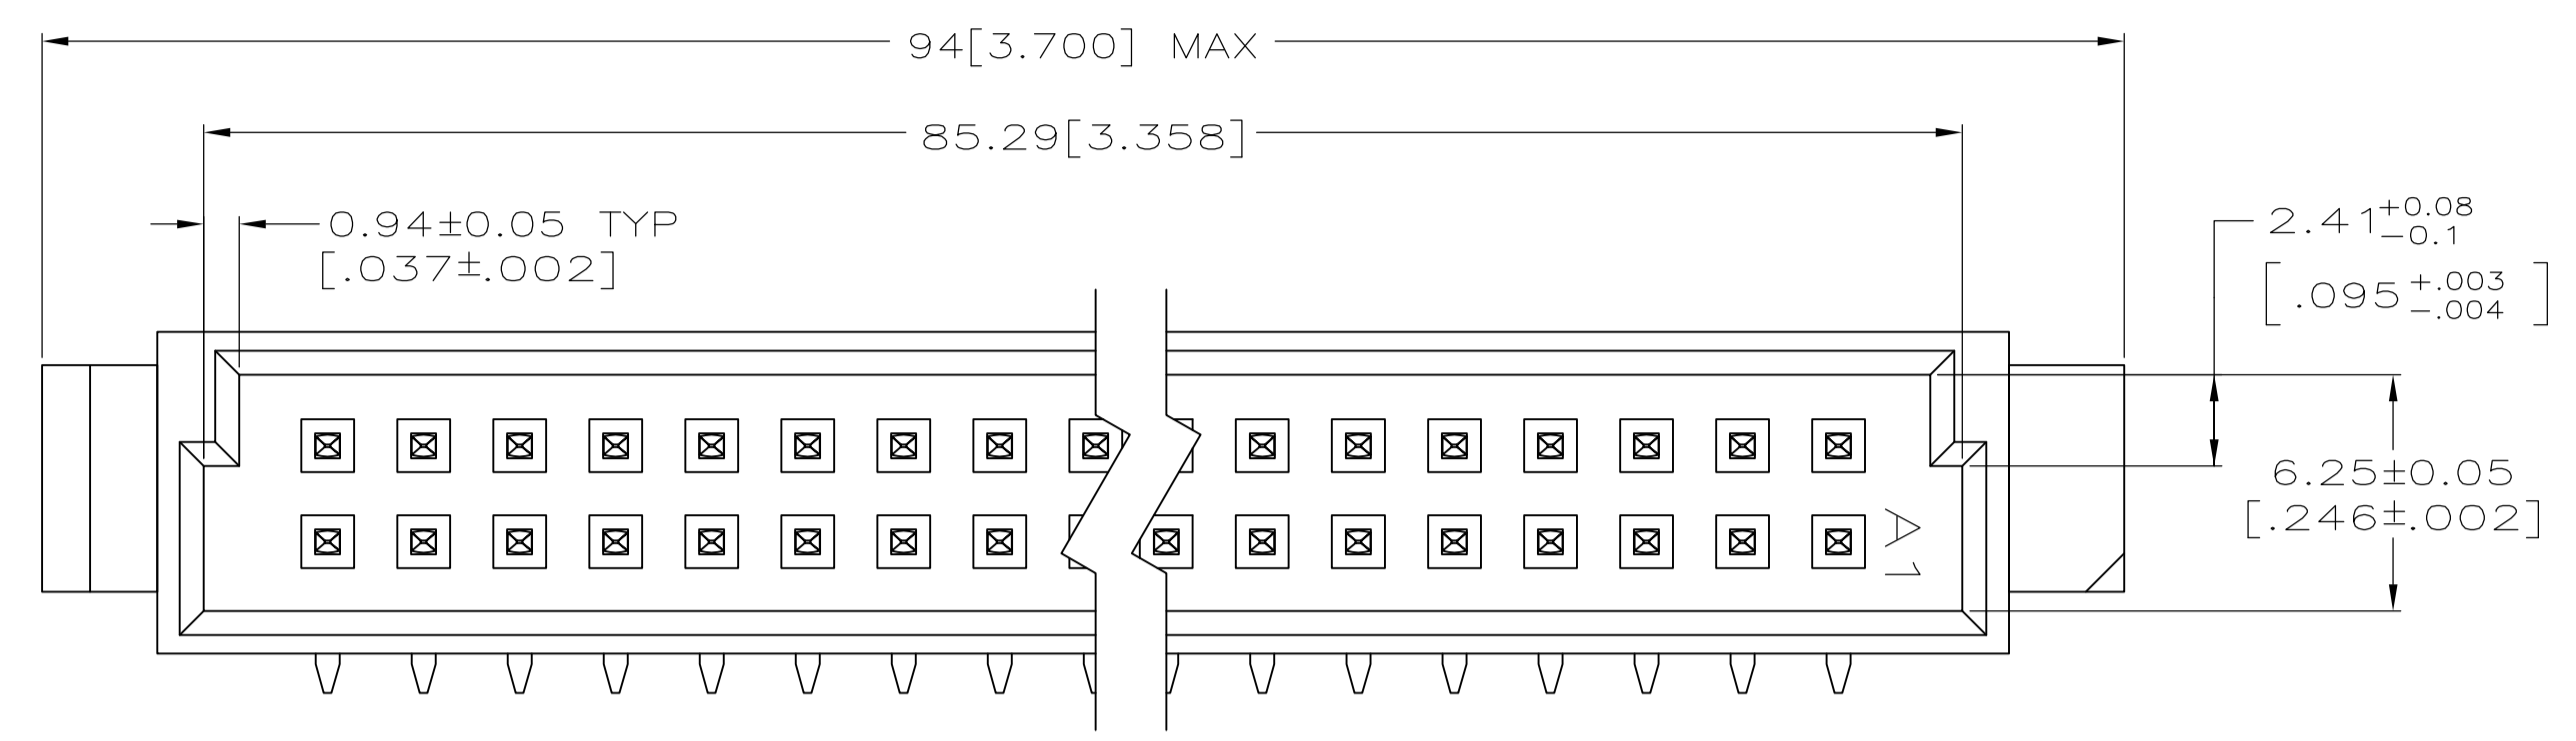

SECTION X-X

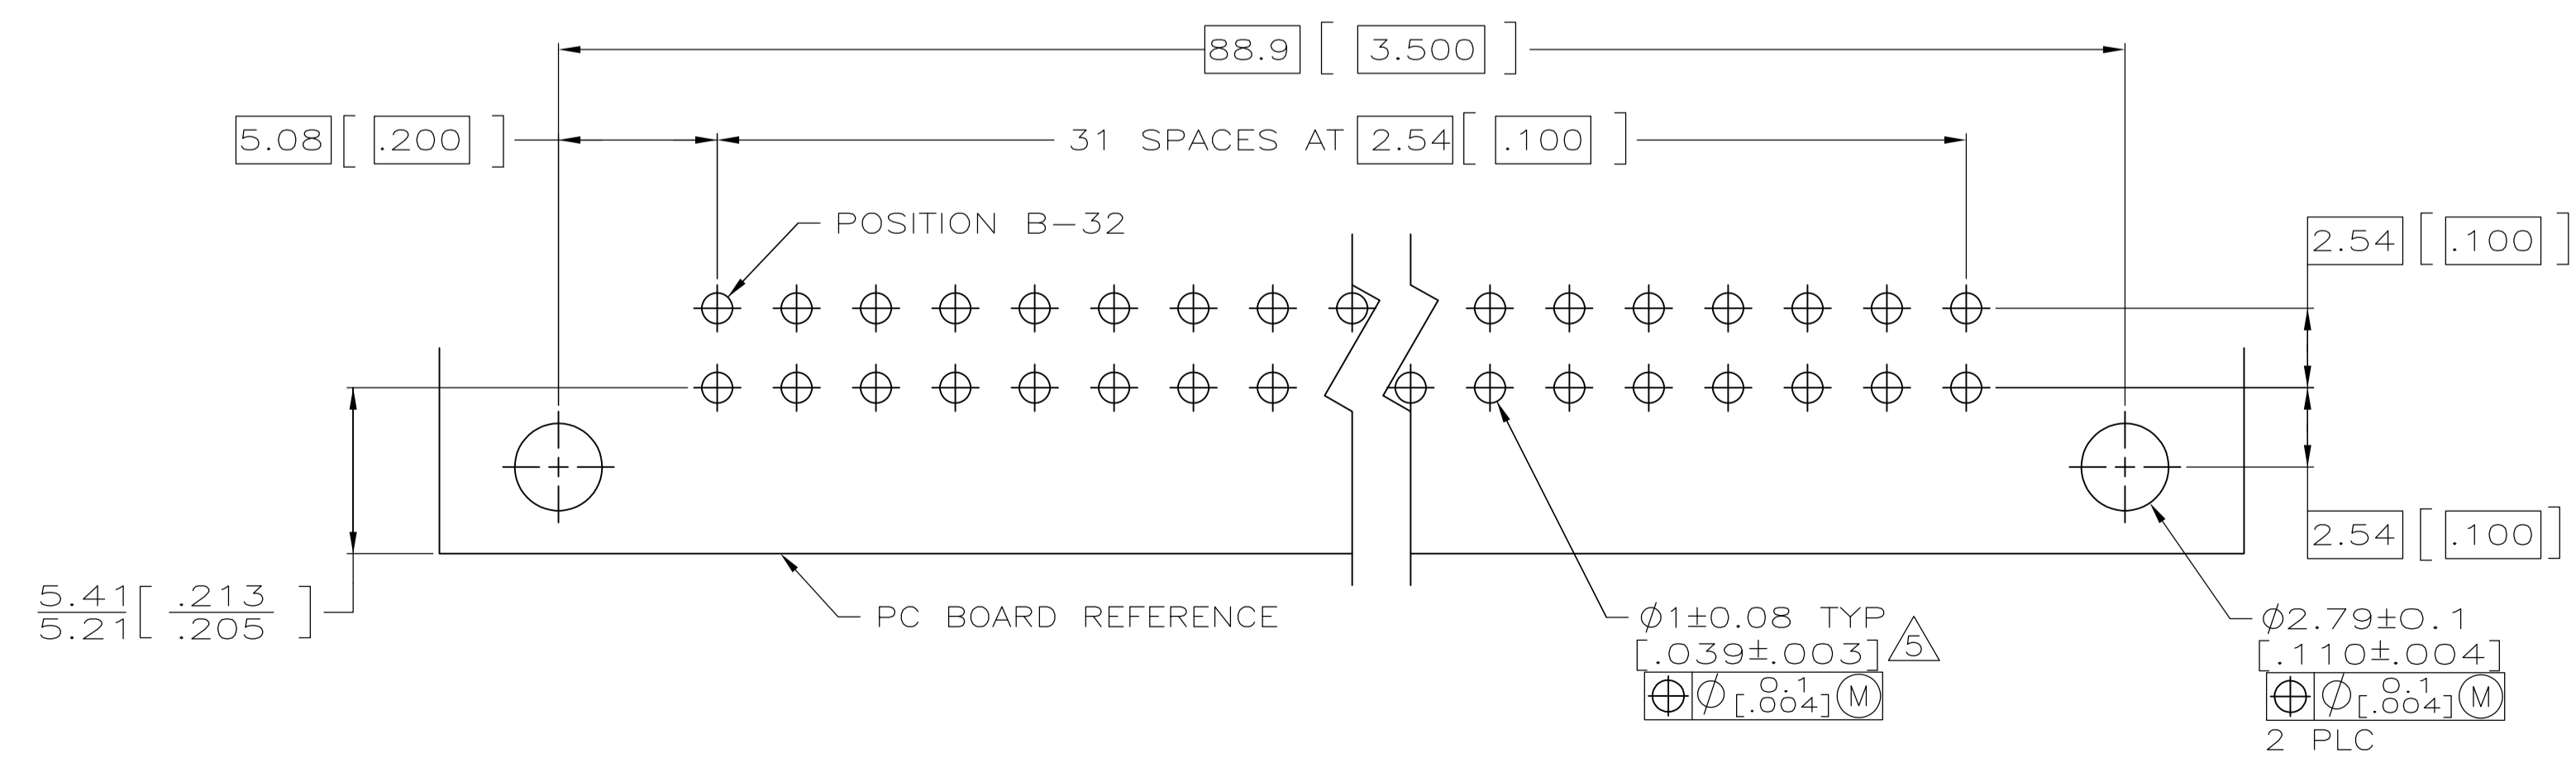

PC BOARD LAYOUT

1-32	X	X	64	5536052-5
POSITIONS LOADED	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
	ROWS LOADED			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE DSMAYOS		TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE DSMAYOS NAME	
0 PLC	±	±	±	ASSEMBLY, PIN, EUROCARD, TYPE B, 64 POSITION, 2.64[.104] SOLDER POST	
1 PLC	±	±	±	APPLICATION SPEC	
2 PLC	±	±	±	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
3 PLC	±	±	±	A1 00779 C=5536052	
4 PLC	±	±	±	WEIGHT	
ANGLES	±	±	±	CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV P	