


PC BOARD LAYOUT
 RECOMMENDED PC BOARD THICKNESS 1.57[.062]

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

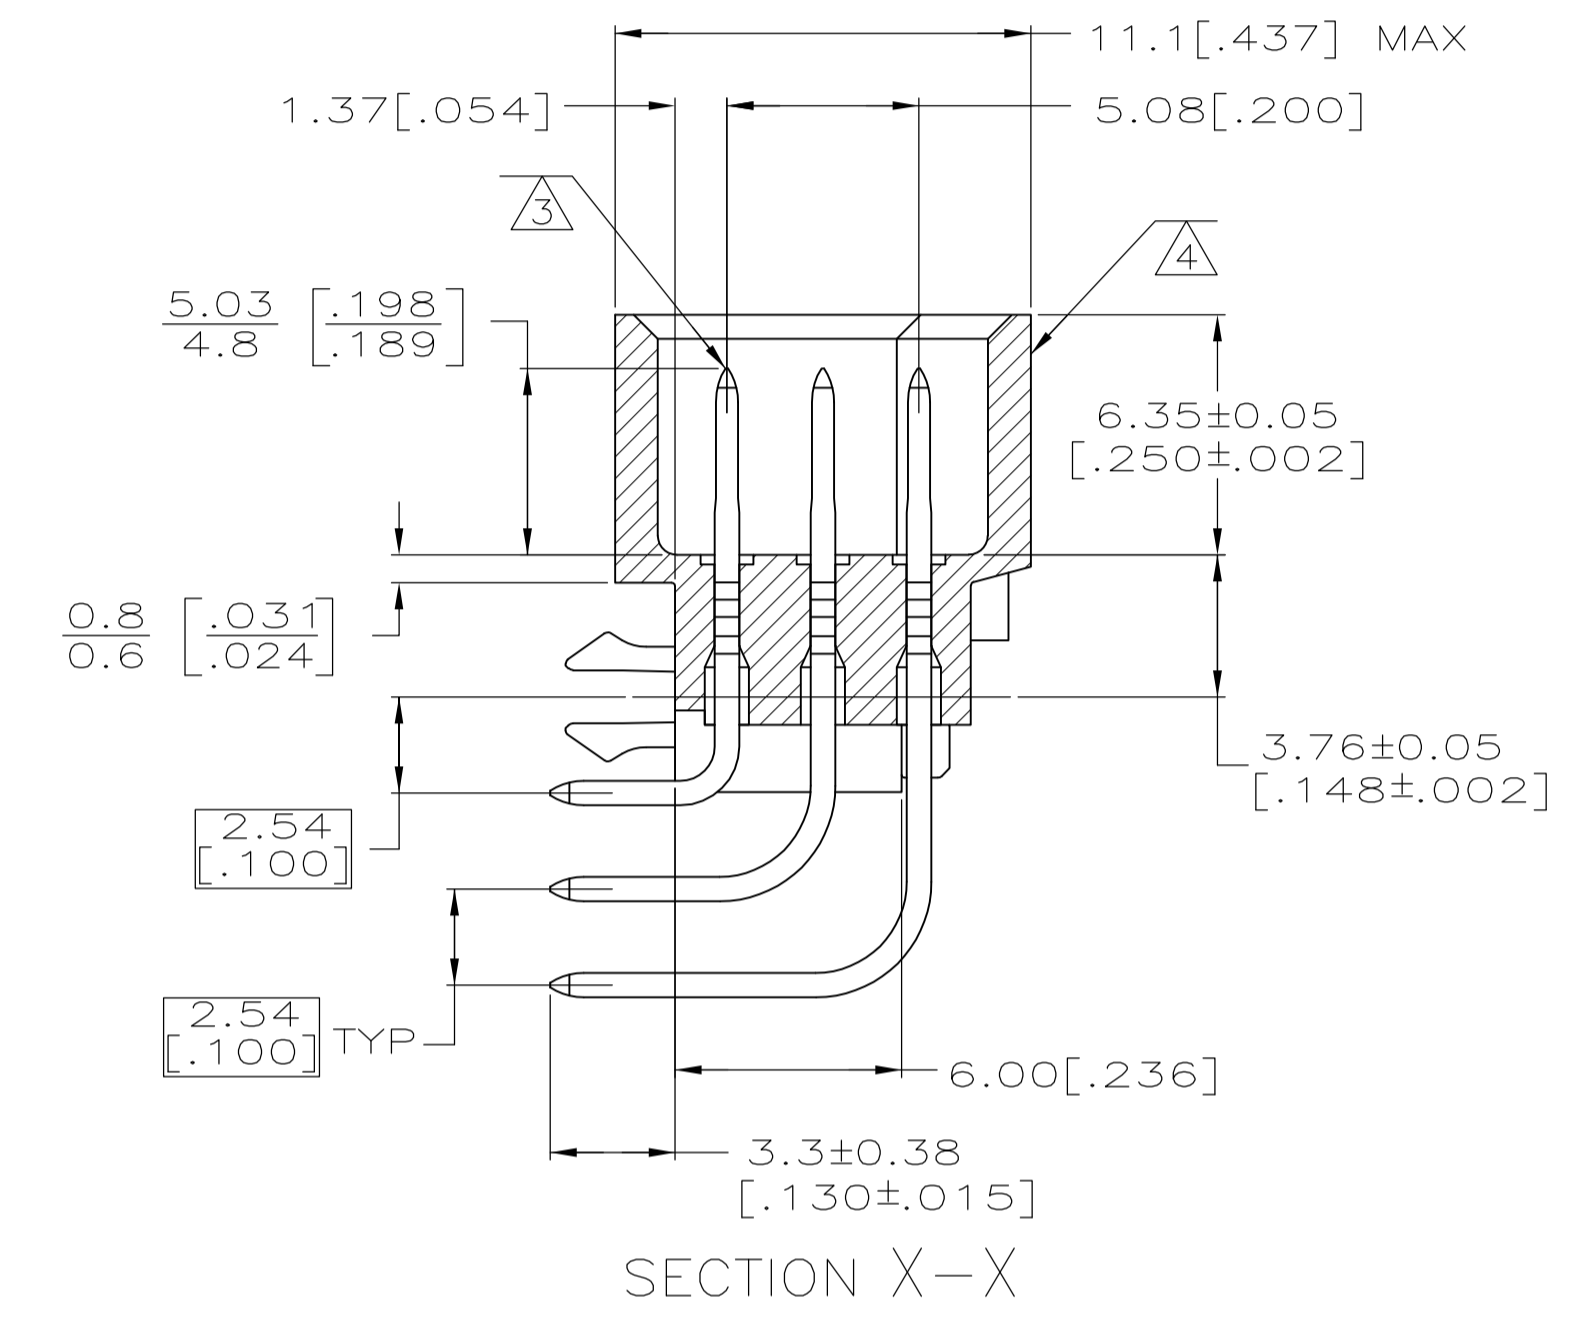

1-32	X	X	X	96	5536405-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE CIRK A. SHARPE APVD A. SHARPE		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		± - ± 0.13[.005] ± - ± - ± -		ASSEMBLY, PIN, EUROCARD, TYPE C, 96 POSITION, 3.30[.130] SOLDER POST, WITH BOARD-LOCKS	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO	
△ △		△		A1 00779 5536405	
CUSTOMER DRAWING				RESTRICTED TO	
				SCALE 5:1 SHEET 1 OF 1 REV 01	