
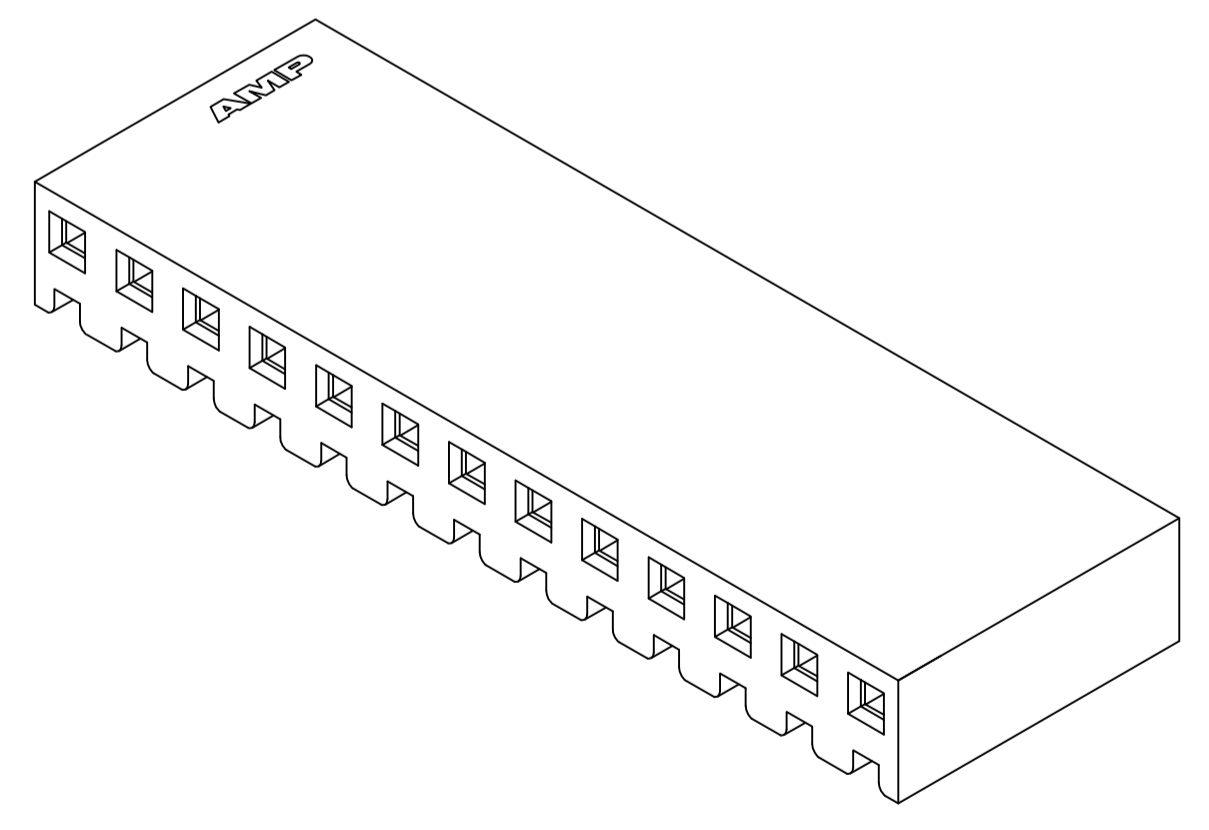
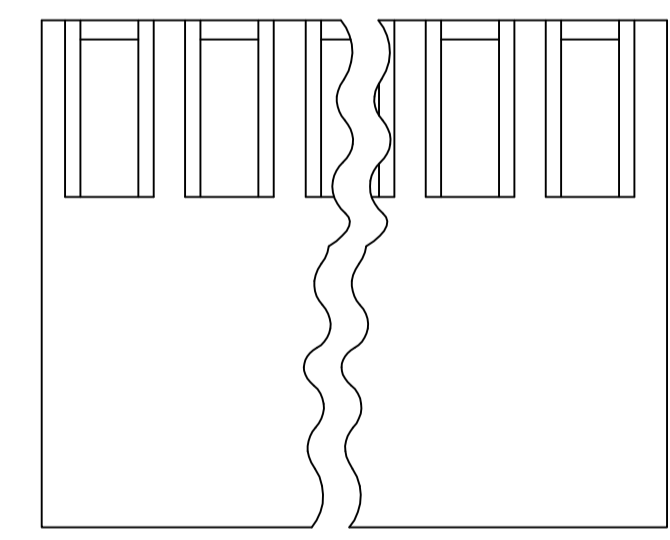
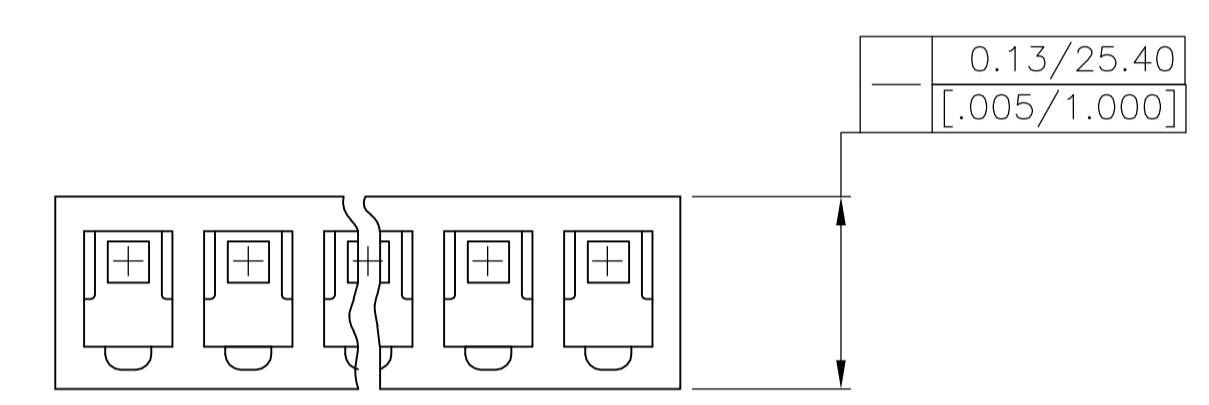
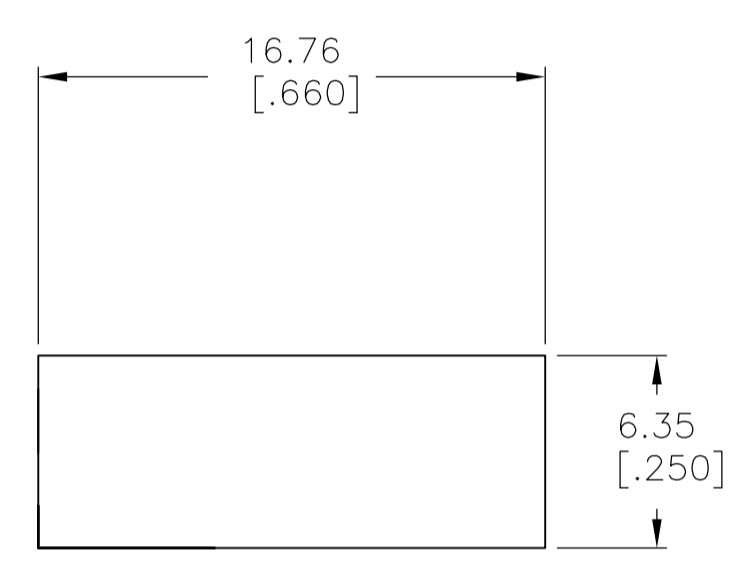


- 1 UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 CIRCUIT I.D. NUMBER(S), TO BE LOCATED SEQUENTIALLY AS SHOWN.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 ACCEPTS UP TO .110 INCH INSULATION WIRE.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

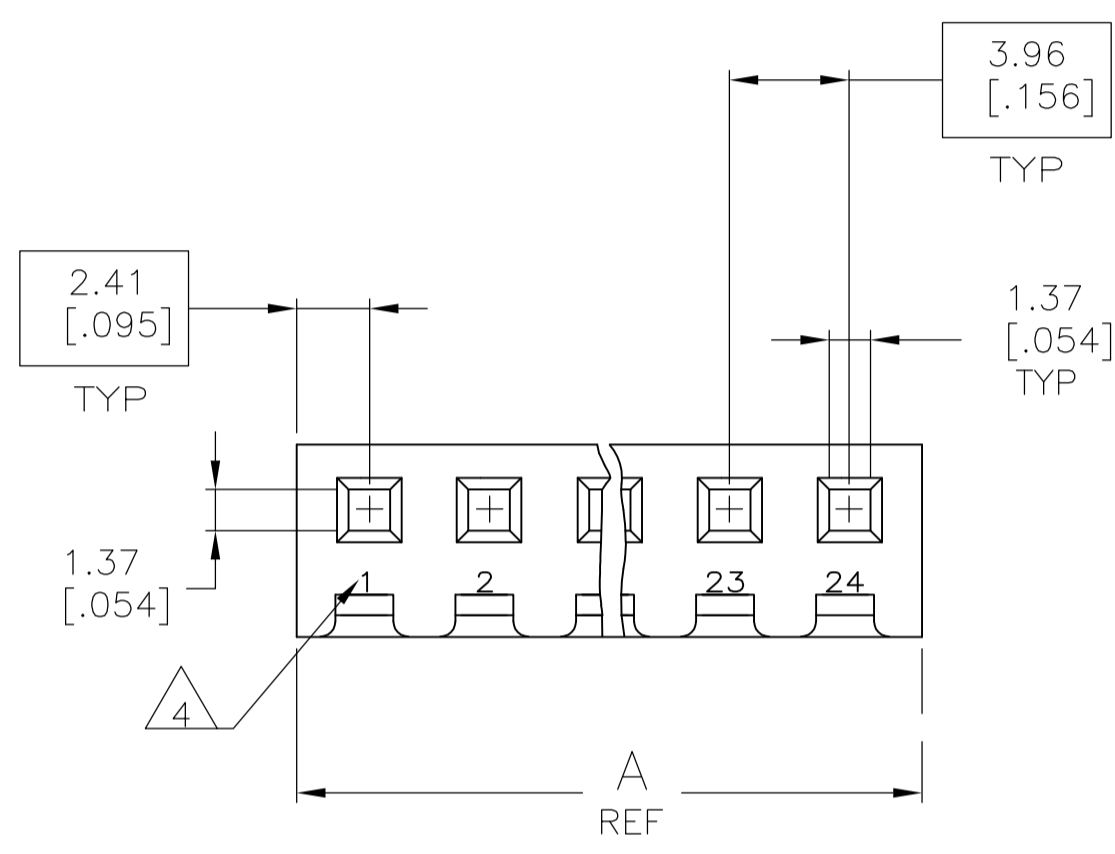

3-DIMENSIONAL MODEL NTS

	OBSOLETE	95.96	[3.778]	24	2-647400-4
	OBSOLETE	92.00	[3.622]	23	2-647400-3
		88.04	[3.466]	22	2-647400-2
	OBSOLETE	84.07	[3.310]	21	2-647400-1
	OBSOLETE	80.11	[3.154]	20	2-647400-0
	OBSOLETE	76.15	[2.998]	19	1-647400-9
	OBSOLETE	72.19	[2.842]	18	1-647400-8
	OBSOLETE	68.22	[2.686]	17	1-647400-7
	OBSOLETE	64.26	[2.530]	16	1-647400-6
	OBSOLETE	60.30	[2.374]	15	1-647400-5
		56.34	[2.218]	14	1-647400-4
	OBSOLETE	52.37	[2.062]	13	1-647400-3
	OBSOLETE	48.41	[1.906]	12	1-647400-2
	OBSOLETE	44.45	[1.750]	11	1-647400-1
		40.49	[1.594]	10	1-647400-0
	OBSOLETE	36.53	[1.438]	9	647400-9
	OBSOLETE	32.56	[1.282]	8	647400-8
	OBSOLETE	28.60	[1.126]	7	647400-7
	OBSOLETE	24.64	[.970]	6	647400-6
	OBSOLETE	20.68	[.814]	5	647400-5
	OBSOLETE	16.71	[.658]	4	647400-4
	OBSOLETE	12.75	[.502]	3	647400-3
	OBSOLETE	8.79	[.346]	2	647400-2
	OBSOLETE	4.83	[.190]	1	647400-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN L. McEACHIN 28MAR00		TE Connectivity	
DIMENSIONS: mm [INCHES]		CIK: J. ELLIS 28MAR00			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. ELLIS 28MAR00		NAME: HOUSING, SL-156, FOR LARGE WIRE INSULATION	
0 PLC ± -		APPLICATION SPEC		SIZE: A1	
1 PLC ± -		RESTRICTED TO		CAGE CODE: 00779	
2 PLC ± -		WEIGHT: -		DRAWING NO: 647400	
3 PLC ± 0.13 [.005]		CUSTOMER DRAWING		SCALE: 4:1	
4 PLC ± -		SHEET 1 OF 1		REV C	
ANGLES ± 0° 30'					
MATERIAL: NYLON,UL94V-0,NAT					
FINISH: -					