

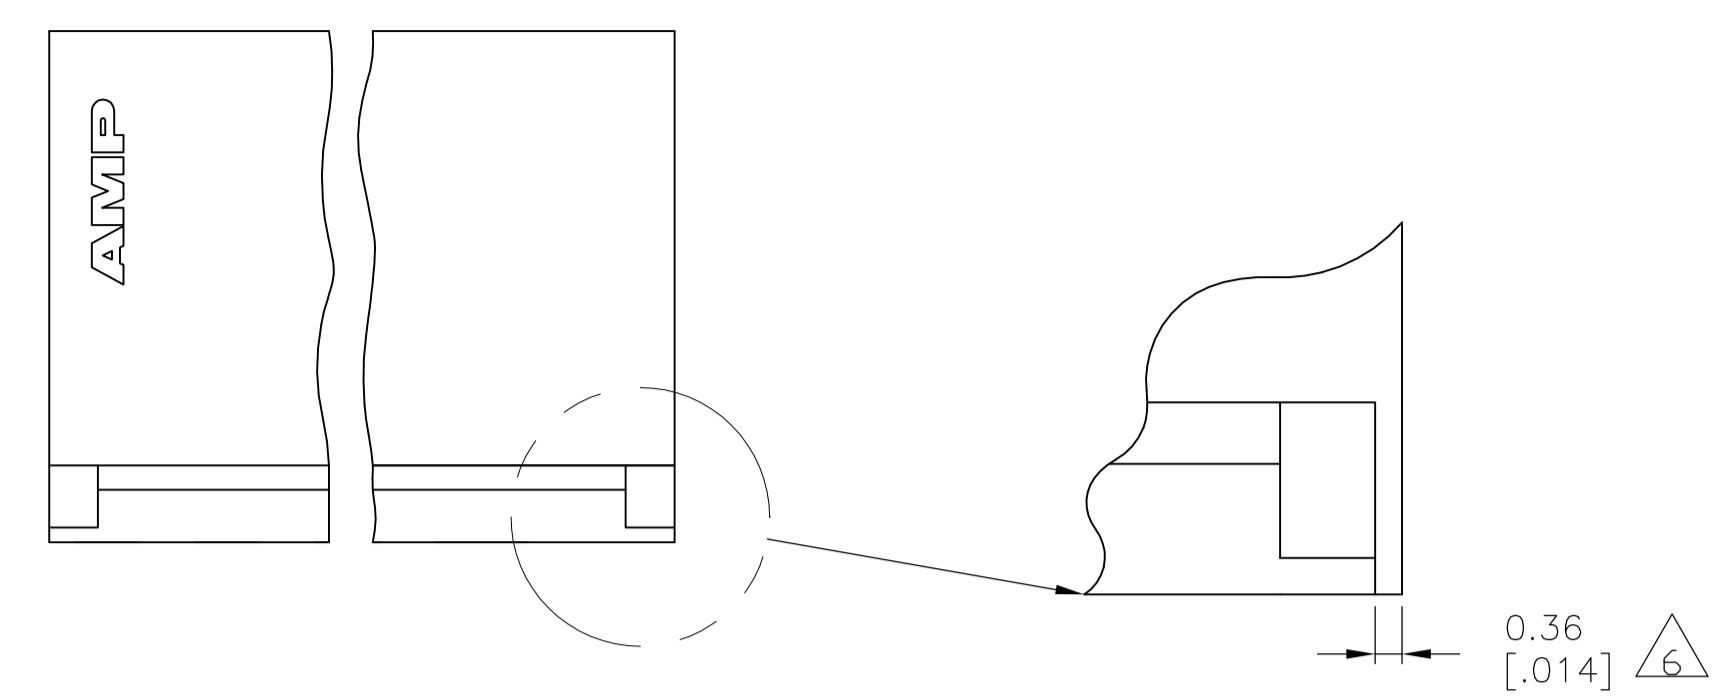
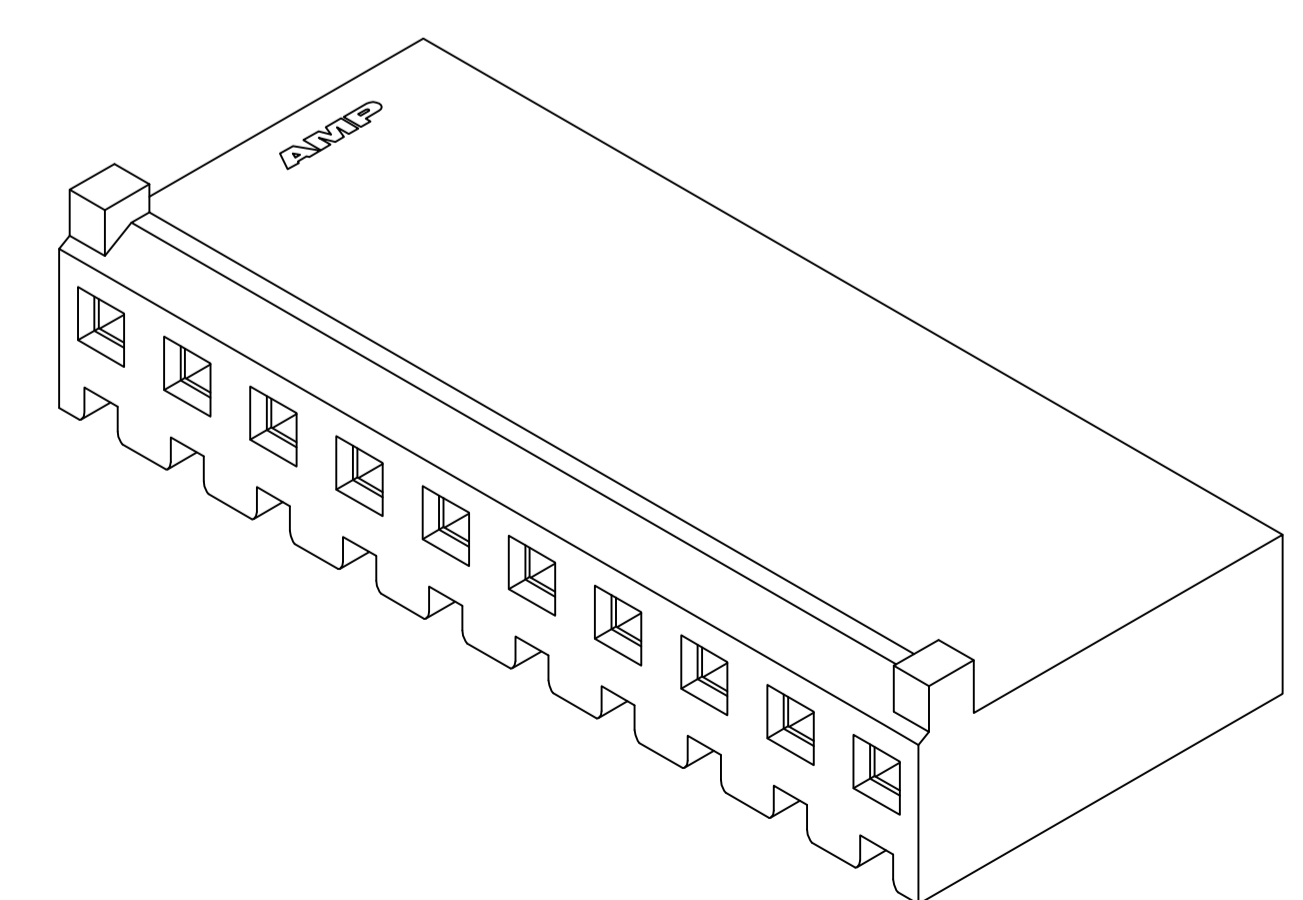


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
C		REVISED PER ECO-12-007810	28JUL12	KH	SM		

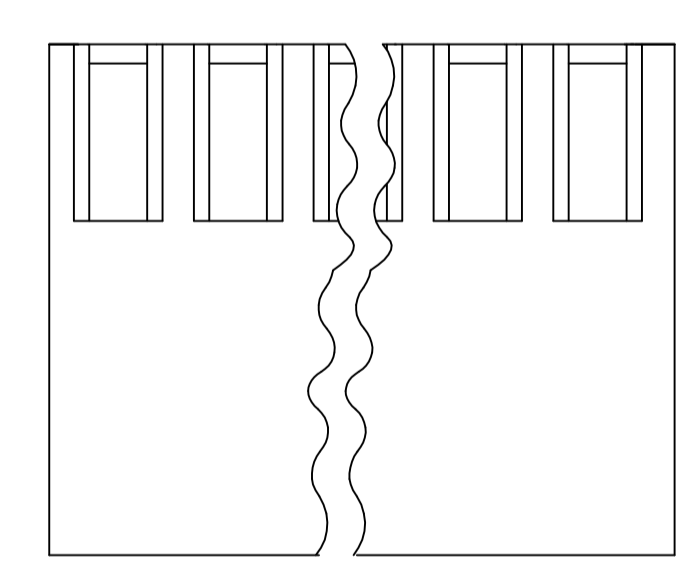

SCALE 10:1

- 1 UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 CIRCUIT I.D. NUMBER(S), TO BE LOCATED SEQUENTIALLY AS SHOWN.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 OPTIONAL CONSTRUCTION (BOTH CORNERS) UP TO 0.38 [.015] FOR P/N -1 THRU -5, UP TO 1.27 [.050] FOR P/N -6 THRU 2--4.
- 7 ACCEPTS UP TO .110 INCH INSULATION WIRE.

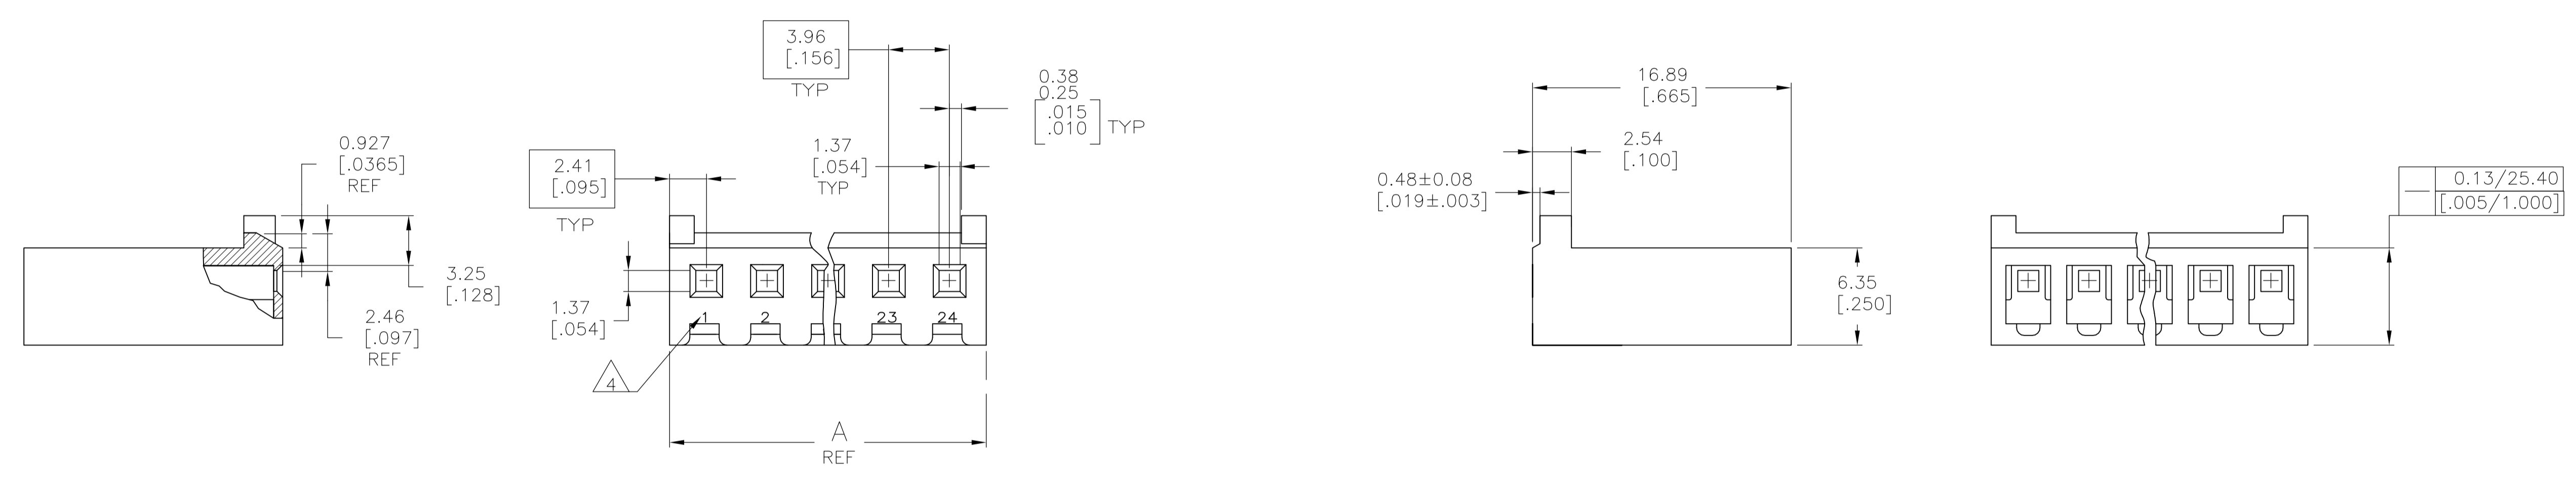

3-DIMENSIONAL MODEL NTS

DIM A	NO. OF CIRCUITS	PART NUMBER
95.96 [3.778]	24	2-647402-4
92.00 [3.622]	23	2-647402-3
88.04 [3.466]	22	2-647402-2
84.07 [3.310]	21	2-647402-1
80.11 [3.154]	20	2-647402-0
76.15 [2.998]	19	1-647402-9
72.19 [2.842]	18	1-647402-8
68.22 [2.686]	17	1-647402-7
64.26 [2.530]	16	1-647402-6
60.30 [2.374]	15	1-647402-5
56.34 [2.218]	14	1-647402-4
52.37 [2.062]	13	1-647402-3
48.41 [1.906]	12	1-647402-2
44.45 [1.750]	11	1-647402-1
40.49 [1.594]	10	1-647402-0
36.53 [1.438]	9	647402-9
32.56 [1.282]	8	647402-8
28.60 [1.126]	7	647402-7
24.64 [0.970]	6	647402-6
20.68 [0.814]	5	647402-5
16.71 [0.658]	4	647402-4
12.75 [0.502]	3	647402-3
8.79 [0.346]	2	647402-2
4.83 [0.190]	1	647402-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN L. McEACHIN 28MAR00	APVD J. ELLIS 28MAR00	NAME
0. PLC ± -	1. PLC ± -	2. PLC ± -	3. PLC ± 0.13 [.005]	4. PLC ± -
ANGLES ± ± 0° 30'		MATERIAL NYLON, UL94V-0, NAT FINISH -		

STE TE Connectivity

HOUSING WITH LOCKING RAMP AND POLARIZING TABS, FOR LARGE WIRE INSULATION, SL-156

SIZE A1 00779 C=647402

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV C