


GAGE DIMENSIONS APPLY WHEN TOOL IS BOTTOMED BUT NOT UNDER PRESSURE.

FOR REPLACEMENT OF PARTS OTHER THAN LISTED, TOOL SHOULD BE RETURNED TO OUR FACTORY TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.

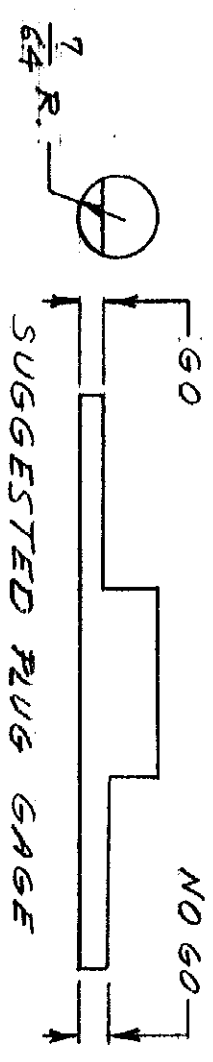

"W" DIM.	NO 60
.076	.082

QTY	DWG NUMBER	NAME	REMARKS	ITEM NO
2	21045-6	RING - RETAINING		6
1	300449	PIN - RETAINING		5
1	39364	SPRING		4
1	39366	COLLAR		3
2	300432	PIN - RETAINING		2
4	21045-3	RING - RETAINING		1

REV	DESCRIPTION	BY	CHK	DATE
F-1	REVISED	PZ		10-28-62
E	REVISED	BS		7-16-62
E	REVISED	BWS	CM	4-15-62
D	REVISED	CM	CM	3-27-62
C	REVISED	RM	RF	2-15-62
UTB	REVISION RECORD	DR	CHK	DATE

NO	DESCRIPTION	NUMBER
1		49965

APPROVED: *[Signature]* 4-24-62
 DE: *[Signature]* 6-13-62
 APP: *[Signature]* 6-13-62

© 1959 AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

MATERIAL AND FINISH: *1/1*

WIRE - RANGE - INSULATION: 12-10
 TOLERANCE EXCEPT AS NOTED: ± 1%
 SCALE: 1/2"
 LOC: M
 NO: 49965
 REV: F-1

CLASS: *1/1*

TYPE: W FLAG

NAME: HAND TOOL ASSEMBLY

A

B

C

D

8 7 6 5 4 3 2 1