


RECOMMENDED PC BOARD LAYOUT

- △ HOUSING: GLASS-FILLED POLYMER.  
POST: COPPER ALLOY.
- △ POST: DIN 41612 CLASS 2 IN CONTACT AREA, TIN PLATE ON POSTS.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- △ MARKINGS ON THIS SIDE.
- △ THE 5.69 [.224] LONG MAKE FIRST POSTS EXCEED THE ALIGNMENT CAPABILITY OF THE HOUSING AND COULD POSSIBLY STUB DURING MATING. CUSTOMER MUST TAKE THIS INTO CONSIDERATION IN CARD CAGE DESIGN.

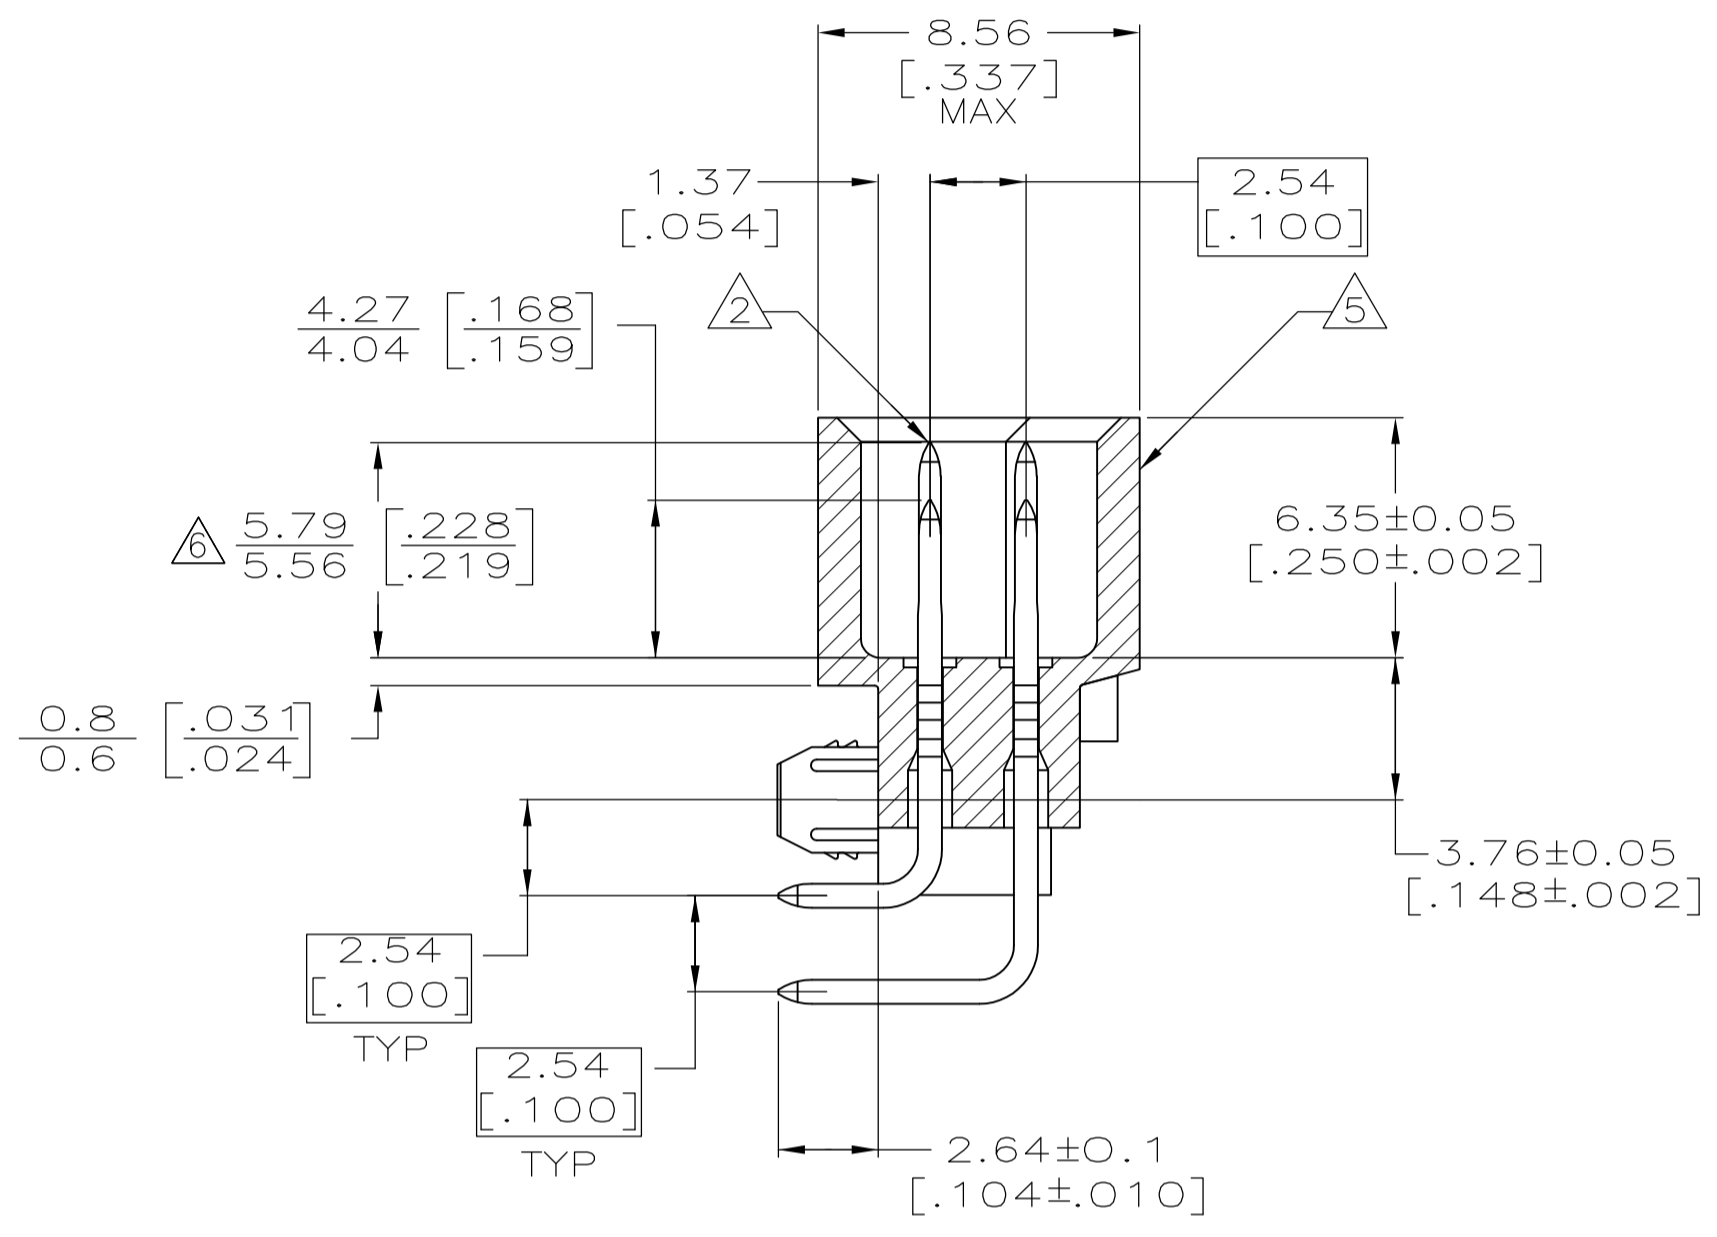

SECTION Z-Z

1-3,6-15,18,20-23,25,31,32	4,5,16,17,19,24,26-30	B	32	5148528-1
2,3,6,7,11-14,16,20-24,29-31	1,4,5,8-10,15,17-19,25-28,32	A	32	
POSITIONS LOADED WITH 5.69 [.224] CONTACTS △	POSITIONS LOADED WITH 4.16 [.164] CONTACTS	ROWS	NO OF LOADED POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± 0.13 [.005]	3 PLC ± -	4 PLC ± -	ANGLES ± -
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
			A1	00779	5148528		

CUSTOMER DRAWING SCALE 5:1 SHEET 1 OF 1 REV 01