
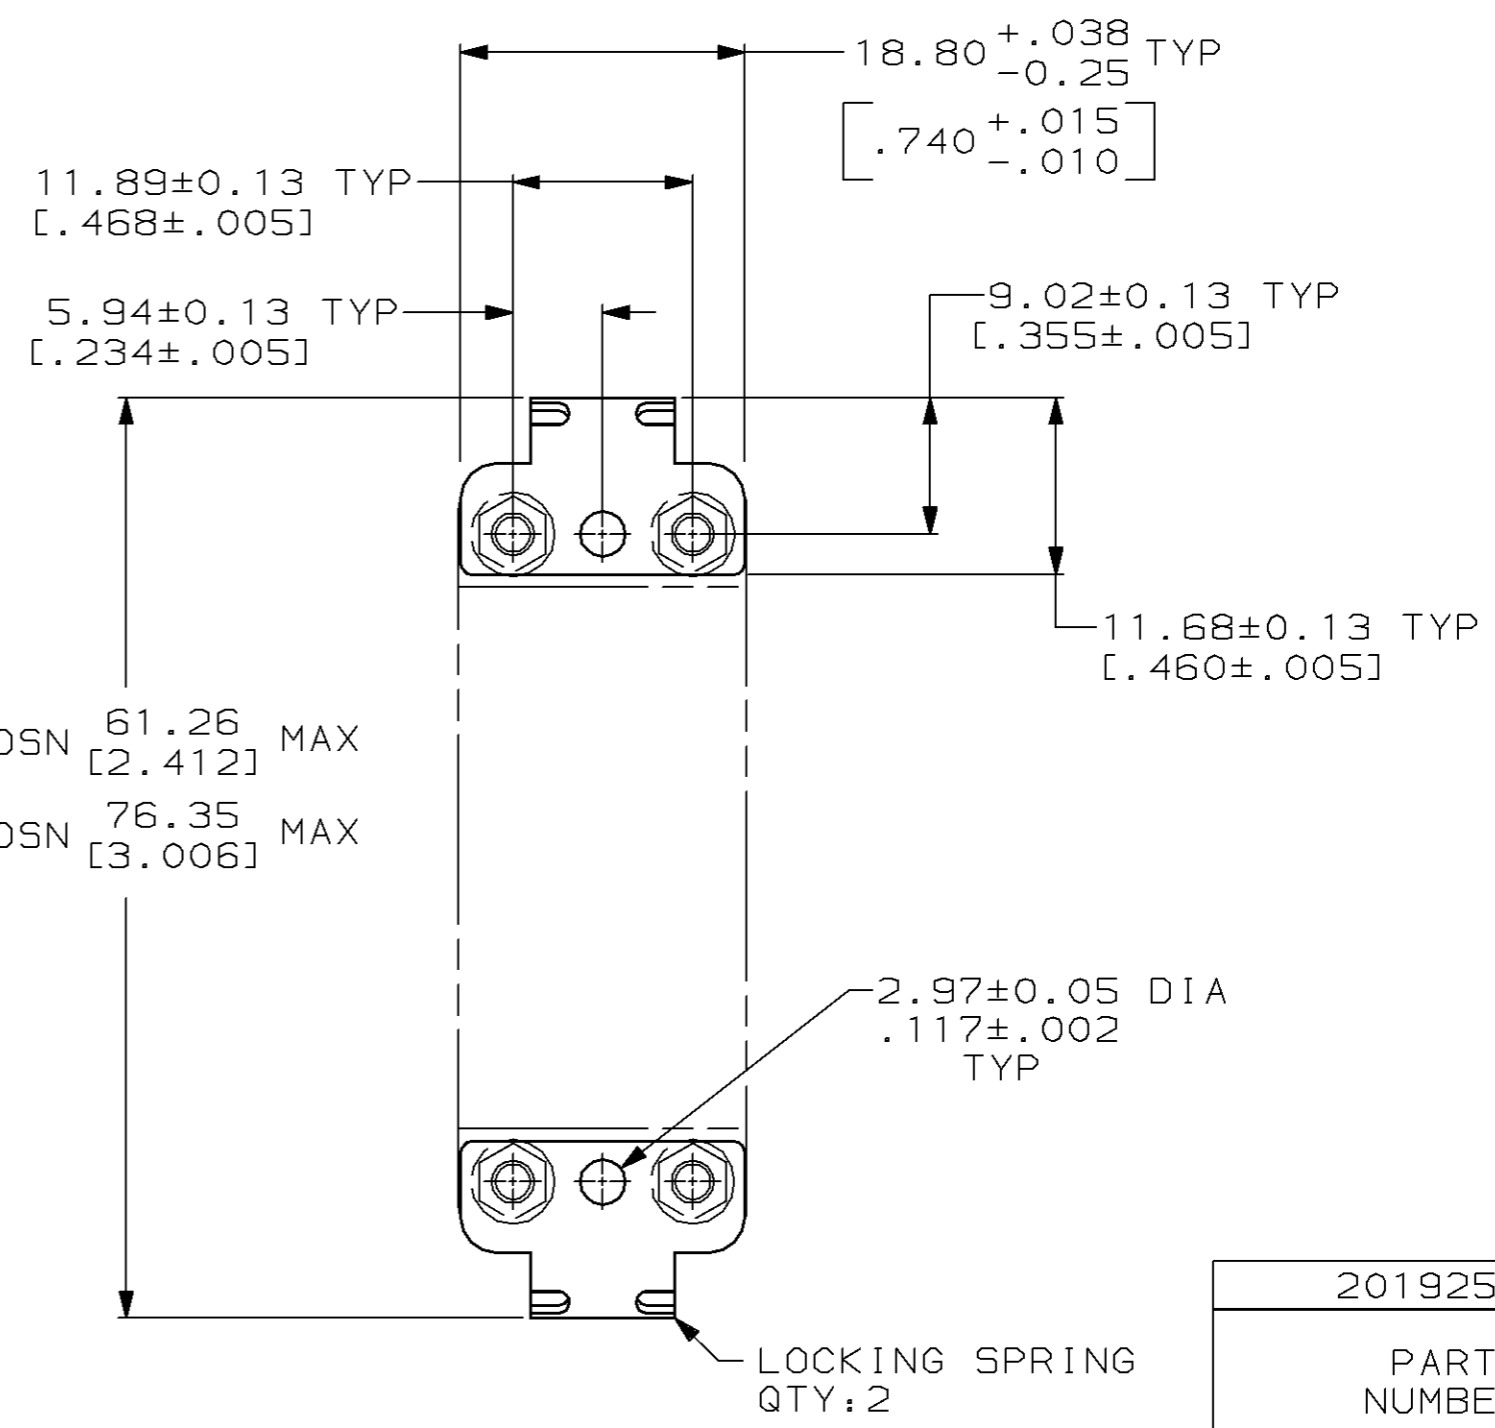


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
BD	36	H	REDRAWN WITHOUT CHANGE	21 SEP 95	-
			PER EC 0020-1084-95		

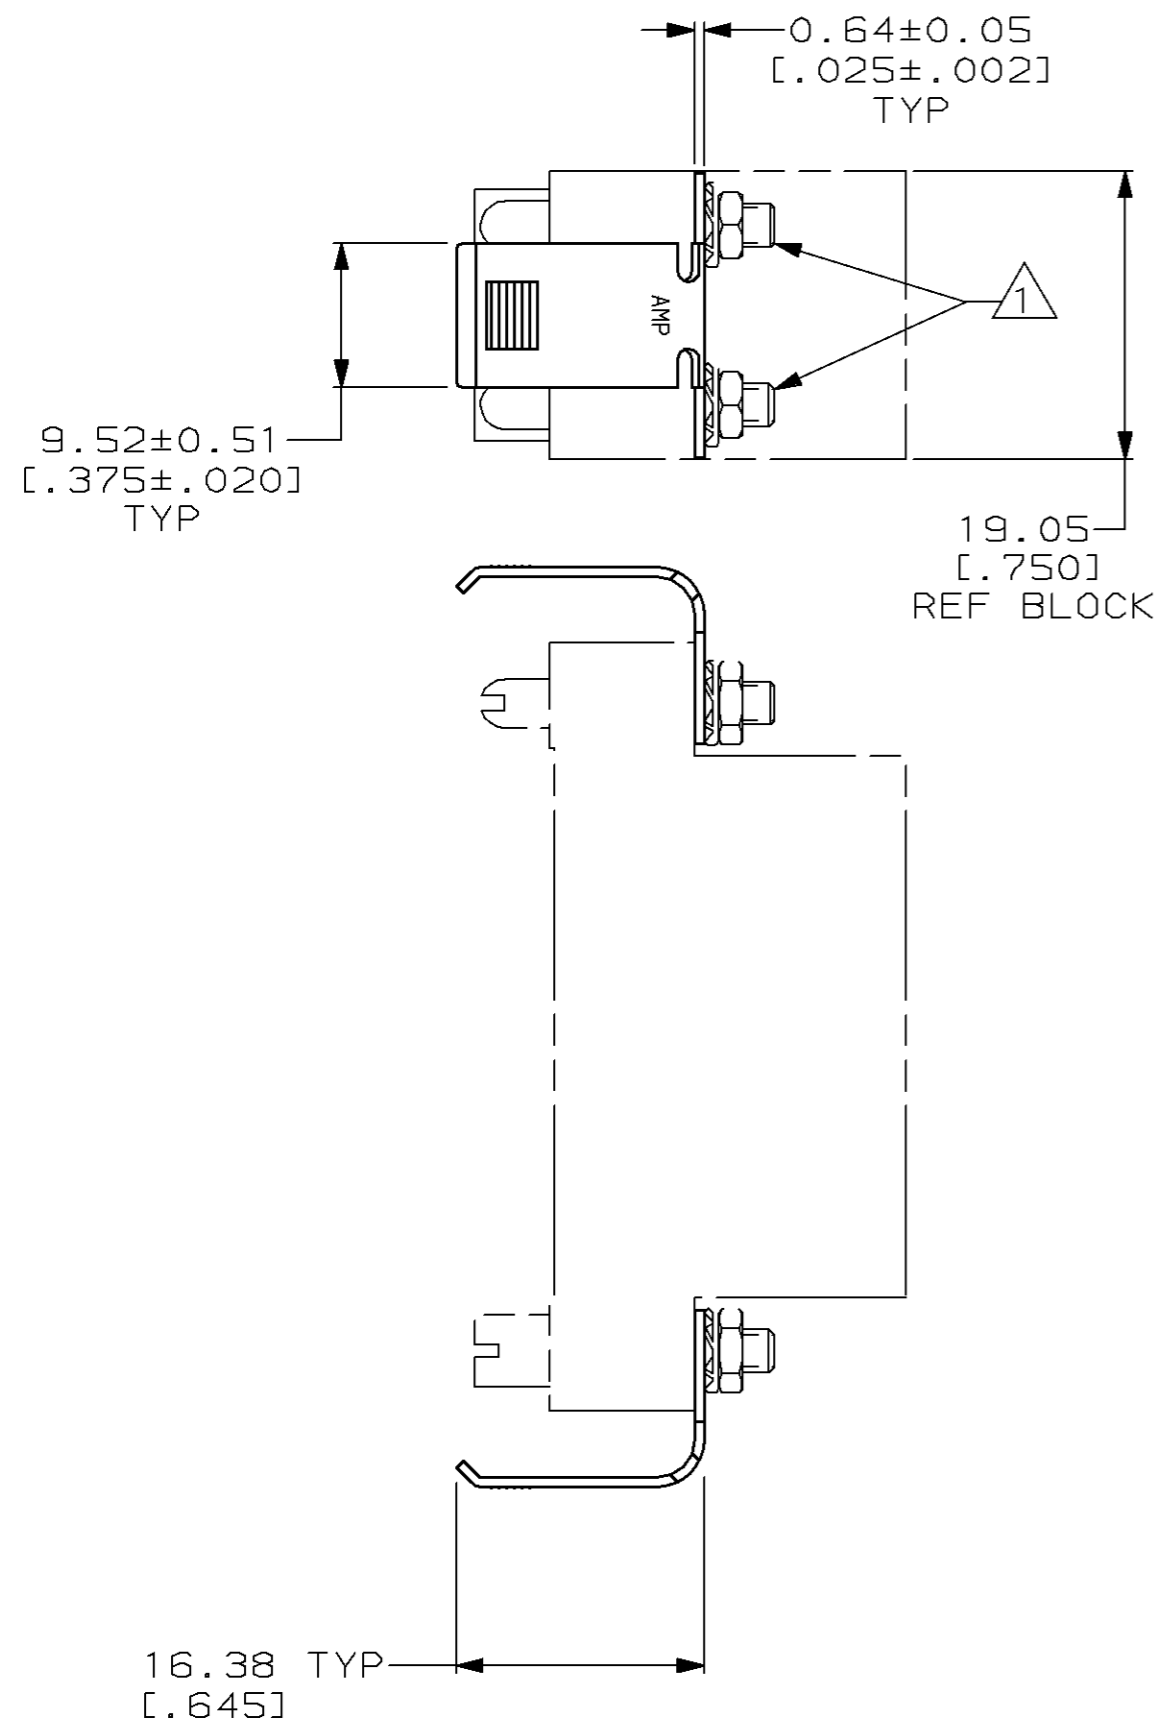

34 POSN 61.26 MAX  
 [2.412]  
 50 POSN 76.35 MAX  
 [3.006]

201925-1  
 PART NUMBER

1 SECURED WITH GUIDE PIN & OR SOCKET.  
 SEE INSTRUCTION SHEET NO 1409.  
 2. FOR MATING PART (SPRING CATCH), SEE 201926.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	D. HARDY	21 SEP 95	<b>AMP</b>	AMP Incorporated	
DIMENSIONS: mm [INCHES]		CHK	R. STONE	21 SEP 95		Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	G. STEINHAUER	03 OCT 95	NAME		
0 PLC ±-		PRODUCT SPEC		LOCKING SPRING KIT, UNASSEMBLED, 34 & 50 POSN BLOCK, M SERIES			
1 PLC ±-		APPLICATION SPEC		SIZE			
2 PLC ±0.38 [.015]		-		CAGE CODE		DRAWING NO	
3 PLC ±-		-		A3		C-201925	
4 PLC ±-		-		00779		SCALE 2:1	
ANGLES ±-		-		CUSTOMER DRAWING		SHEET 1 OF 1	
MATERIAL	FINISH	WEIGHT		-		REV H	
CARBON STEEL	NICKEL PLATED	-		-			