


WGC NO. 603225

UNIT OF MEASURE	A	B	C	D	E	L		MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.393	.501	.299	.325	.063	8.93		2.0	120 lbs.
MM	9.98	12.72	7.59	8.26	1.60	226.		50.8	54.43 kg.

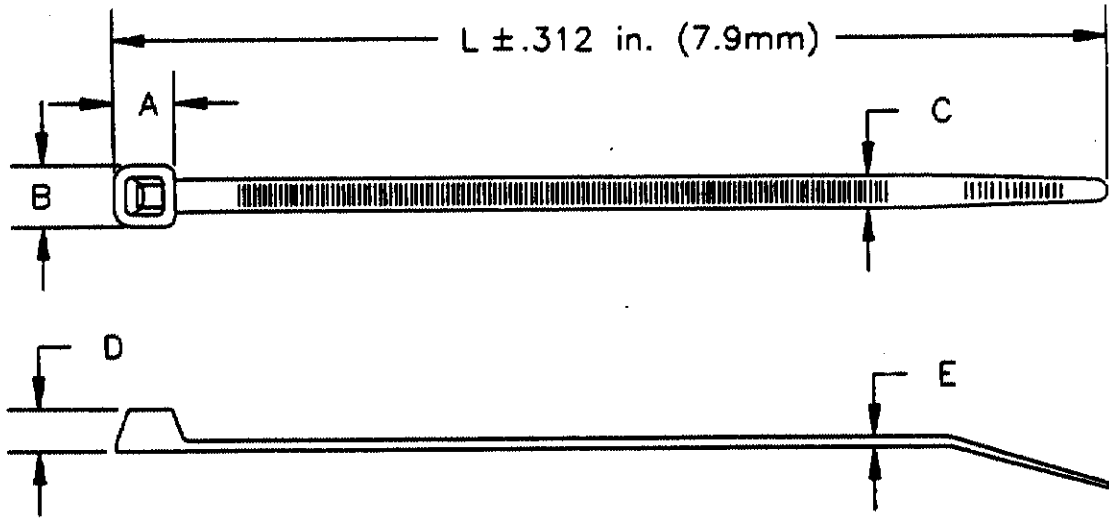

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
 2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
- ⚠ OBSOLETE
 ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Allen*

CUSTOMER DRAWING UNPUBLISHED

	3-603225-9	NATURAL 500 TY2HL	
	3-603225-0 ⚠	BLACK 500 TY2HLB	
	4-603225-9 ⚠	NATURAL 50 TY2HD	
	4-603225-0	BLACK 50 TY2HDB	

LOC 0		DWG SIZE	PART No.	DESCRIPTION	ITEM NO
DIST 1		REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)			
	QTY. REQ'D. PER ASSY.	PARTS LIST			
		MATERIAL NYLON 6/6	HEAT TREAT	FINISH	
		DIMENSIONS ARE IN INCHES	DRAWN BY: AD-TEK/VL	DATE: 6/25/90	APPROVED BY:
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PL DEC ± 3 PL DEC ± .039 4 PL DEC ±	CHECK BY: BJM 6/90	RELEASE: J. Hamed 6/90	
		ANGLES ± SURF TEXTURE: J	AMP AMP INCORPORATED Harrisburg, Pa.		
	B1	REVISED PER ECO-09-026444	AEG	28NOV 09	NAME: HEAVY DUTY CABLE TIE 8-7/8 INCH
	✓ B	ECN 062890	Jar	6/90	REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.
P	F	LTR	APC	DATE	SCALE: A
		REVISION RECORD		DRAWING No.: 603225	SHEET: 1 OF 1
					REV.: B1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.