

LOC
A1


DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-15-007468	09JUN2015	GSK	JB



PN 0-1 As Shown

Contact arrangement
view from connecting side

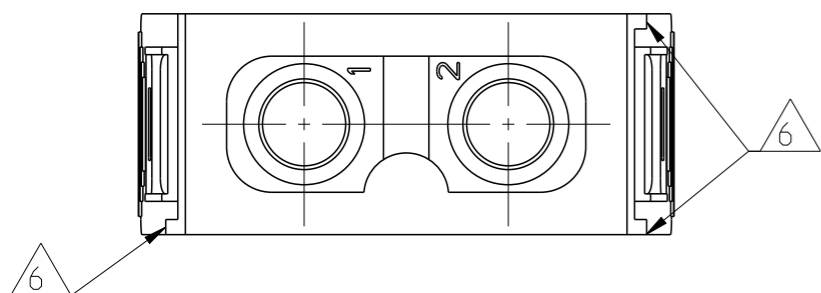


NOTES


- 1 SUITABLE CRIMP CONTACTS: SERIES HSK
CUSTOMER DRAWING: 1108756
OUTER DIMENSIONS OF INSULATION: MAX. Ø8mm
- 2 SUITABLE MODULE FIXING FRAME: SERIES HVS SIZE 3 TO 8
CUSTOMER DRAWING: 1103250
- 3 SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
- 4 SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
- 5 STANDARDS:
DIN EN 61984; DIN EN 60664-1
- 6 POLARIZATION RIPS
- 7 MARKING OF POLARIZATION ACCORDING TO MARKING OF
MODULE FRAME
- 8 PACKAGING:
10 PIECES IN A CARTON

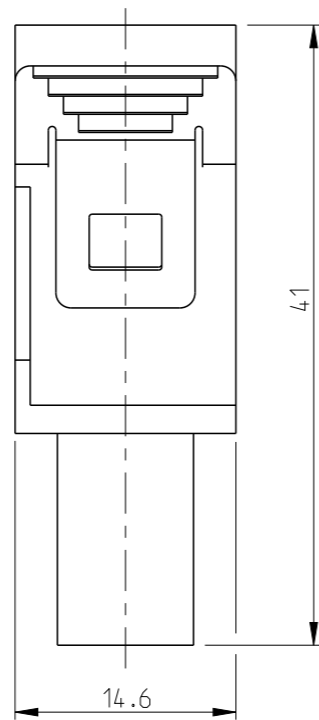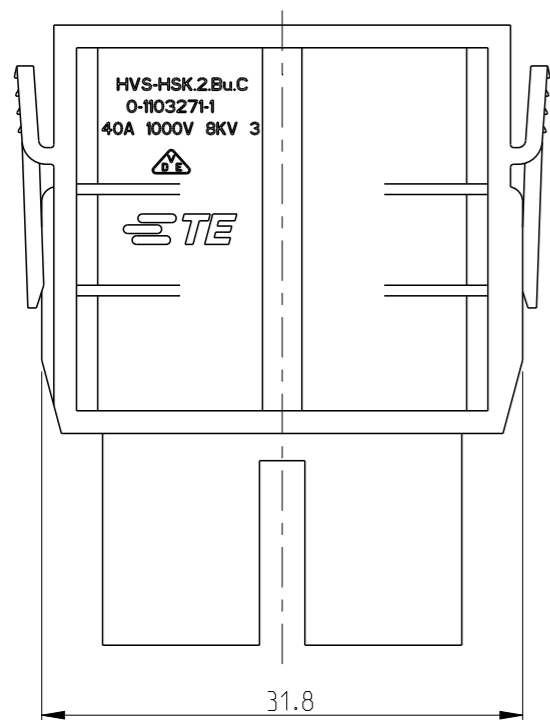

PN 0-1 As Shown

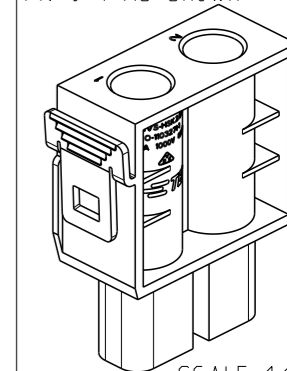

Contact arrangement
view from termination side

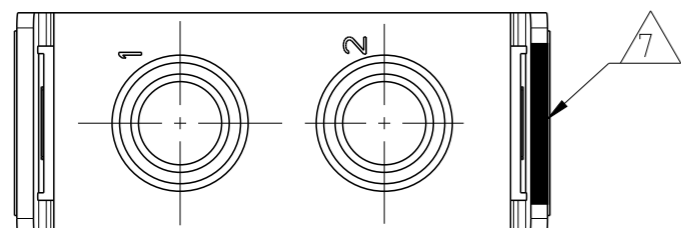

1	DESCRIPTION	MATERIAL	COLOR	ITEM NO
0-1	FEMALE INSERT	PBT-GF10	LIGHT GREY	1

HVS-HSK.2.BU.C				
STC TE Connectivity				
NAME FEMALE INSERT ASSY HVS-HSK.2.BU.C				
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A3	00779	©-1103271		
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SCHNEIDER 20.02.2006
		CHK A.GAST 20.02.2006
		APVD T.SCHNURPFIL 20.02.2006
DIMENSIONS: mm		PRODUCT SPEC 108-74081
TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 8075 DIN 150 2768 mm-E DIN 16901-120		APPLICATION SPEC 114-74083
0 PLC ±	1 PLC ±	WEIGHT 0.008 kg
2 PLC ±	3 PLC ±	
4 PLC ±	ANGLES ±	
MATERIAL	FINISH	
9	10	