


- △ MATERIAL:  
 HOUSING - HIGH TEMPERATURE THERMOPLASTIC, BLACK, UL94V-0.  
 TERMINALS - 0.36[.014] THICK PHOS BRONZE PLATED WITH 3.81µm[.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA. 1.27µm [0.00050] MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27µm [0.00050] MINIMUM THICK NICKEL.  
 SHIELD - 0.196[.0077] THICK COPPER ZINC ALLOY PREPLATED WITH 1.27µm[.000050] MINIMUM SATIN NICKEL WITH 2.03µm[.000080] MINIMUM TIN POST DIPPED ON PCB GROUND TABS.  
 LIGHT EMITTING DIODE (LED) - DIFFUSED EPOXY LENS, 0.51 x 0.51[.020 x .020] CARBON STEEL WIREFRAME LEADS PREPLATED WITH 8.89 µm[.0003500] THICK Sn/Cu OVER 2.03 µm[.000080] THICK Ag OVER 1.02µm[.000040] THICK Cu OVER 3.56 µm[.000140] THICK Ni OVER 1.02µm[.000040] Cu UNDERPLATE
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
  - △ SUGGESTED PANEL OPENING DIMENSIONS.
  - △ SUGGESTED CLEARANCE BETWEEN TOP OF CONNECTOR AND TOP PANEL OPENING.
  - 0.051[.002] WHITE POLYESTER INSULATOR APPLIED TO BACK OF HOUSING.
  - △ SEE TABLE FOR COLOR OF LEDS AND NUMBER REQUIRED.
  - THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.

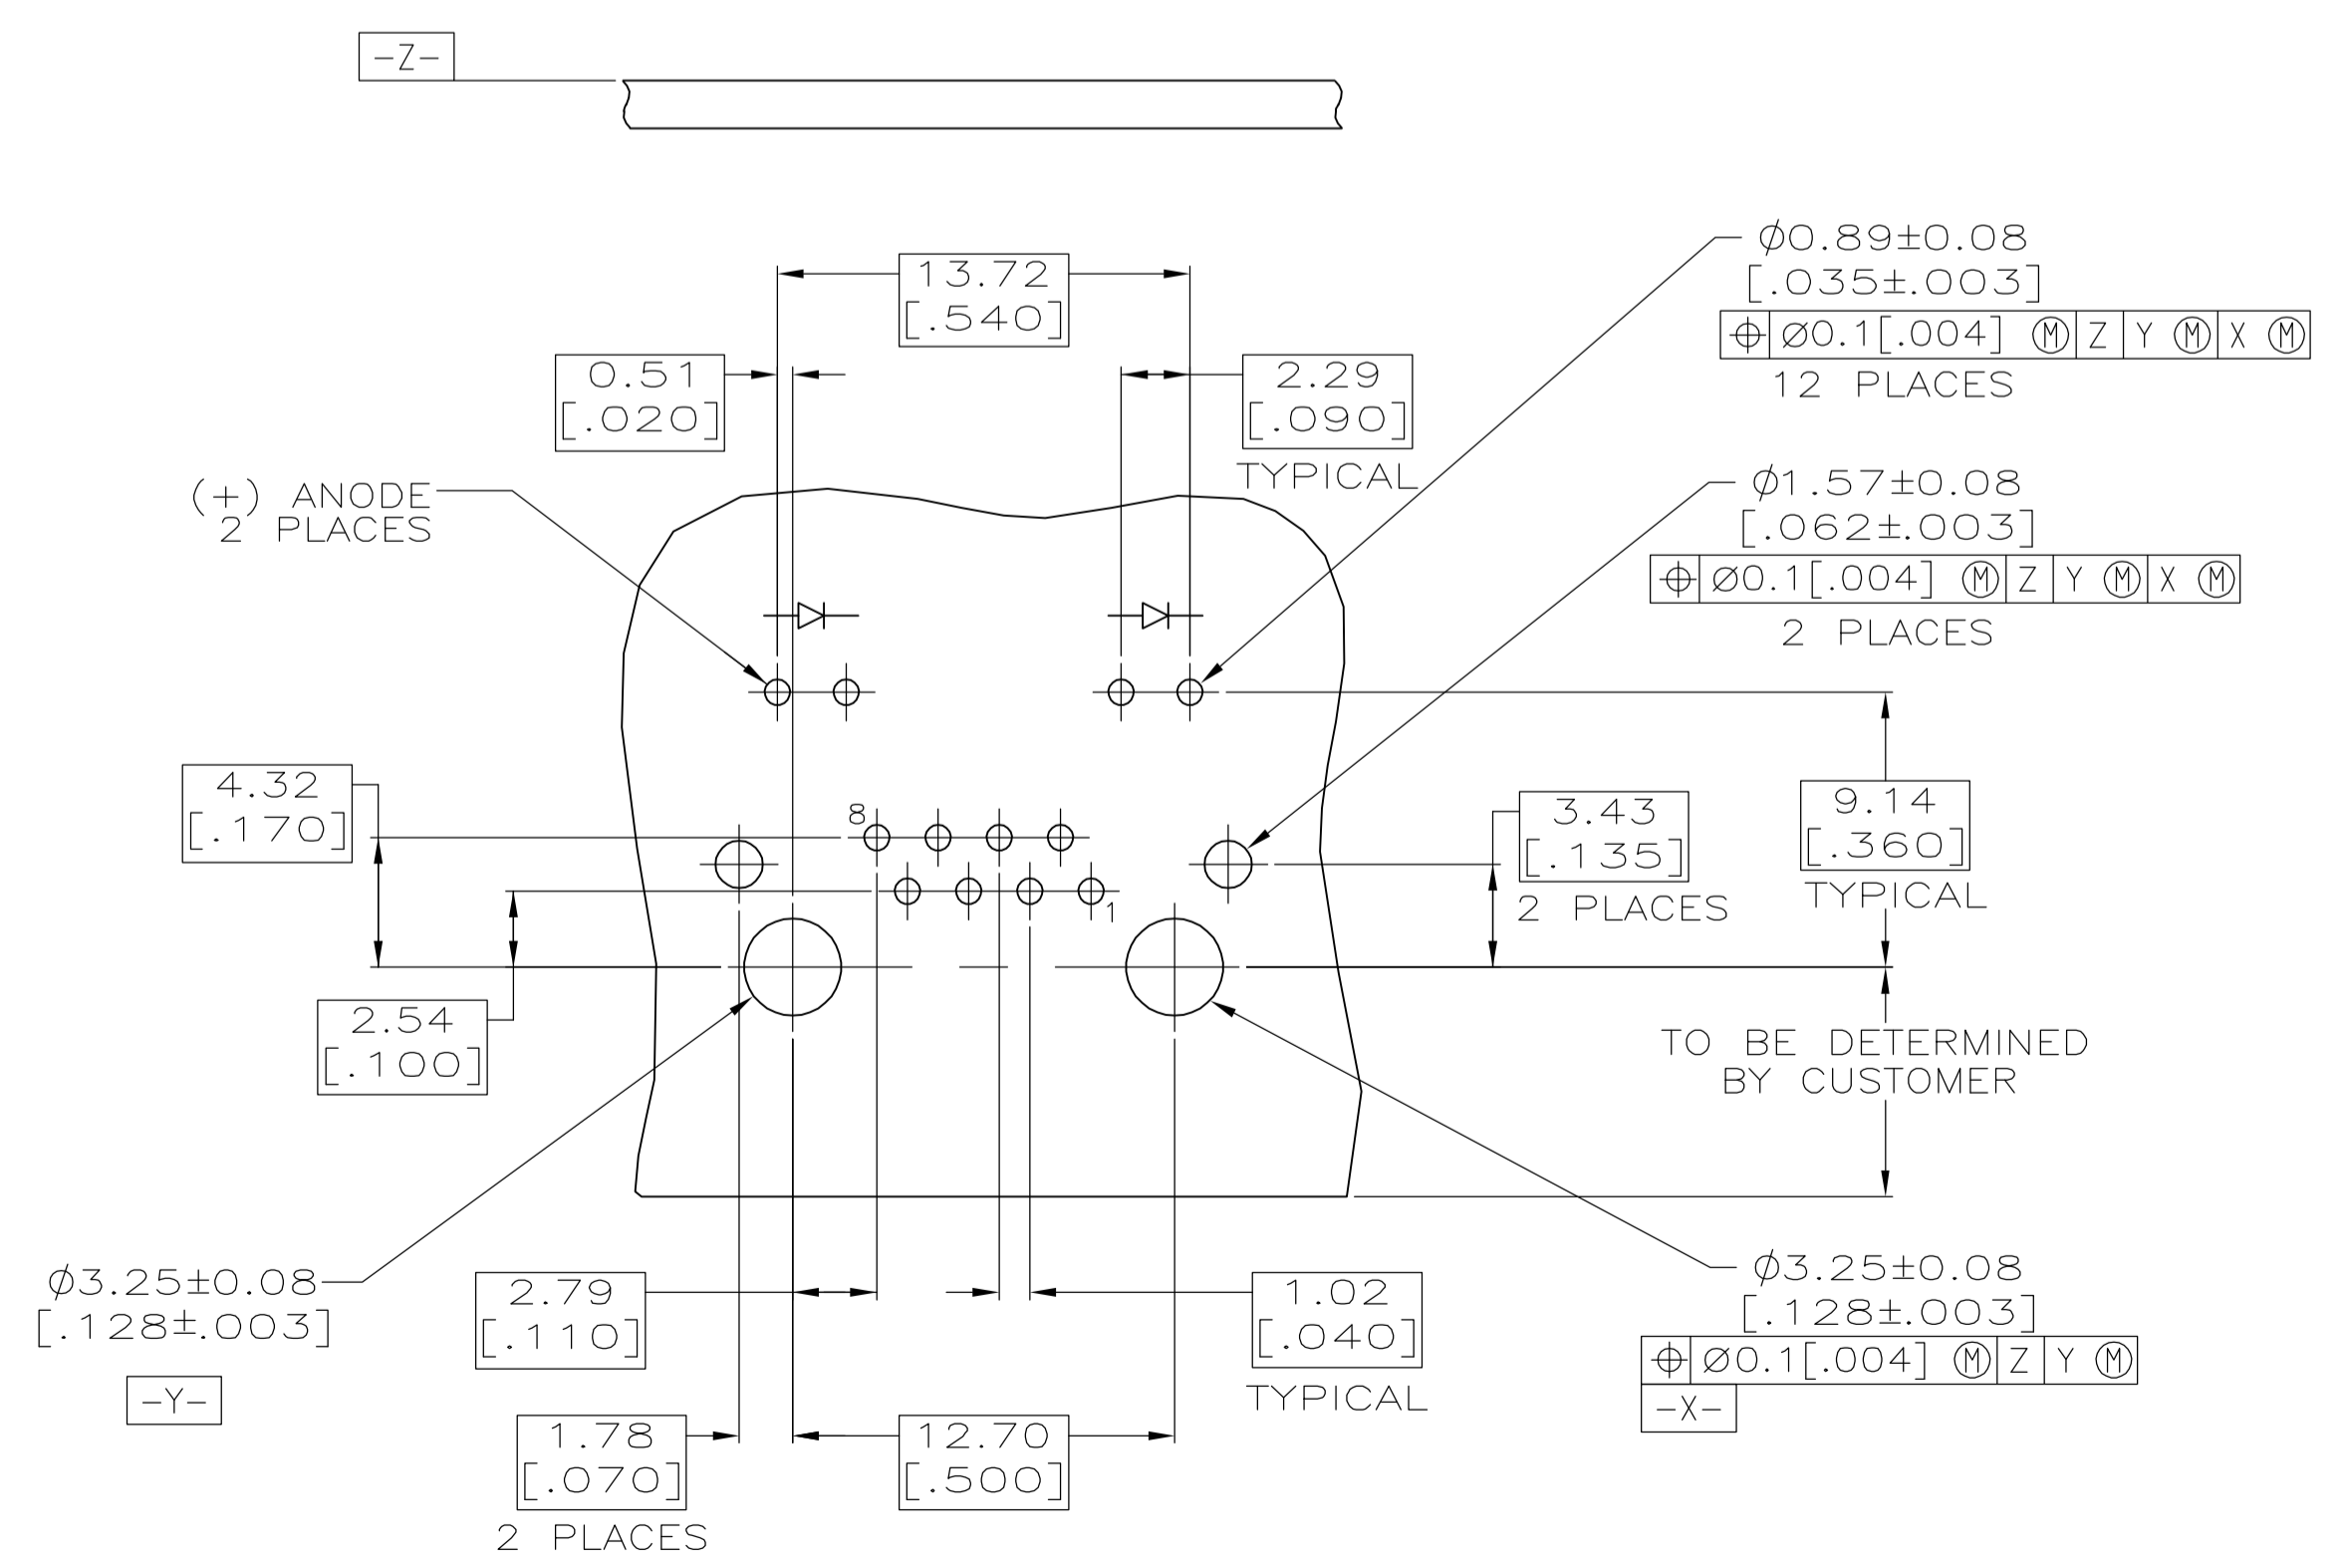

GREEN	GREEN	6116173-5
GREEN	YELLOW	6116173-4
YELLOW	GREEN	6116173-1
POSITION 2	POSITION 1	PART NUMBER
INDICATOR COLOR		

SUGGESTED PRINTED CIRCUIT BOARD LAYOUT  
 (COMPONENT SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - DOCKS 09JUN2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J. WESTMAN 09JUN2005	APVD S. FLICKINGER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
0. PLC	± -	PRODUCT SPEC		
1. PLC	± -	108-1163-4		
2. PLC	± 0.25[.01]	APPLICATION SPEC		
3. PLC	± 0.13[.005]	114-2154		
4. PLC	± -	SIZE		
ANGLES	± -	CAGE CODE		
FINISH	± -	DRAWING NO		
		RESTRICTED TO		
MATERIAL	△	WEIGHT		
		A1 00779 ©=6116173		
		CUSTOMER DRAWING		
		SCALE 1:1 SHEET 1 of 1 REV A		