THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N4	REVISED PER ECO-12-008028	27APR12	KH	MM

△1 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING

△2 POINT OF MEASUREMENT FOR PLATING THICKNESS.

△3 POSTS: .000030 GOLD IN CONTACT AREA .000100–.000200 MATTE TIN LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL

△4 POSTS: .000030 GOLD IN CONTACT AREA .000100–.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL

△5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

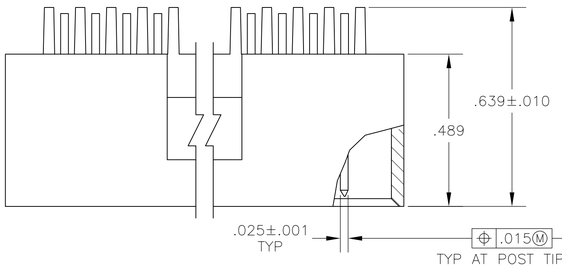

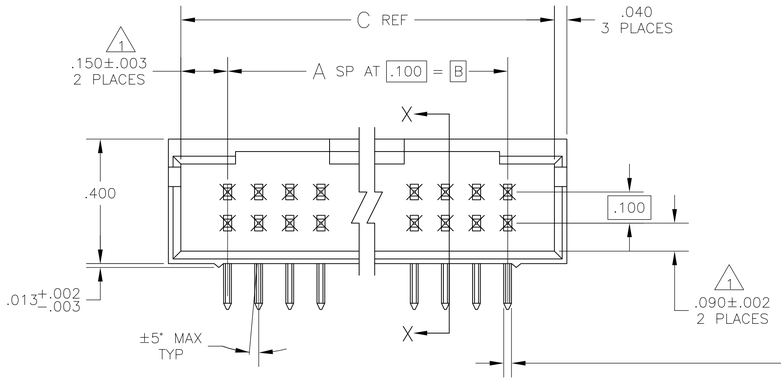

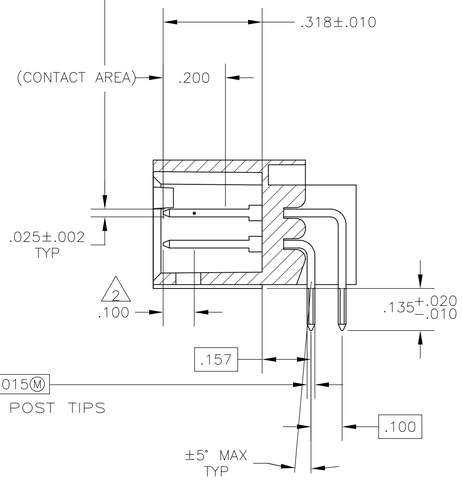

SECTION X—X

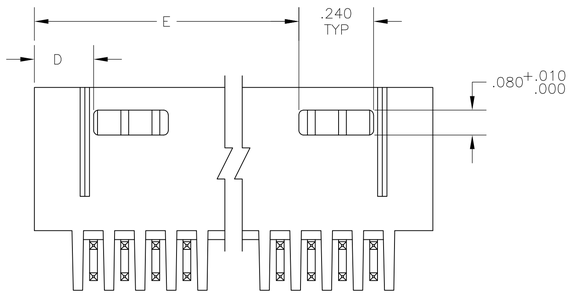

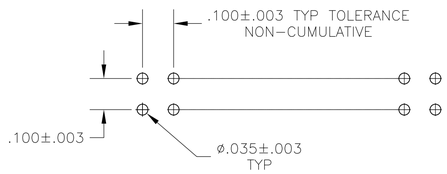

RECOMMENDED HOLE LAYOUT

△5 OBSOLETE	△4	3.490	.190	3.800	3.500	35	72	8–103167–3
△5 OBSOLETE	△4	3.390	.190	3.700	3.400	34	70	8–103167–2
	△4	3.290	.190	3.600	3.300	33	68	8–103167–1
△5 OBSOLETE	△4	3.190	.190	3.500	3.200	32	66	8–103167–0
△5 OBSOLETE	△4	3.090	.190	3.400	3.100	31	64	7–103167–9
△5 OBSOLETE	△4	2.990	.190	3.300	3.000	30	62	7–103167–8
	△4	2.890	.190	3.200	2.900	29	60	7–103167–7
△5 OBSOLETE	△4	2.790	.190	3.100	2.800	28	58	7–103167–6
△5 OBSOLETE	△4	2.690	.190	3.000	2.700	27	56	7–103167–5
△5 OBSOLETE	△4	2.590	.190	2.900	2.600	26	54	7–103167–4
△5 OBSOLETE	△4	2.490	.190	2.800	2.500	25	52	7–103167–3
△5 OBSOLETE	△4	2.390	.190	2.700	2.400	24	50	7–103167–2
△5 OBSOLETE	△4	2.290	.190	2.600	2.300	23	48	7–103167–1
△5 OBSOLETE	△4	2.190	.190	2.500	2.200	22	46	7–103167–0
△5 OBSOLETE	△4	2.090	.190	2.400	2.100	21	44	6–103167–9
△5 OBSOLETE	△4	1.990	.190	2.300	2.000	20	42	6–103167–8
	△4	1.890	.190	2.200	1.900	19	40	6–103167–7
△5 OBSOLETE	△4	1.790	.190	2.100	1.800	18	38	6–103167–6
△5 OBSOLETE	△4	1.690	.190	2.000	1.700	17	36	6–103167–5
	△4	1.590	.190	1.900	1.600	16	34	6–103167–4
△5 OBSOLETE	△4	1.490	.190	1.800	1.500	15	32	6–103167–3
	△4	1.390	.190	1.700	1.400	14	30	6–103167–2
△5 OBSOLETE	△4	1.290	.190	1.600	1.300	13	28	6–103167–1
	△4	1.190	.190	1.500	1.200	12	26	6–103167–0
	△4	1.090	.190	1.400	1.100	11	24	5–103167–9
	△4	.990	.190	1.300	1.000	10	22	5–103167–8
	△4	.890	.190	1.200	.900	9	20	5–103167–7
	△4	—	.490	1.100	.800	8	18	5–103167–6
	△4	—	.390	1.000	.700	7	16	5–103167–5
	△4	—	.390	.900	.600	6	14	5–103167–4
	△4	—	.290	.800	.500	5	12	5–103167–3
	△4	—	.290	.700	.400	4	10	5–103167–2
△5 OBSOLETE	△4	—	.190	.600	.300	3	8	5–103167–1
△5 OBSOLETE	△3	3.490	.190	3.800	3.500	35	72	3–103167–3
△5 OBSOLETE	△3	3.390	.190	3.700	3.400	34	70	3–103167–2
	△3	3.290	.190	3.600	3.300	33	68	3–103167–1
△5 OBSOLETE	△3	3.190	.190	3.500	3.200	32	66	3–103167–0
△5 OBSOLETE	△3	3.090	.190	3.400	3.100	31	64	2–103167–9
△5 OBSOLETE	△3	2.990	.190	3.300	3.000	30	62	2–103167–8
	△3	2.890	.190	3.200	2.900	29	60	2–103167–7
△5 OBSOLETE	△3	2.790	.190	3.100	2.800	28	58	2–103167–6
△5 OBSOLETE	△3	2.690	.190	3.000	2.700	27	56	2–103167–5
△5 OBSOLETE	△3	2.590	.190	2.900	2.600	26	54	2–103167–4
△5 OBSOLETE	△3	2.490	.190	2.800	2.500	25	52	2–103167–3
	△3	2.390	.190	2.700	2.400	24	50	2–103167–2
△5 OBSOLETE	△3	2.290	.190	2.600	2.300	23	48	2–103167–1
△5 OBSOLETE	△3	2.190	.190	2.500	2.200	22	46	2–103167–0
△5 OBSOLETE	△3	2.090	.190	2.400	2.100	21	44	1–103167–9
△5 OBSOLETE	△3	1.990	.190	2.300	2.000	20	42	1–103167–8
	△3	1.890	.190	2.200	1.900	19	40	1–103167–7
△5 OBSOLETE	△3	1.790	.190	2.100	1.800	18	38	1–103167–6
△5 OBSOLETE	△3	1.690	.190	2.000	1.700	17	36	1–103167–5
	△3	1.590	.190	1.900	1.600	16	34	1–103167–4
	△3	1.490	.190	1.800	1.500	15	32	1–103167–3
	△3	1.390	.190	1.700	1.400	14	30	1–103167–2
△5 OBSOLETE	△3	1.290	.190	1.600	1.300	13	28	1–103167–1
	△3	1.190	.190	1.500	1.200	12	26	1–103167–0
	△3	1.090	.190	1.400	1.100	11	24	103167–9
	△3	.990	.190	1.300	1.000	10	22	103167–8
	△3	.890	.190	1.200	.900	9	20	103167–7
△5 SUPERSEDED	△3	—	.490	1.100	.800	8	18	103167–6
	△3	—	.390	1.000	.700	7	16	103167–5
	△3	—	.390	.900	.600	6	14	103167–4
	△3	—	.290	.800	.500	5	12	103167–3
	△3	—	.290	.700	.400	4	10	103167–2
	△3	—	.190	.600	.300	3	8	103167–1
	PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: HOUSING: LCP, GLASS REINFORCED, THERMOPLASTIC, COLOR: BLACK
POST:PHOS BRONZE

FINISH: SEE TABLE

DWN H MOLL	27JUL87	TE Connectivity
CHK R FEIDT	28JUL87	
APVD R ELICKER	29JUL87	NAME: HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, .100X.100 RIGHT ANGLE, W/ .025 SQ POSTS
PRODUCT SPEC —		
APPLICATION SPEC —		
WEIGHT —		

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-103167	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV N4