THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY – ALL RIGHTS RESERVED.

LOC	DIST
AL	2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	SEE ECR 12-001772	30-Jan-12	JS	RS

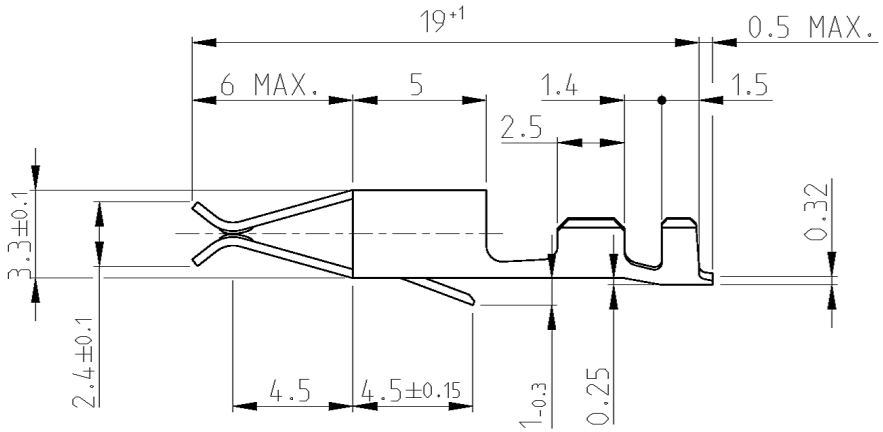





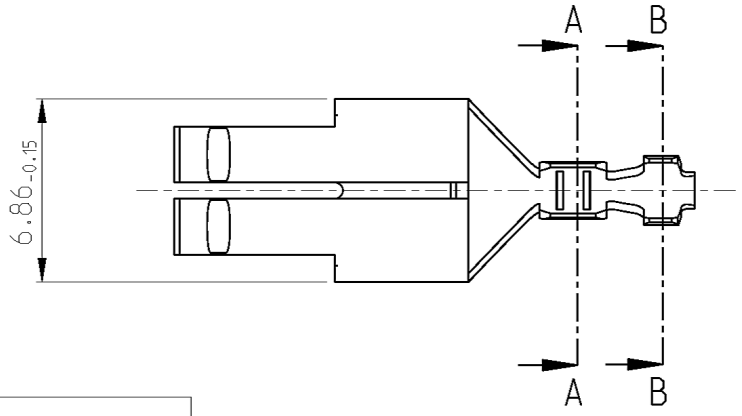

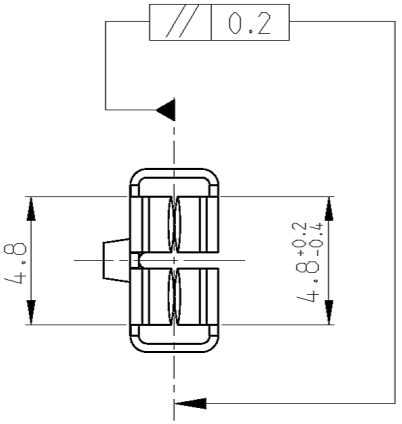

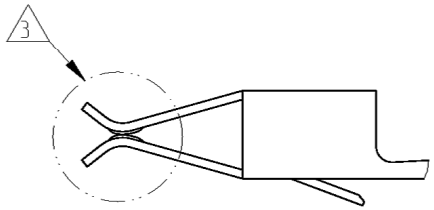

CROSS-SECTION IN mm²	SINGLE CONNECTION	0.20	0.25	0.35	0.50
0.20		X			
0.25		X			
0.35		X			
0.50		X			

NOTES

1 WIRE RANGE 0.2 – 0.5 mm²
2 INSULATION RANGE Ø1.0 – 1.6
3 SELECTIVE LUBRICATED IN INDICATED AREA WITH ANTI-FREETING LUBRICANT

LOOSE PIECE	FINISH	MATERIAL	PART NO.	REV.
	TIN (vorverzinnt)	CuZn30	3 1-926984-1	D
926985-2	TIN (vorverzinnt)	CuSn4	926984-2	D
926985-1	TIN (vorverzinnt)	CuZn30	926984-1	D

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ± ±0.2
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL –
FINISH –

DWN JS 27-Jan-12
CHK XP 27-Jan-12
APVD RS 27-Jan-12
PRODUCT SPEC 108-18054 (DES. OBJ.)
APPLICATION SPEC 114-18080
WEIGHT –

TE Connectivity

NAME STANDARD TIMER CONTACT
– –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-926984	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D1

1470-19 (3/11)

Pro/ENGINEER DRAWING