


REV. 0
DCO 16653

COIL: @ 25°C	
RESISTANCE	180 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.7 VDC
MUST RELEASE	5.4 MAX., 0.85 MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 10 g's
SHOCK	50 g's 6 MS. DURATION
TEMPERATURE	-14 °C TO +125 °C
NOTES:	OPERATE 6 MS MAX
	RELEASE 4 MS MAX
	CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

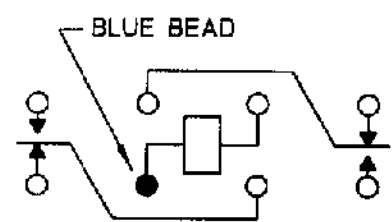

TERMINAL VIEW

CONTACT RATING: 50 µA @ 50 mV PEAK
AC OR DC 100,000,000 OPERATIONS
2 AMPS 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 11/30/00 CK. TLG 11-30-00



CUST. C. I. I. STD.
CUST. NO. REV.

"3SCV" RELAY 3SCV5004D1