



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD		
A1		REVISED PER ECR-12-001818	07FEB12	KH	GJ		

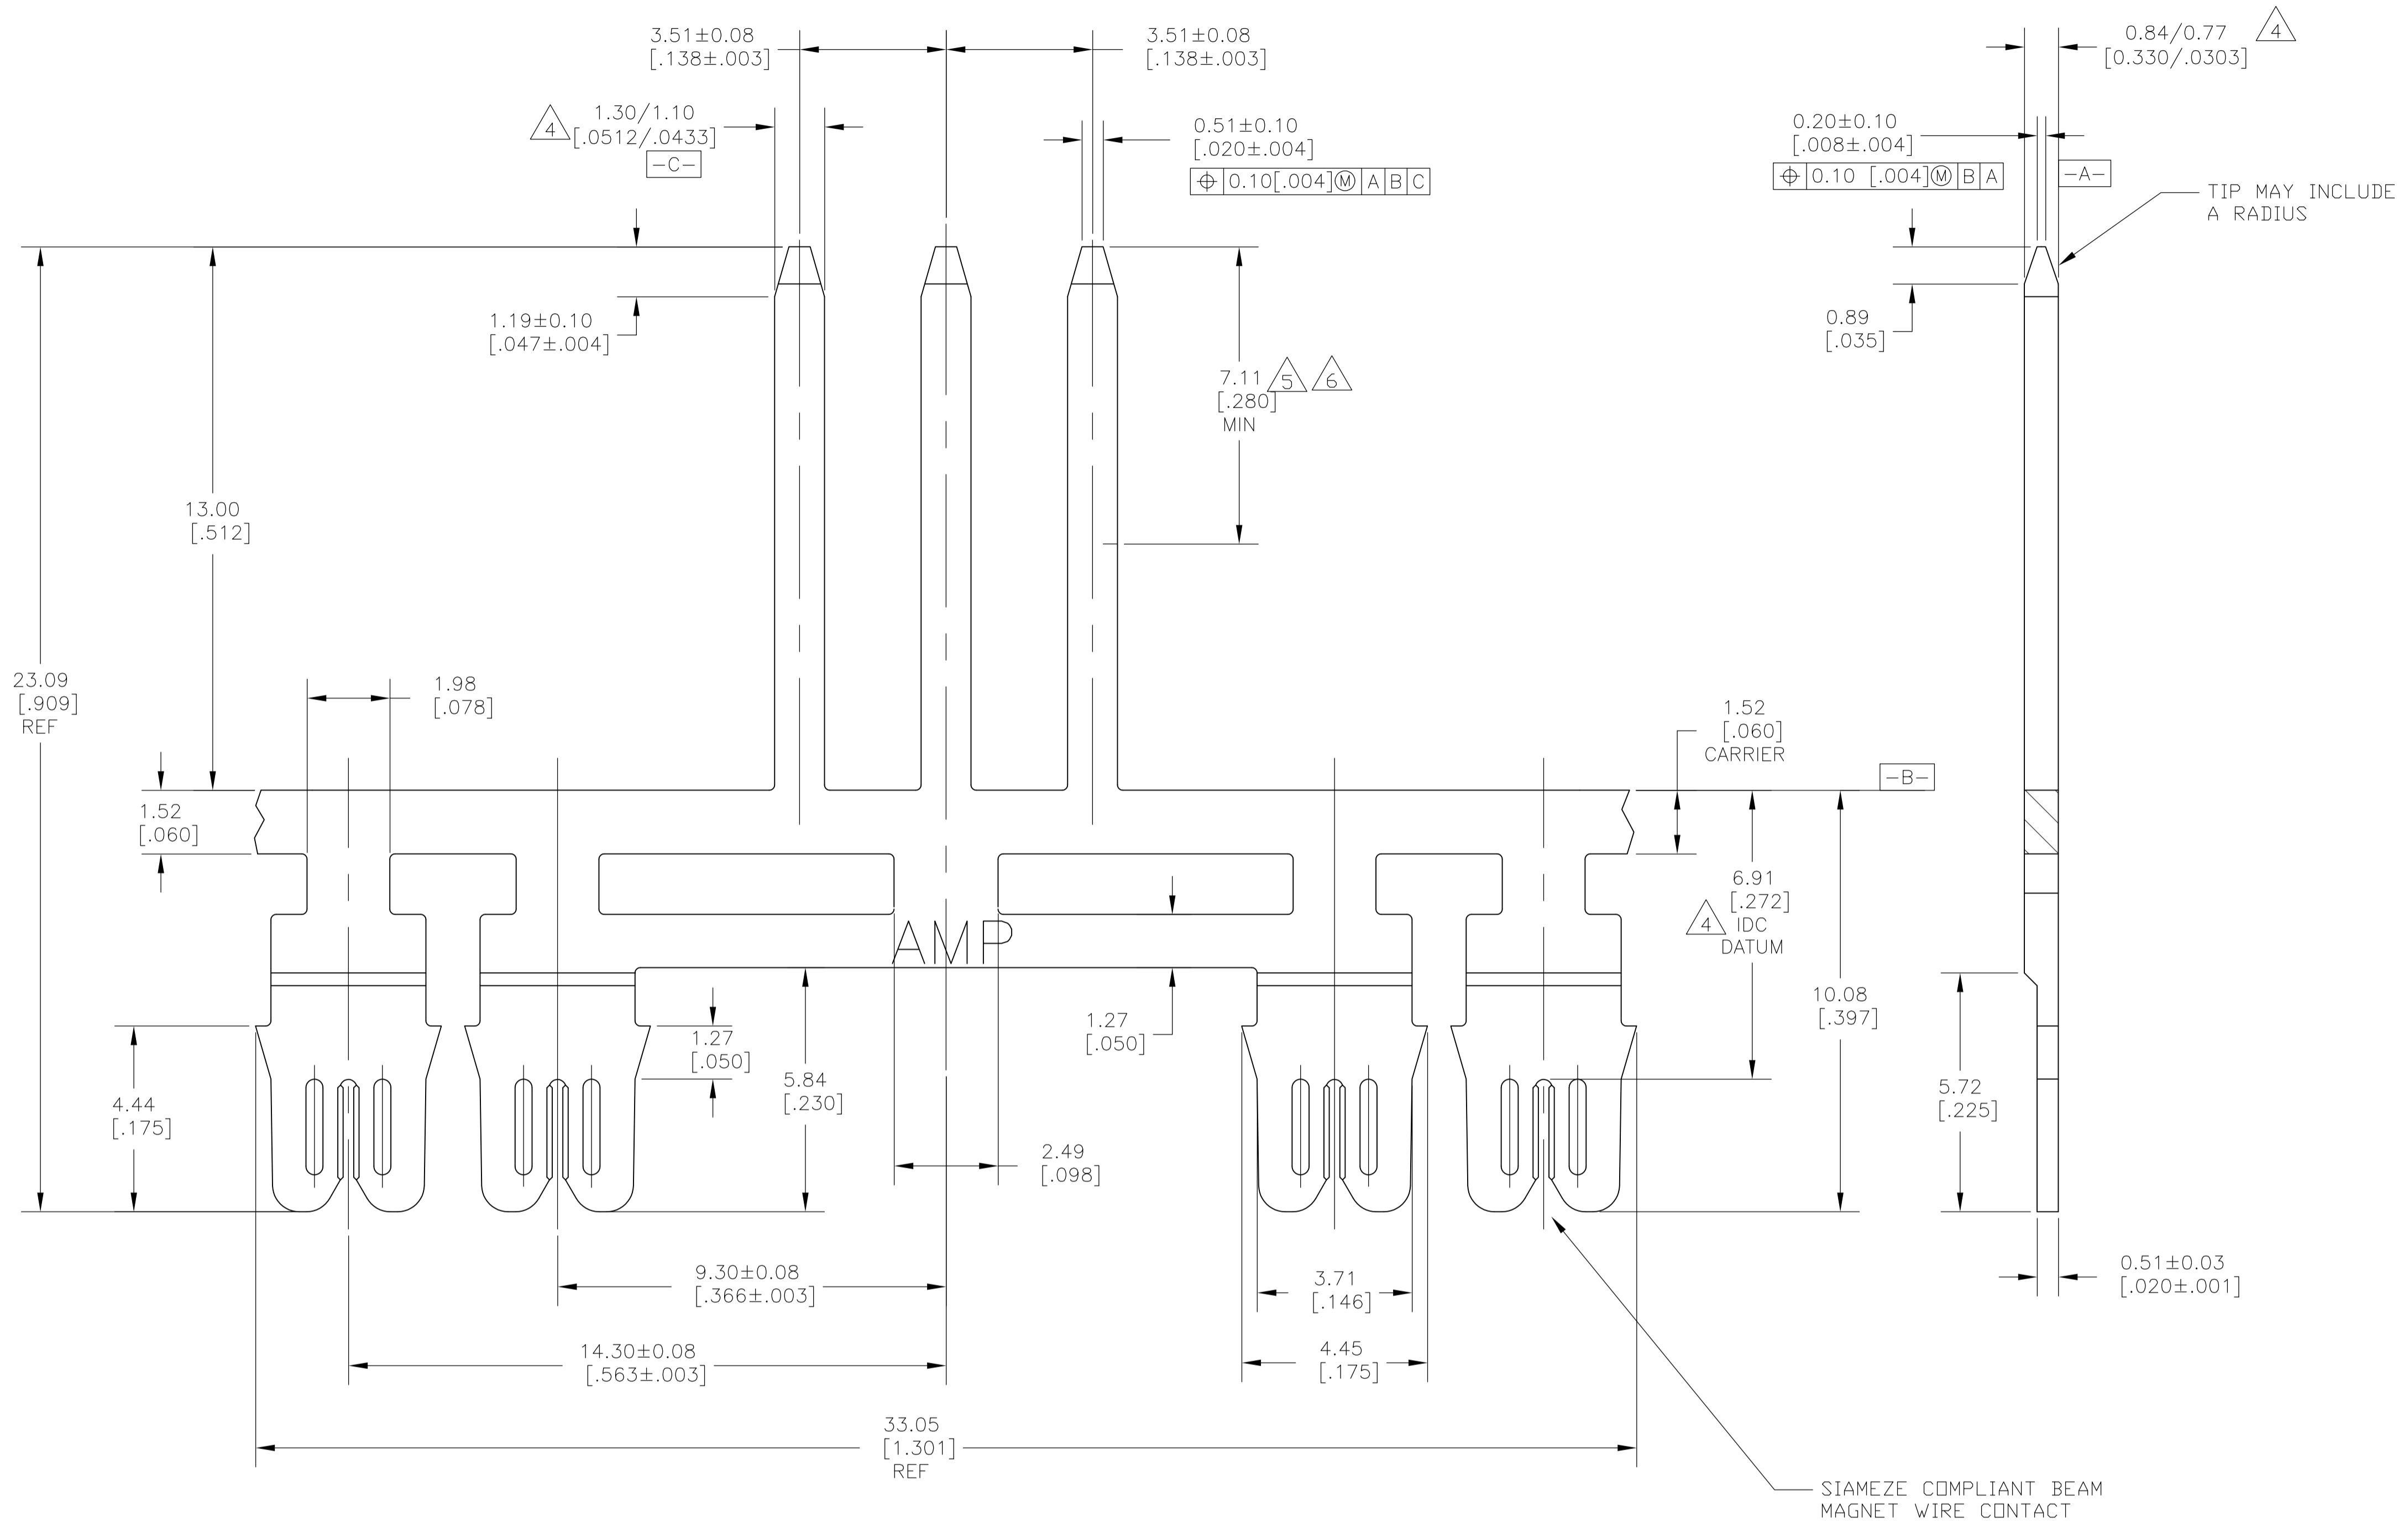

- SPECIFICATIONS: MAGNET WIRE #27.5 AWG 0.34 [.0134] COPPER.
- POCKET RECOMMENDATION: 1601424.
- TERMINAL APPLICATION TO COMPLY WITH TYCO ELECTRONICS SPEC 114-13166, CONSULT TYCO ELECTRONICS PRODUCT ENGINEERING FOR PROPER INSERTION DEPTH INTO THE CAVITIES.
- CHARACTERISTIC REQUIRED ON Q.I.P.
- THIS LENGTH SELECTIVE POST PLATED WITH SILVER 98% PURE PER ASTM B700 1.9-3.3 MICRONS THICK. ENTIRE TERMINAL POST NICKEL PLATED 1.25 MICRONS MIN.
- THIS LENGTH TO HAVE COINED EDGES WITH NO BURRS.
- TERMINALS SUPPLIED CONTINUOUS ON 33.60 [1.323] CENTERS OCCASIONAL BREAKS MAY BE PRESENT.

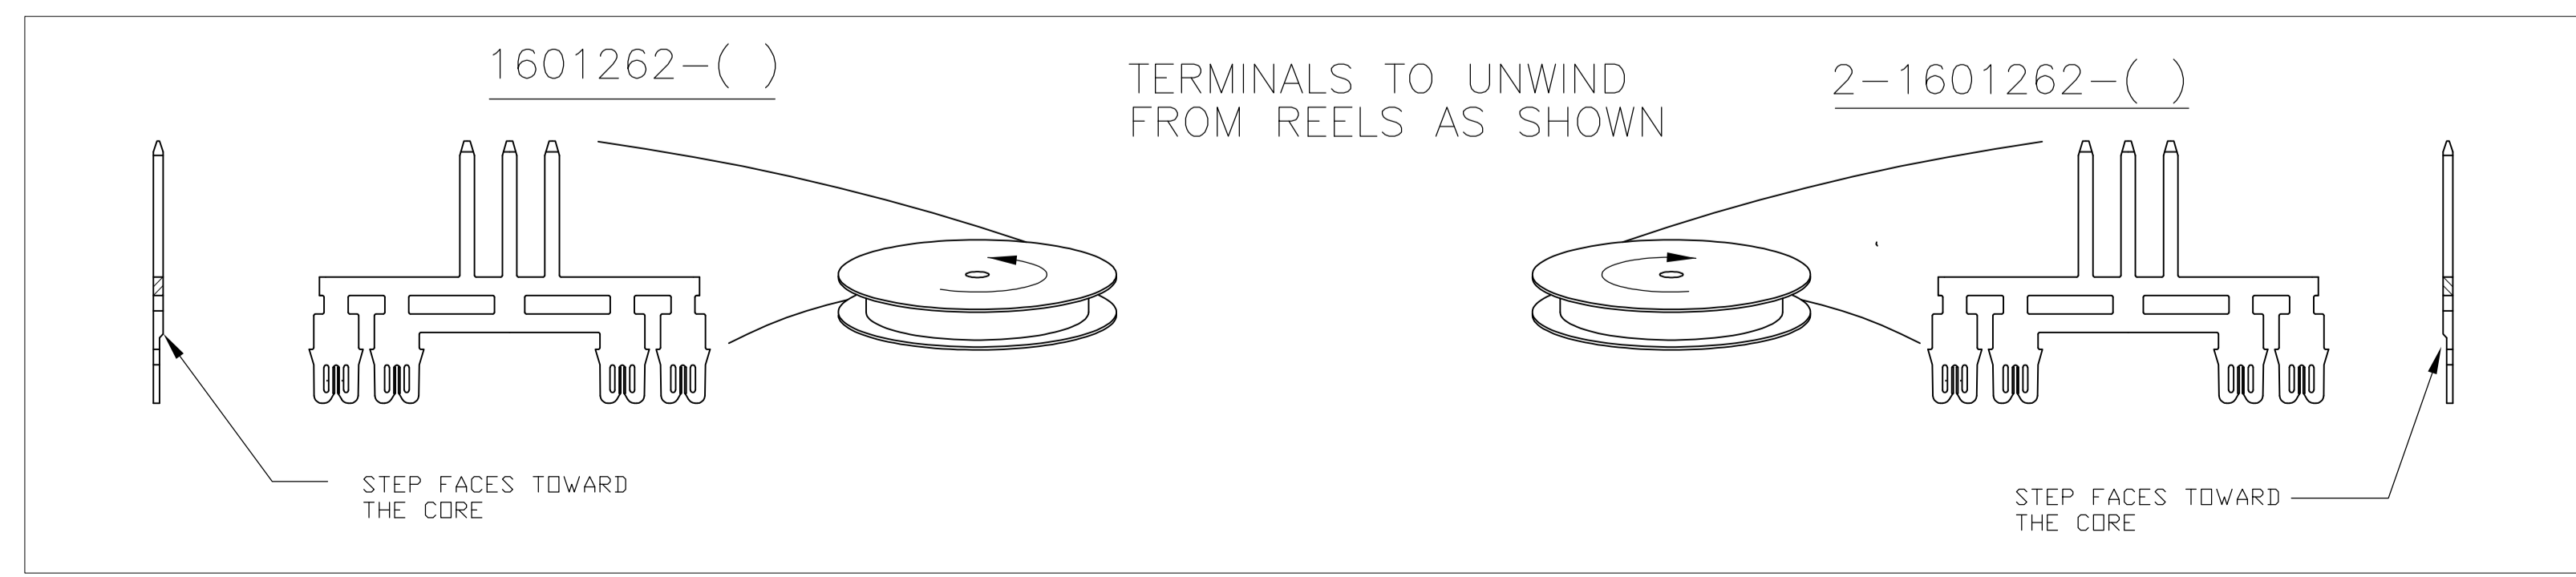

1601262-2
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN jr_ruth 02FEB11	STE TE Connectivity	
DIMENSIONS: MM [INCHES]		CHK GENE JACONO 02FEB11	NAME TRIPLE TAB, QUAD COMPLIANT BEAM, SIAMEZE TERMINAL	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GENE JACONO 02FEB11	APPLICATION SPEC 108-2085	
0 PLC	± -	SIZE	A1	RESTRICTED TO
1 PLC	± -	WEIGHT	00779	
2 PLC	± 0.13 [.005]	CAGE CODE	1601262	
3 PLC	± -	DRAWING NO	1601262	
4 PLC	± -	SCALE	10:1	
ANGLES	± 1°	SHEET	1 OF 1	
MATERIAL H03 BRASS	FINISH - 5	CUSTOMER DRAWING	SCALE	10:1