



| LOC | | DIST | | REVISIONS | | | |
|-----|---------------------------|---------|-------------|-----------|----|------|--|
| P | LTR | DATE | DESCRIPTION | DATE | DN | APVD | |
| B2 | REVISED PER ECO-11-004587 | 11MAR11 | | | RK | HMR | |

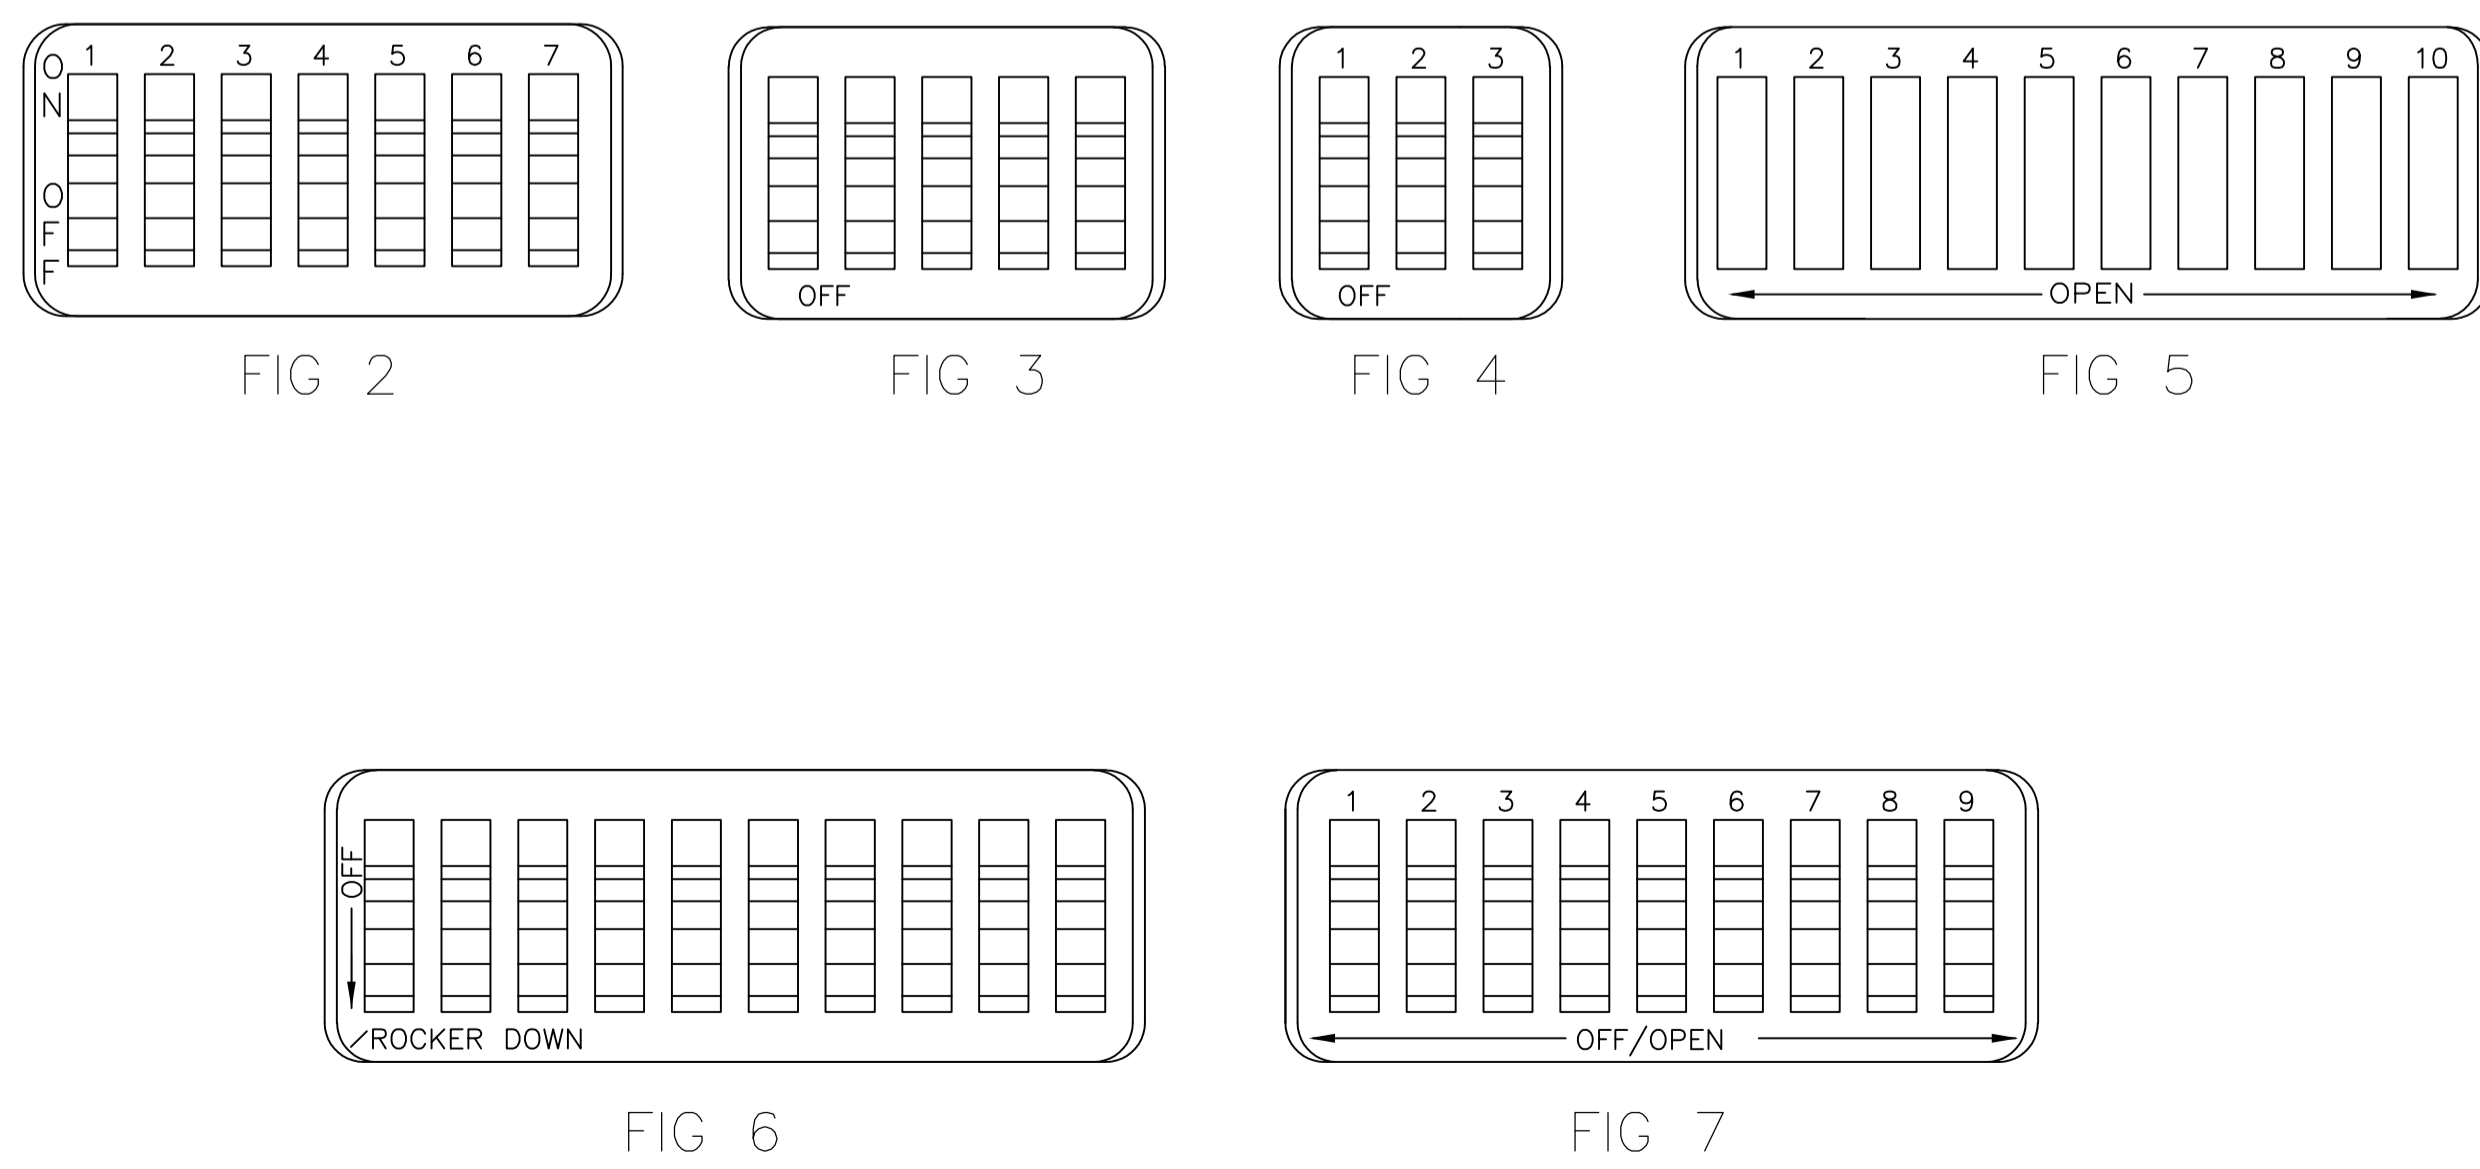

- FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7532.
- SWITCH SHOWN IN OPEN POSITION.
- ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLUE.
- STAMPING WILL VARY ON 2 AND 3 POSITION SIDES DUE TO SPACE RESTRICTIONS.
- .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300+.010 -.000 AT MOUNTING SURFACE.
- STRIPPABLE TRANSPARENT SEAL, SEE FIG 1.
- STRIPPABLE TRANSPARENT SEAL, SEE FIG 1.
- MATERIAL: HOUSING & ROCKERS- POLYESTER CONTACTS & SOLDER LEAD-COPPER ALLOY
- FINISH: CONTACTS- GOLD OVER NICKEL SOLDER LEAD- TIN OVER NICKEL
- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002 /95/EC OF 27JAN2003(ROHS).
- OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

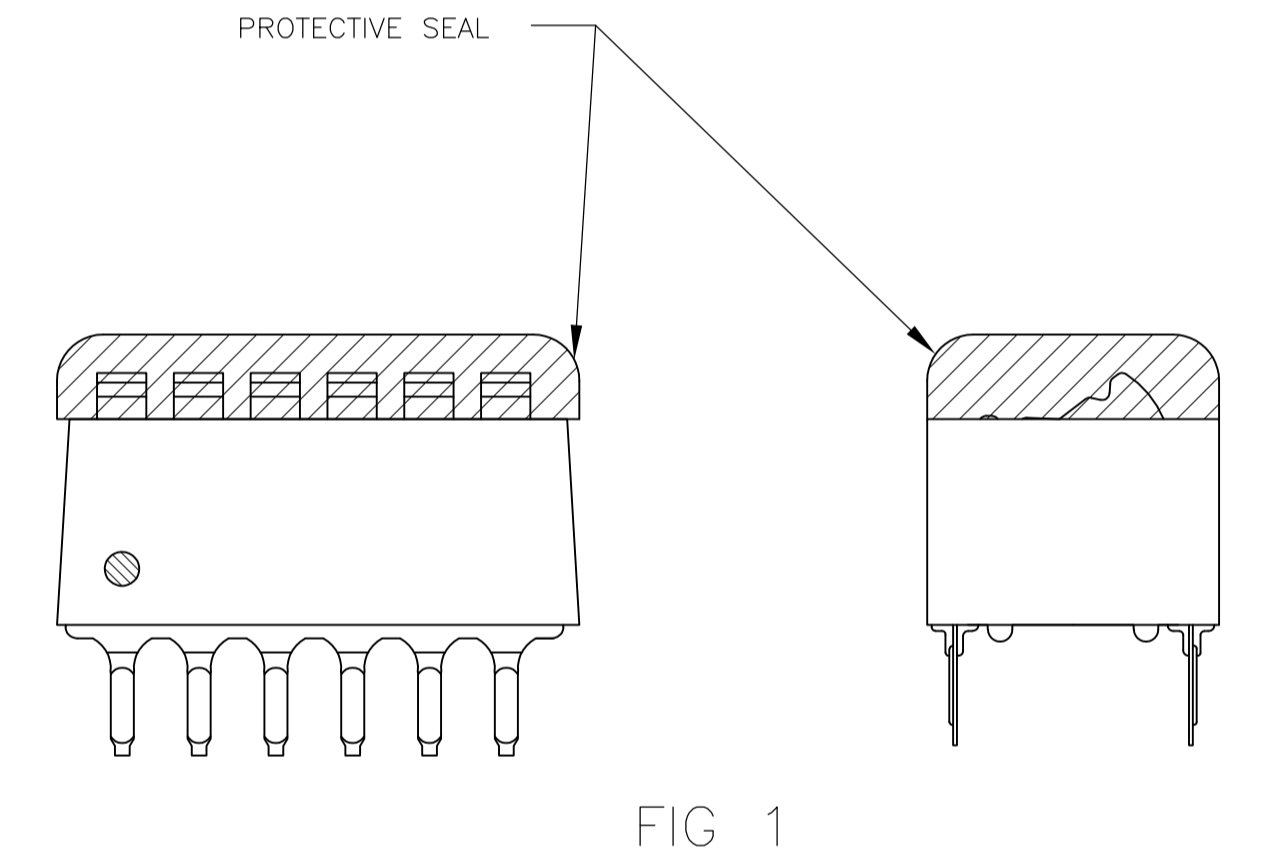

| FIG | NO OF POSN | TOP MARKING | PART NO. |
|----------|------------|-------------|----------|
| OBSOLETE | FIG 6 | 1.08 | 10 |
| | FIG 7 | .58 | 5 |
| | | .48 | 4 |
| OBSOLETE | FIG 5 | .88 | 8 |
| | | .98 | 9 |
| | FIG 2 | .68 | 6 |
| | | .58 | 5 |
| | | .48 | 4 |
| OBSOLETE | FIG 3 | .88 | 8 |
| | | .58 | 5 |
| | NONE | 1.08 | 10 |
| AS SHOWN | FIG 4 | 1.28 | 12 |
| | | 1.08 | 10 |
| | | .98 | 9 |
| | | .88 | 8 |
| | | .78 | 7 |
| | | .68 | 6 |
| | | .58 | 5 |
| | | .48 | 4 |
| | | 1.28 | 12 |
| | | .38 | 3 |
| AS SHOWN | FIG 4 | .28 | 2 |
| | | 1.08 | 10 |
| | | .98 | 9 |
| | | .88 | 8 |
| | | .68 | 6 |
| | | .58 | 5 |
| AS SHOWN | FIG 4 | .48 | 4 |
| | | .78 | 7 |
| | | 1.08 | 10 |
| | | .98 | 9 |
| | | .88 | 8 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

STE TE Connectivity

SWITCH ASSY, DIP, TYPE C, 7100 SERIES, SPST, STANDARD

00779 5435640

SCALE 4:1 SHEET 1 OF 1 REV B2