


WGC NO. 603225

| UNIT OF MEASURE | A | B | C | D | E | L | | MAX. BUNDLE DIA. | MIN. TENSILE STRENGTH |
|-----------------|------|-------|------|------|------|------|--|------------------|-----------------------|
| INCHES | .393 | .501 | .299 | .325 | .063 | 8.93 | | 2.0 | 120 lbs. |
| MM | 9.98 | 12.72 | 7.59 | 8.26 | 1.60 | 226. | | 50.8 | 54.43 kg. |

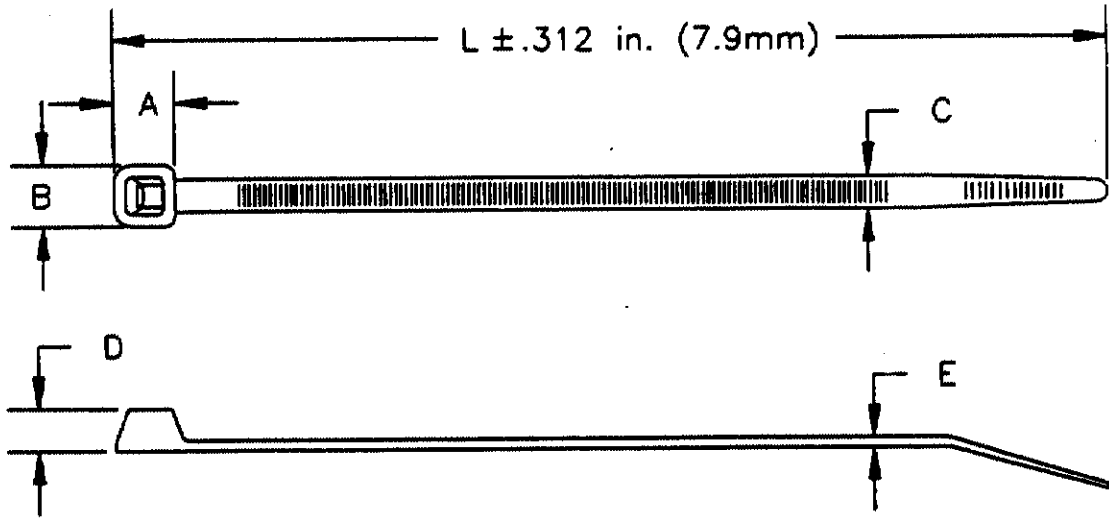

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
 2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
- ⚠ OBSOLETE
 ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Allen*

CUSTOMER DRAWING UNPUBLISHED

| | | | |
|--|--------------|-------------------|--|
| | 3-603225-9 | NATURAL 500 TY2HL | |
| | 3-603225-0 ⚠ | BLACK 500 TY2HLB | |
| | 4-603225-9 ⚠ | NATURAL 50 TY2HD | |
| | 4-603225-0 | BLACK 50 TY2HDB | |

| | | | |
|------|-----------------------|--|--|
| LOC | 0 | | |
| DIST | 1 | | |
| | DWG SIZE | PART No. | DESCRIPTION |
| | | | REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION) |
| | QTY. REQ'D. PER ASSY. | PARTS LIST | |
| | | MATERIAL | HEAT TREAT |
| | | NYLON 6/6 | FINISH |
| | | DIMENSIONS ARE IN INCHES | DRAWN BY: AD-TEK/VL |
| | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DATE: 6/25/90 |
| | | 2 PL DEC ± | APPROVED BY: |
| | | 3 PL DEC ± .039 | CHECK BY: BJM 6/90 |
| | | 4 PL DEC ± | RELEASE: J. Hamed 6/90 |
| | | ANGLES ± | AMP AMP INCORPORATED Harrisburg, Pa. |
| | | SLURF TEXTURE: J | |
| | B1 | REVISED PER ECO-09-026444 | AEG 28NOV 89 |
| | ✓ B | ECN 062890 | 3/90 6/90 |
| | P | LTR | REVISION RECORD |
| | | APC | DATE |
| | | SCALE: A | DRAWING No.: 603225 |
| | | | SHEET: 1 OF 1 |
| | | | REV.: B1 |

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.