


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
D2		REV. BY ECO 16-006304	29APR2016	HC	WLS
D3		REV. BY ECO 17-000292	10JAN2017	HC	WLS

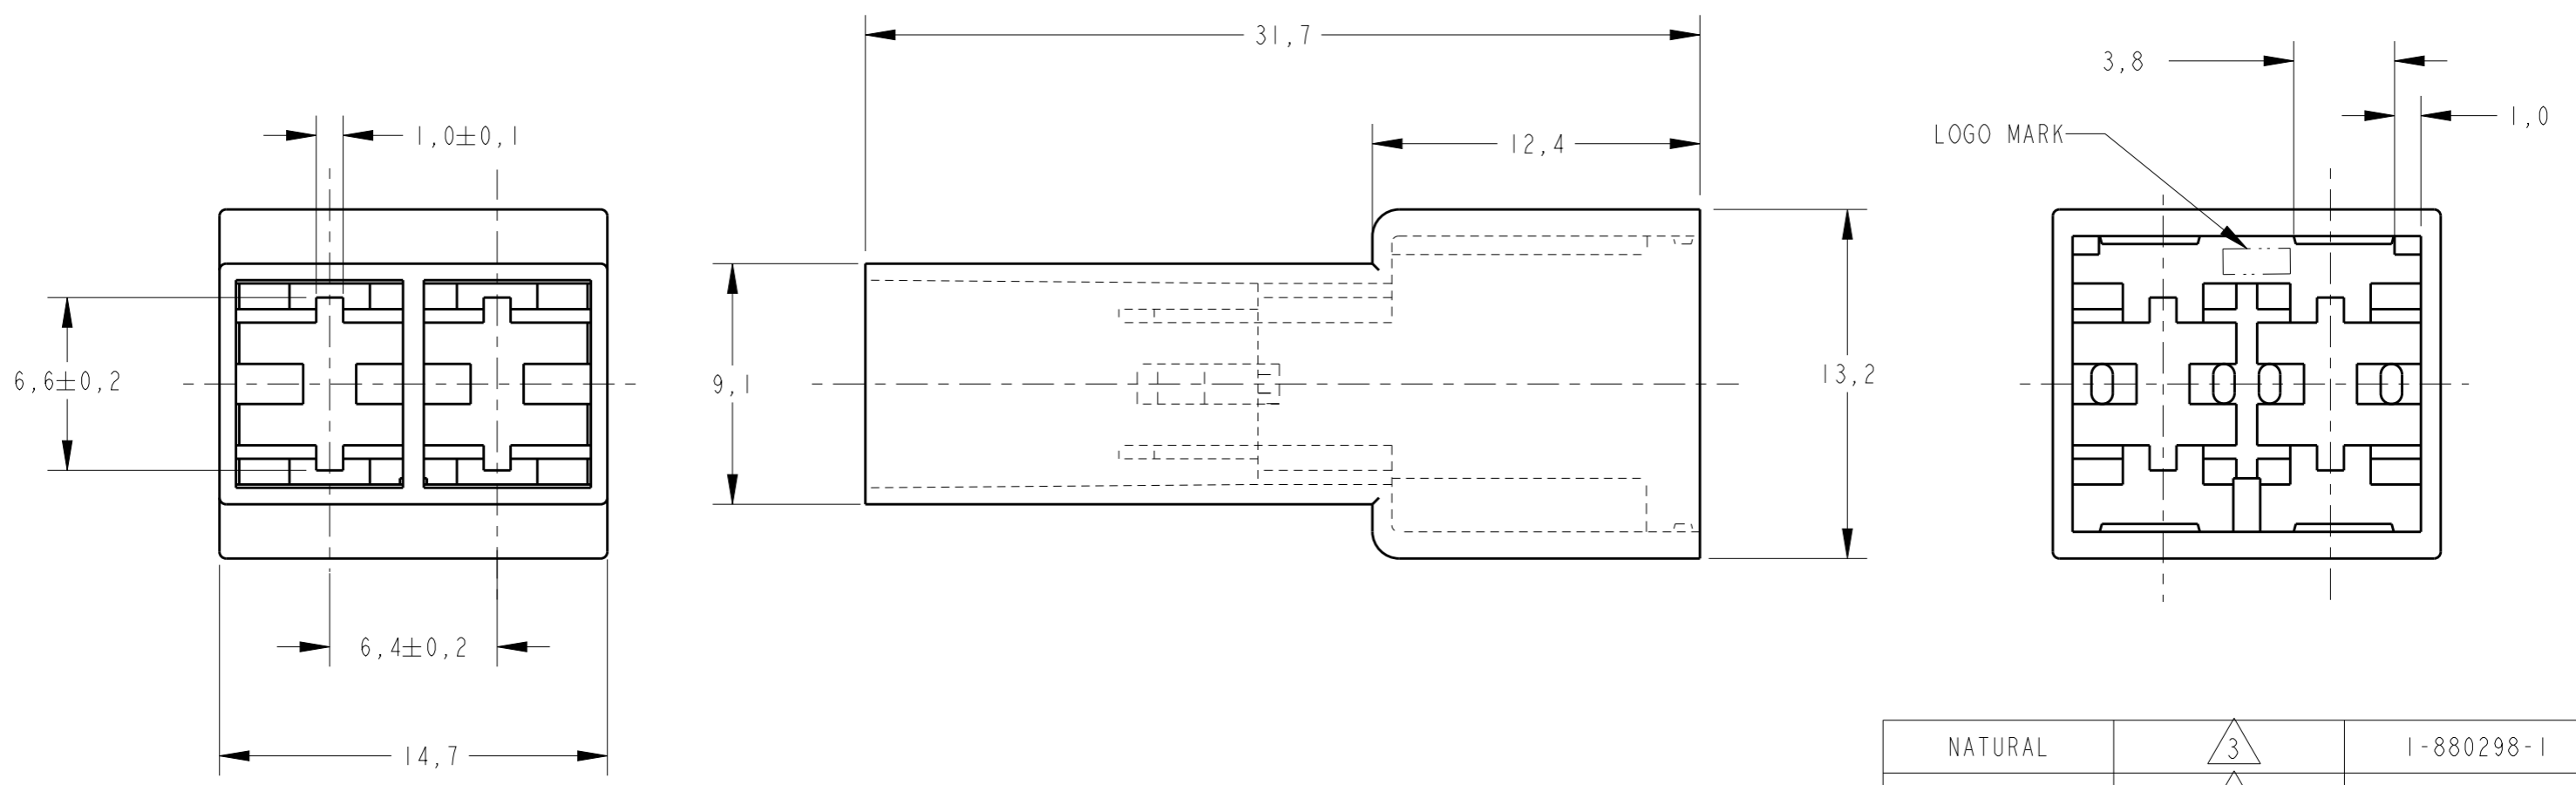

1-INTERCHANGEABLE WITH PN-180924.
 △2-PA 6.6 HEAT STABILIZED.
 △3-PA 6.6 ACC. TO SPEC. IEC 60335-1
 GWT 750C WITHOUT FLAME.

NATURAL	△3	1-880298-1
BLACK	△2	1-880298-0
VIOLET	PA 6.6	880298-9
GRAY	PA 6.6	880298-8
BROWN	PA 6.6	880298-7
BLACK	PA 6.6	880298-6
YELLOW	PA 6.6	880298-5
BLUE	PA 6.6	880298-4
GREEN	PA 6.6	880298-3
RED	PA 6.6	880298-2
NATURAL	PA 6.6	880298-1
FINISH	MATERIAL	PART NUMBER

OBSELETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.C. CANTERI 27APR2016	 TE Connectivity		
		CHK W.L. STEFANI 28APR2016			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 2 WAY .250 FASTIN-ON TAB HOUSING	
		0 PLC ±-	PRODUCT SPEC		SIZE
		1 PLC ±0,4	APPLICATION SPEC		CAGE CODE
		2 PLC ±-	WEIGHT		DRAWING NO
		3 PLC ±-	CUSTOMER DRAWING		RESTRICTED TO
		4 PLC ±-	SCALE 4:1		SHEET 1 OF 1
		ANGLES ±1°	REV D3		
MATERIAL		FINISH	DRAWING NO C-880298		
			SCALE 4:1 SHEET 1 OF 1 REV D3		