


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2007  
 © COPYRIGHT 2007 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B2		REVISED PER ECO-09-026495	16DEC09	KK	AEG
		B3		REVISED PER ECR-10-025774	07JUN11	KK	HMR


POS. PER ROW	L <sup>+0.3</sup> -0.6	PART - NO.	POS. PER ROW	L <sup>+0.3</sup> -0.6	PART - NO.
-	-	-	26	66.04	2- 828 129-6
2	5.08	828 129-2	27	68.58	2- -7
3	7.62	-3	28	71.12	2- -8
4	10.16	-4	29	73.66	2- -9
5	12.70	-5	30	76.20	3- -0
6	15.24	-6	31	78.74	3- -1
7	17.78	-7	32	81.28	3- -2
8	20.32	-8	33	83.82	3- -3
9	22.86	-9	34	86.36	3- -4
10	25.40	1- -0	35	88.90	3- -5
11	27.94	1- -1	36	91.44	3- -6
12	30.48	1- -2	37	93.98	3- -7
13	33.02	1- -3	38	96.52	3- -8
14	35.56	1- -4	39	99.06	3- -9
15	38.10	1- -5	40	101.60	4- -0
16	40.64	1- -6	41	104.14	4- -1
17	43.18	1- -7	42	106.68	4- -2
18	45.72	1- -8	43	109.22	4- -3
19	48.26	1- -9	44	111.76	4- -4
20	50.80	2- -0	45	114.30	4- -5
21	53.34	2- -1	46	116.84	4- -6
22	55.88	2- -2	47	119.38	4- -7
23	58.42	2- -3	48	121.92	4- -8
24	60.96	2- -4	49	124.46	4- -9
25	63.50	2-828 129-5	50	127.00	5- 828 129-0

OBSOLETE

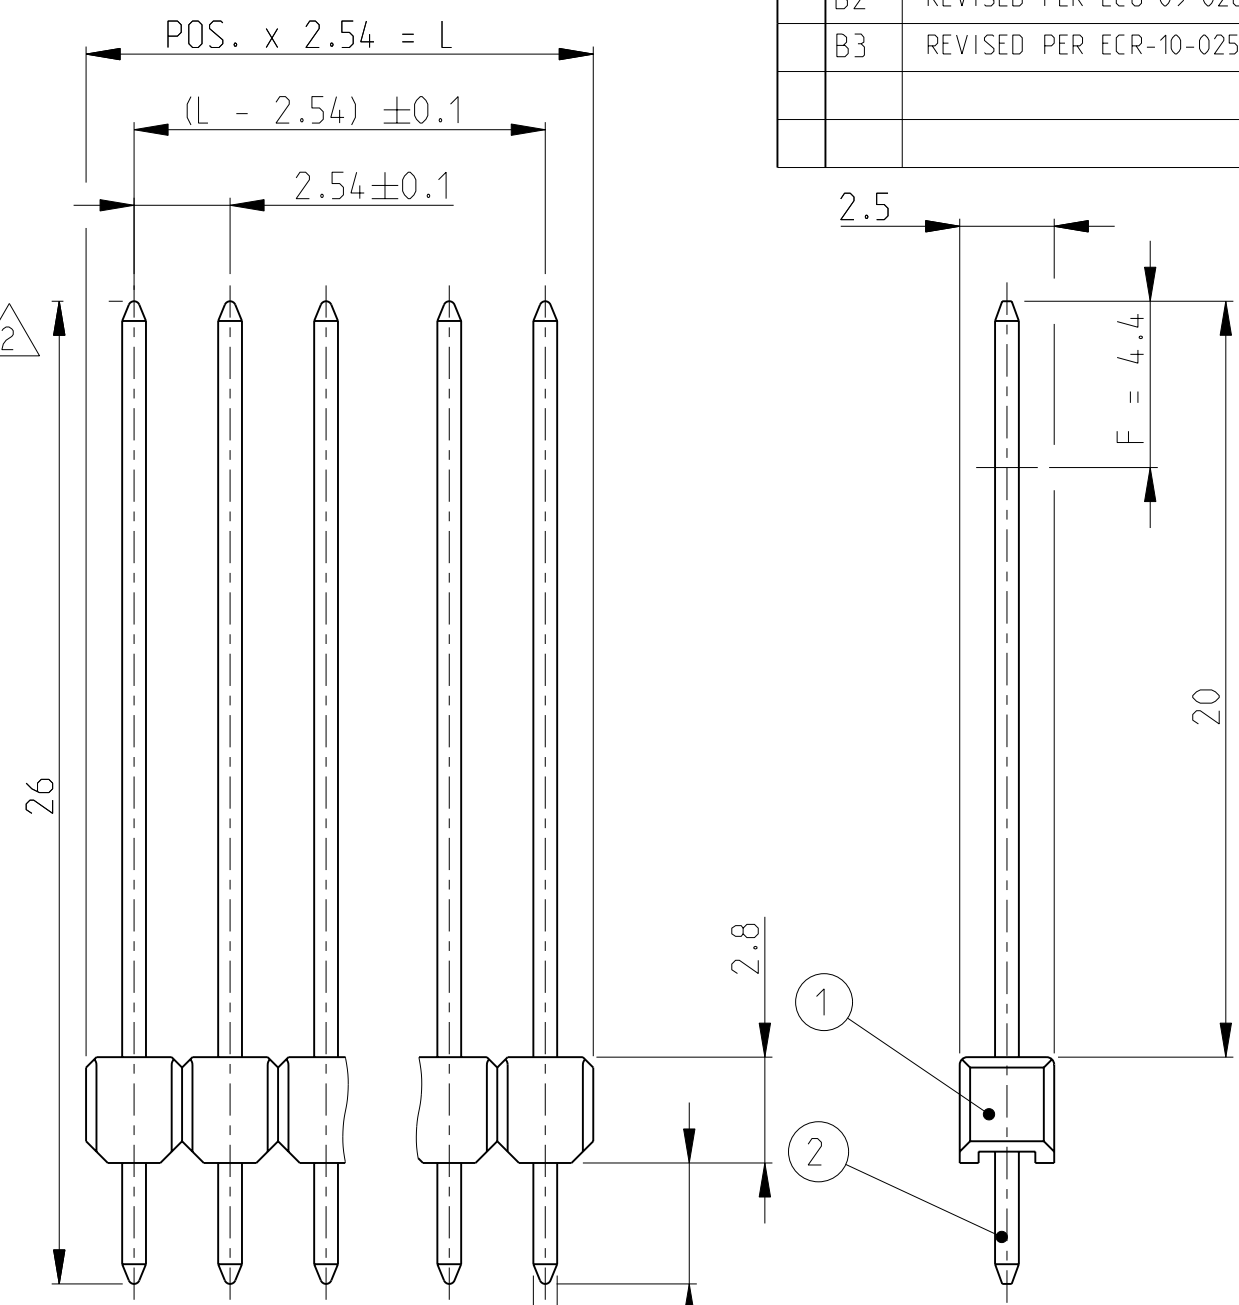

- 1 MATING SIDE:  
AREA F 0.8 μm GOLD OVER 1.27 μm NICKEL  
SOLDER SIDE:  
MIN. 3 μm TIN OVER 1.27 μm NICKEL
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING  
PER D.RENAUD/D.SINISI
- 3 OBSOLETE

PC BOARD LAYOUT  
LEITERPLATTENANSCHLUSSBILD

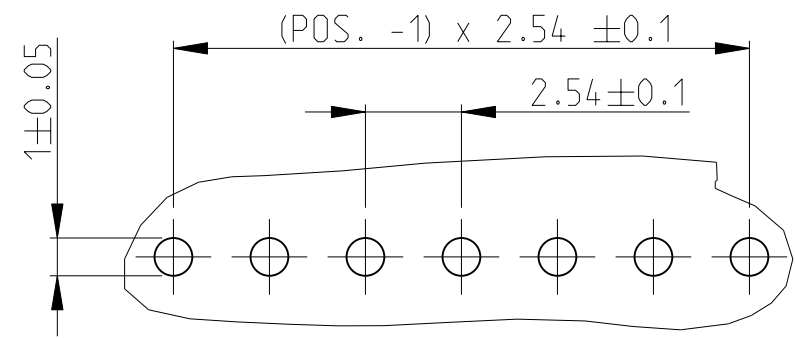

1	Cu Sn	CONTACT PIN KONTAKTSTIFT	2
COLOUR GREEN	PBT GV	PINHOUSING STIFTGEHAEUSE	1
REMARK BEMERKUNG	MATERIAL	DESCRIPTION BEZEICHNUNG	ITEM LFD. NR.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ±2° FINISH -	DWN G.HOLAUS 31AUG1989 CHK M.SCHAARSCHMIDT - APVD - PRODUCT SPEC 108-18012 APPLICATION SPEC - WEIGHT -	NAME AMPMODU II PINHEADER SINGLE ROW STIFTLAISTE EINREIHIG
MATERIAL -		CUSTOMER DRAWING	SCALE 5:1 SHEET 1 OF 1 REV B3

STE TE Connectivity

SIZE A3 CAGE CODE 00779 DRAWING NO. 828129 RESTRICTED TO -