


CUSTOMER DATA SHEET

TOLERANCE UNLESS OTHERWISE SPECIFIED
 DECIMALS $\pm .005$ FRACTIONAL $\pm 1/64$

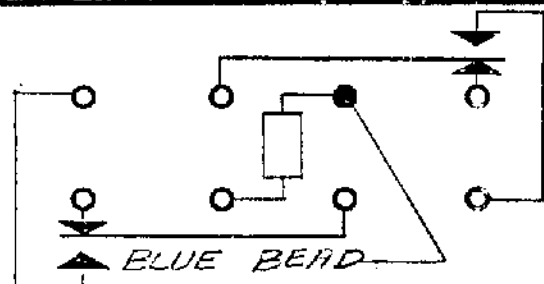

CONTACT RATING:
 2A @ 28VDC RESISTIVE

DR. 4/12/83 CK. OSW



COIL: @ 25°C	
WINDING # 1	WINDING # 2
675 $\pm 10\%$ OHMS	OHMS
13.5 VDC MUST OPERATE	MUST OPERATE
2.3 VDC Must Release	

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 \pm 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: _____

CUST. M5757/10-043
 CUST. NO. SPL

TYPE "FW" RELAY

FW 1106G06