


REV. 0
DCO 64253

TOL. = ±.010

COIL: @ 25°C			
SET		RESET	
300 OHMS ±10%		300 OHMS ±10%	
12 VDC	NOMINAL VOLTAGE	12 VDC	NOMINAL VOLTAGE
5.8 VDC	MUST OPERATE	5.8 VDC	MUST OPERATE
ENVIRONMENT:			
VIBRATION	10 Hz	3000 Hz	30 g's
SHOCK	100 g's	6 MS. DURATION	
TEMPERATURE	-65 °C	TO	+125 °C
NOTES: SET AND RESET TIME 5 MS MAX.			
CONTACT BOUNCE 1.5 MS MAX.			

CUSTOMER DATA SHEET

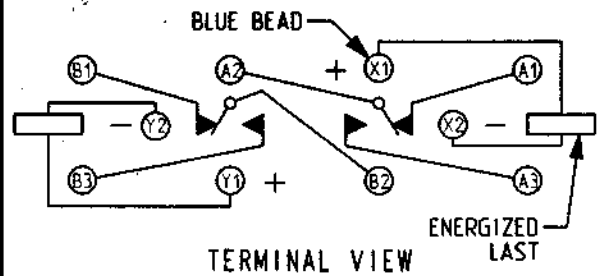

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 7 AUG 02

CK. *[Signature]*

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/32-009

TYPE "3SAM" RELAY

3SAM1827A2