

**COIL:**


RESISTANCE 700 Ω ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC

**CUSTOMER DATA SHEET**

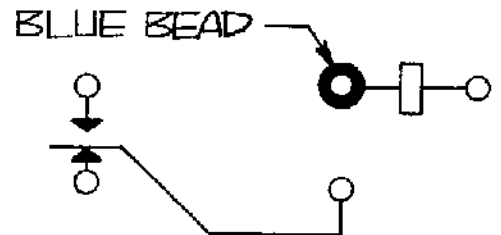

**ENVIRONMENT:**

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 5 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 10 AMP/28 VDC  
RESISTIVE 50,000 OPERATIONS

NOTES: DIELECTRIC-1000 VRMS EXCEPT  
500 VRMS ACROSS OPEN CONTACTS

DR. R. B. 1-30-91 OK. / 50/9/3MB

**Communications Instruments, Inc.**

CUST. C.I.I. STD

CUST. NO. \_\_\_\_\_

TYPE "C" RELAY

**CEW-1C-24A**